

AC axial fan

sickled blades (S series)  
Double flange wall ring

W4D350-IN22-06 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

Nominal data

|                               |                   |      |      |
|-------------------------------|-------------------|------|------|
| Type                          | W4D350-IN22-06    |      |      |
| Motor                         | M4D074-DF         |      |      |
| Phase                         |                   | 3~   | 3~   |
| Nominal voltage               | VAC               | 400  | 400  |
| Connection                    |                   | Δ    | Y    |
| Frequency                     | Hz                | 50   | 50   |
| Type of data definition       |                   | cu   | cu   |
| Valid for approval / standard |                   | CE   | CE   |
| Speed (rpm)                   | min <sup>-1</sup> | 1310 | 940  |
| Power input                   | W                 | 145  | 96   |
| Current draw                  | A                 | 0.27 | 0.16 |
| Min. ambient temperature      | °C                | -25  | -25  |
| Max. ambient temperature      | °C                | 80   | 75   |
| Starting current              | A                 | 0.75 | 0.47 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

Data according to ErP directive

|                                   |   | Actual | Request 2015 |
|-----------------------------------|---|--------|--------------|
| 01 Overall efficiency $\eta_{es}$ | % | 28.1   | 28.1         |
| 02 Measurement category           |   | A      |              |
| 03 Efficiency category            |   | Static |              |
| 04 Efficiency grade N             |   | 40     | 40           |
| 05 Variable speed drive           |   | No     |              |

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power input $P_e$          | kW                | 0.13 |
| 09 Air flow $q_v$             | m³/h              | 2255 |
| 09 Pressure increase $p_{fs}$ | Pa                | 62   |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 1315 |
| 11 Specific ratio*            |                   | 1.00 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-151875



# AC axial fan

sickled blades (S series)

Double flange wall ring

## Technical features


|                                                                    |                                                                 |
|--------------------------------------------------------------------|-----------------------------------------------------------------|
| Mass                                                               | 6.3 kg                                                          |
| Size                                                               | 350 mm                                                          |
| Surface of rotor                                                   | Coated in black                                                 |
| Material of terminal box                                           | ABS plastic                                                     |
| Material of blades                                                 | Press-fitted sheet steel blank, sprayed with PP plastic         |
| Material of mounting ring                                          | Steel, coated in black plastic (RAL 9005)                       |
| Material of wall ring                                              | Sheet steel, galvanised and coated in black plastic (RAL 9005)  |
| Material of guard grille                                           | Steel, phosphated and coated in black plastic (RAL 9005)        |
| Number of blades                                                   | 5                                                               |
| Direction of air flow                                              | "V"                                                             |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                                |
| Type of protection                                                 | IP 44; Depending on installation and position as per EN 60034-5 |
| Insulation class                                                   | "F"                                                             |
| Humidity (F)/environmental protection class (H)                    | F2-2                                                            |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                         |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                         |
| Mounting position                                                  | Shaft horizontal or rotor on bottom; rotor on top on request    |
| Condensate discharge holes                                         | Rotor-side                                                      |
| Operation mode                                                     | S1                                                              |
| Motor bearing                                                      | Ball bearing                                                    |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA                                                       |
| Electrical leads                                                   | Via terminal box                                                |
| Motor protection                                                   | Thermal overload protector (TOP) brought out, basic insulation  |
| Cable exit                                                         | Variable                                                        |
| Protection class                                                   | I (if protective earth is connected by customer)                |
| Product conforming to standard                                     | EN 60335-1; CE                                                  |



# AC axial fan

sickled blades (S series)  
Double flange wall ring

## Product drawing

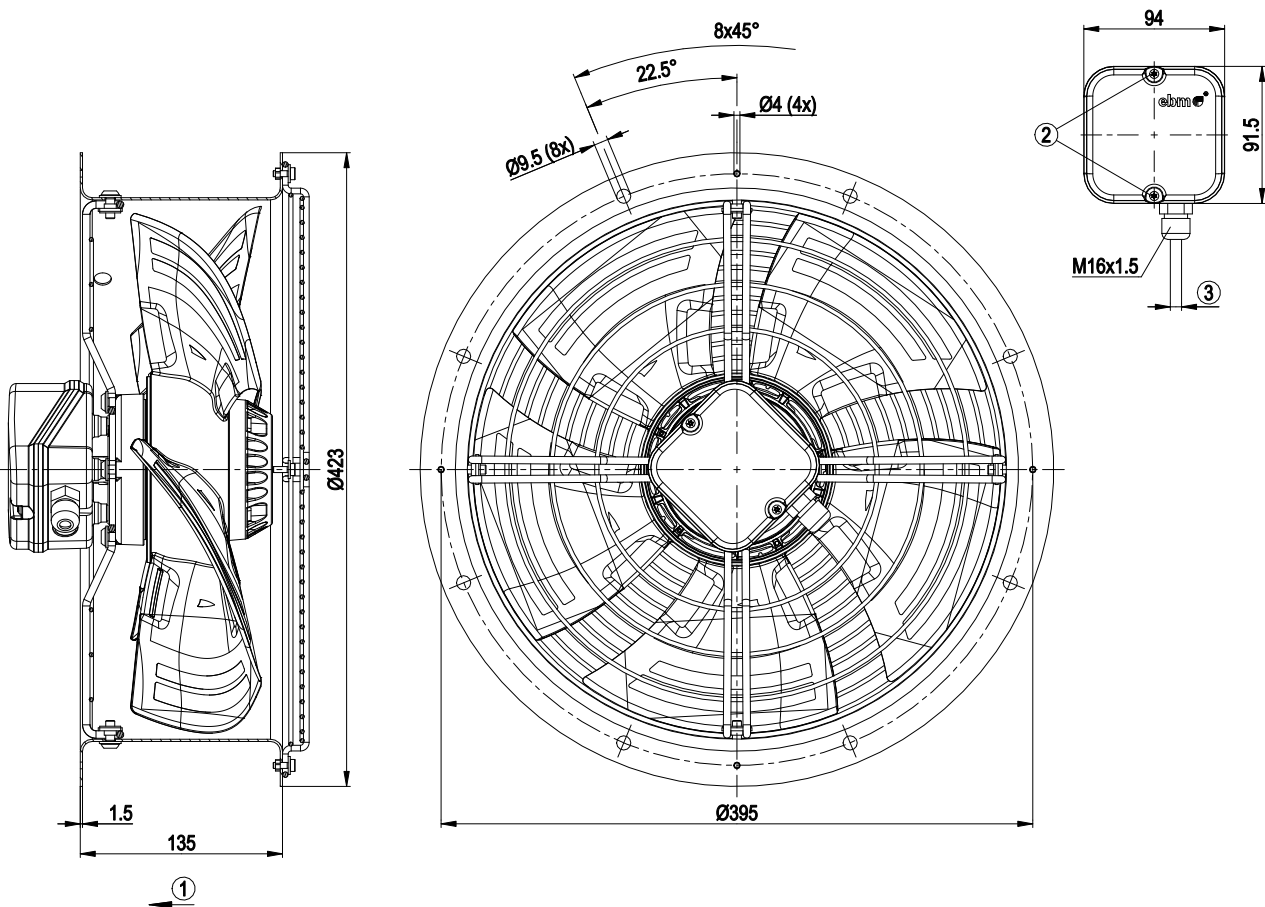


|   |                                                                |
|---|----------------------------------------------------------------|
| 1 | Direction of air flow "V"                                      |
| 2 | Tightening torque $0.8 \pm 0.15$ Nm                            |
| 3 | Cable diameter max. 7.5 mm, tightening torque $1.3 \pm 0.2$ Nm |



AC axial fan  
sickled blades (S series)  
Double flange wall ring

Connection screen

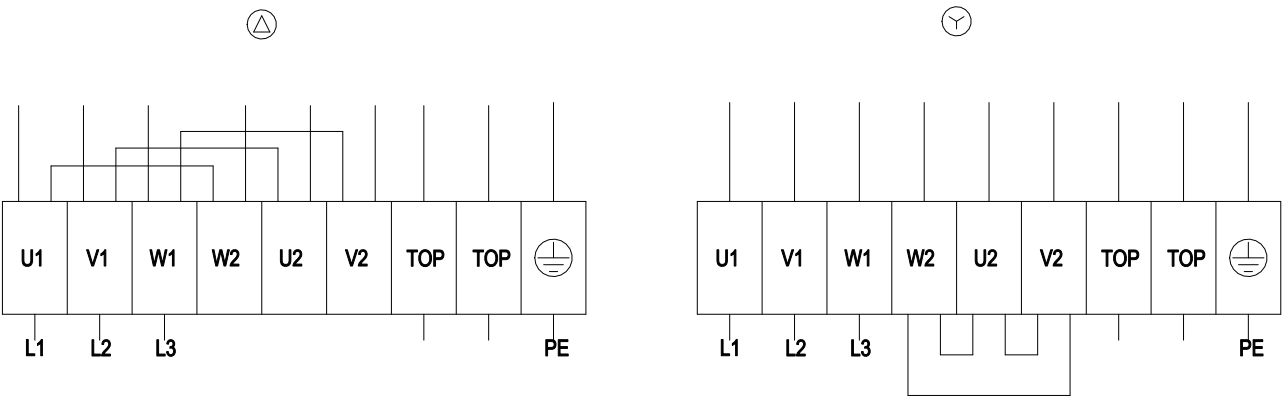


|    |                  |    |                 |     |              |
|----|------------------|----|-----------------|-----|--------------|
| Δ  | Delta-connection | Y  | Star connection | L1  | = U1 = black |
| L2 | = V1 = blue      | L3 | = W1 = brown    | W2  | yellow       |
| U2 | green            | V2 | white           | TOP | 2 x grey     |
| PE | green / yellow   |    |                 |     |              |



AC axial fan  
sickled blades (S series)  
Double flange wall ring

Charts: Air flow 50 Hz

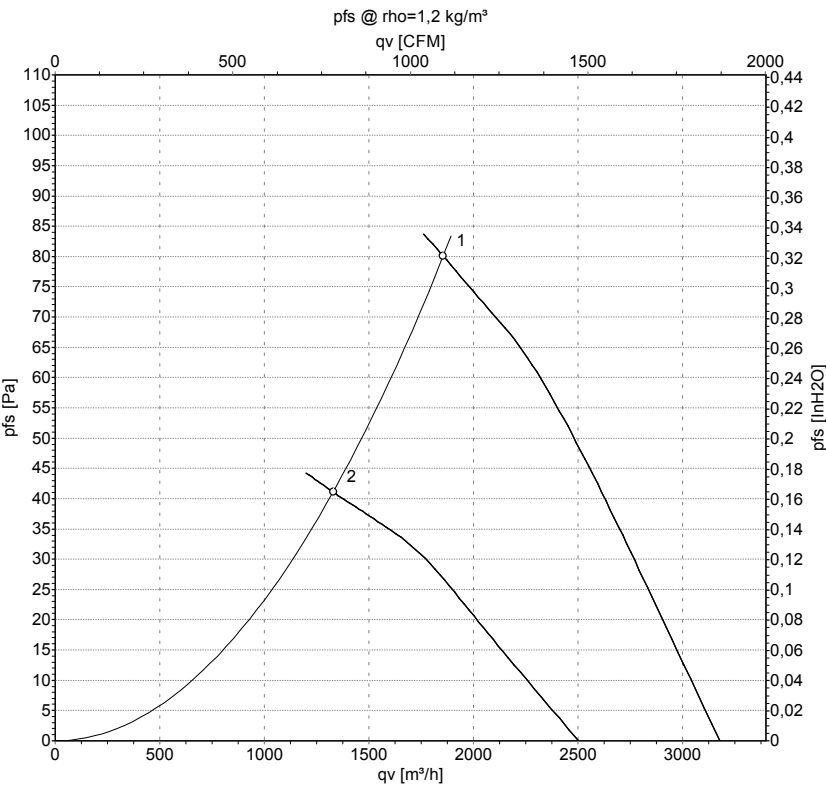

Measurement: LU-151875-1  
Measurement: LU-140571-1

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: LwA measured as per ISO 13347 /  
LpA measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|----------------|-----------------|----------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h           | Pa              | cfm            | inH2O           |
| 1 | Δ     | 400 | 50 | 1310              | 145            | 0.27 | 1855           | 80              | 1090           | 0.32            |
| 2 | Y     | 400 | 50 | 940               | 96             | 0.16 | 1330           | 41              | 785            | 0.16            |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

