

## Nominal data

|                               |                   |      |      |      |      |
|-------------------------------|-------------------|------|------|------|------|
| Type                          | W4D450-CU01-01    |      |      |      |      |
| Motor                         | M4D094-EA         |      |      |      |      |
| Phase                         |                   | 3~   | 3~   | 3~   | 3~   |
| Nominal voltage               | VAC               | 400  | 400  | 400  | 400  |
| Connection                    |                   | Δ    | Y    | Δ    | Y    |
| Frequency                     | Hz                | 50   | 50   | 60   | 60   |
| Type of data definition       |                   | ml   | ml   | ml   | ml   |
| Valid for approval / standard |                   | CE   | CE   | CE   | CE   |
| Speed                         | min <sup>-1</sup> | 1250 | 875  | 1360 | 860  |
| Power input                   | W                 | 340  | 200  | 415  | 205  |
| Current draw                  | A                 | 0.61 | 0.33 | 0.70 | 0.35 |
| Max. back pressure            | Pa                | 120  | 60   | 85   | 35   |
| Min. ambient temperature      | °C                | -40  | -40  | -40  | -40  |
| Max. ambient temperature      | °C                | 60   | 60   | 50   | 50   |
| Starting current              | A                 | 1.7  | 0.55 | 1.57 | 0.51 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

|                       |        |
|-----------------------|--------|
| Installation category | A      |
| Efficiency category   | Static |
| Variable speed drive  | No     |
| Specific ratio*       | 1.00   |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

|                                |                   | Actual | Request 2013 | Request 2015 |
|--------------------------------|-------------------|--------|--------------|--------------|
| Overall efficiency $\eta_{es}$ | %                 | 32     | 26.4         | 30.4         |
| Efficiency grade N             |                   | 41.6   | 36           | 40           |
| Power input $P_e$              | kW                | 0.3    |              |              |
| Air flow $q_v$                 | m <sup>3</sup> /h | 3610   |              |              |
| Pressure increase $p_{fs}$     | Pa                | 96     |              |              |
| Speed n                        | min <sup>-1</sup> | 1285   |              |              |

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

LU-72632

## Technical features


|                                                                    |                                                              |
|--------------------------------------------------------------------|--------------------------------------------------------------|
| Mass                                                               | 9.6 kg                                                       |
| Size                                                               | 450 mm                                                       |
| Surface of rotor                                                   | Coated in black                                              |
| Material of terminal box                                           | ABS plastic, black                                           |
| Material of blades                                                 | Press-fitted sheet steel blank, sprayed with PP plastic      |
| Material of wall ring                                              | Sheet steel, pre-galvanised and coated in black plastic      |
| Material of guard grille                                           | Steel, phosphated and coated in black plastic                |
| Number of blades                                                   | 5                                                            |
| Direction of air flow                                              | "V"                                                          |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                             |
| Type of protection                                                 | IP 54                                                        |
| Insulation class                                                   | "F"                                                          |
| Humidity class                                                     | F4-1                                                         |
| Max. permissible ambient motor temp. (transp./ storage)            | +80 °C                                                       |
| Min. permissible ambient motor temp. (transp./storage)             | -40 °C                                                       |
| Mounting position                                                  | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensate discharge holes                                         | Rotor-side                                                   |
| Motor bearing                                                      | Ball bearing                                                 |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                    |
| Electrical leads                                                   | Via terminal box                                             |
| Motor protection                                                   | Thermal overload protector (TOP) brought out                 |
| Protection class                                                   | I (if protective earth is connected by customer)             |
| Product conforming to standard                                     | CE                                                           |
| Approval                                                           | CCC; EAC                                                     |

## AC axial fan - HyBlade®

sickled blades (S series)

with full round nozzle

## Product drawing

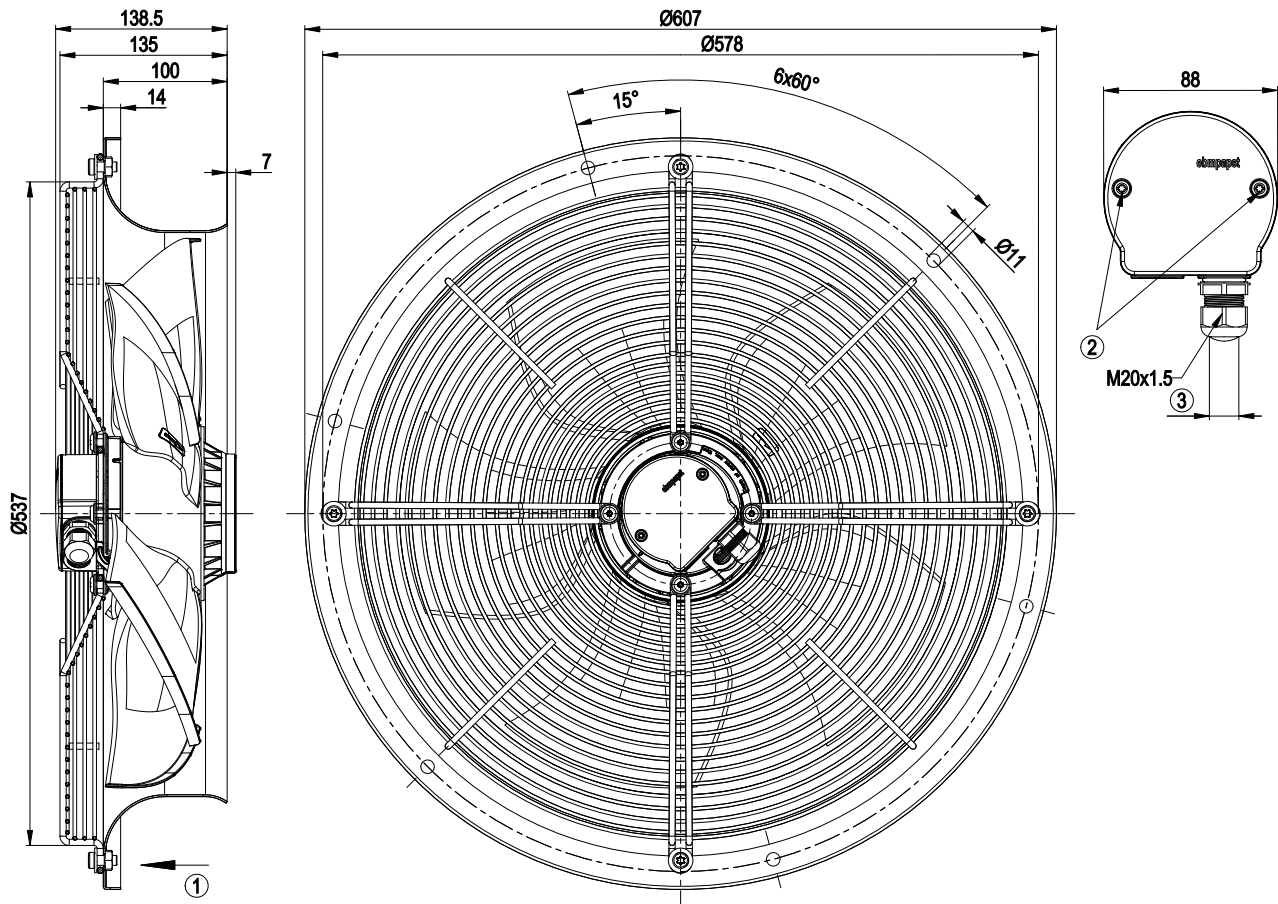


|   |                                                                          |
|---|--------------------------------------------------------------------------|
| 1 | Direction of air flow "V"                                                |
| 2 | Tightening torque $1.0 \pm 0.15$ Nm                                      |
| 3 | Cable diameter: min. 6 mm, max. 12 mm, tightening torque: $2 \pm 0.3$ Nm |



AC axial fan - HyBlade®

sickled blades (S series)  
with full round nozzle


Connection screen

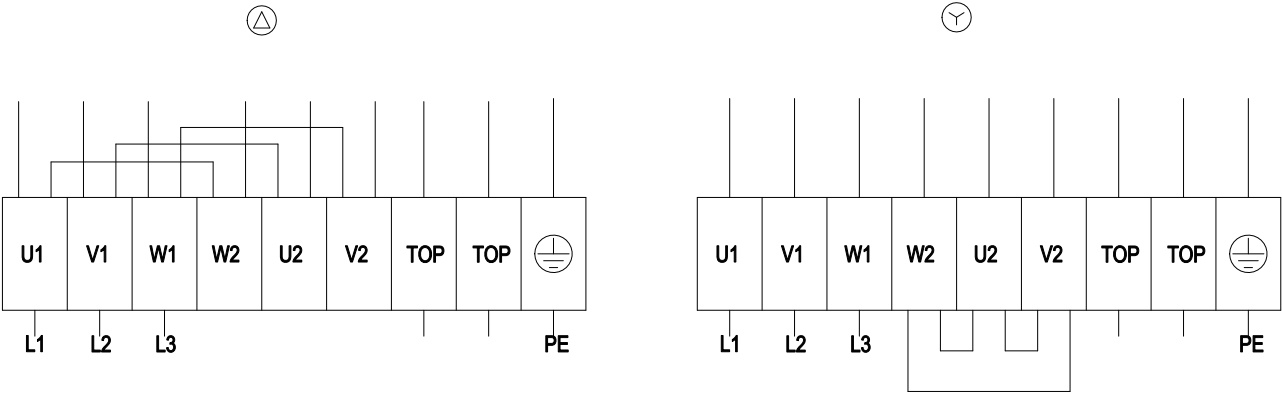

|    |                  |    |                 |     |              |
|----|------------------|----|-----------------|-----|--------------|
| Δ  | Delta-connection | Y  | Star connection | L1  | = U1 = black |
| L2 | = V1 = blue      | L3 | = W1 = brown    | W2  | yellow       |
| U2 | green            | V2 | white           | TOP | 2 x grey     |
| PE | green / yellow   |    |                 |     |              |



Charts: Air flow 50 Hz Δ

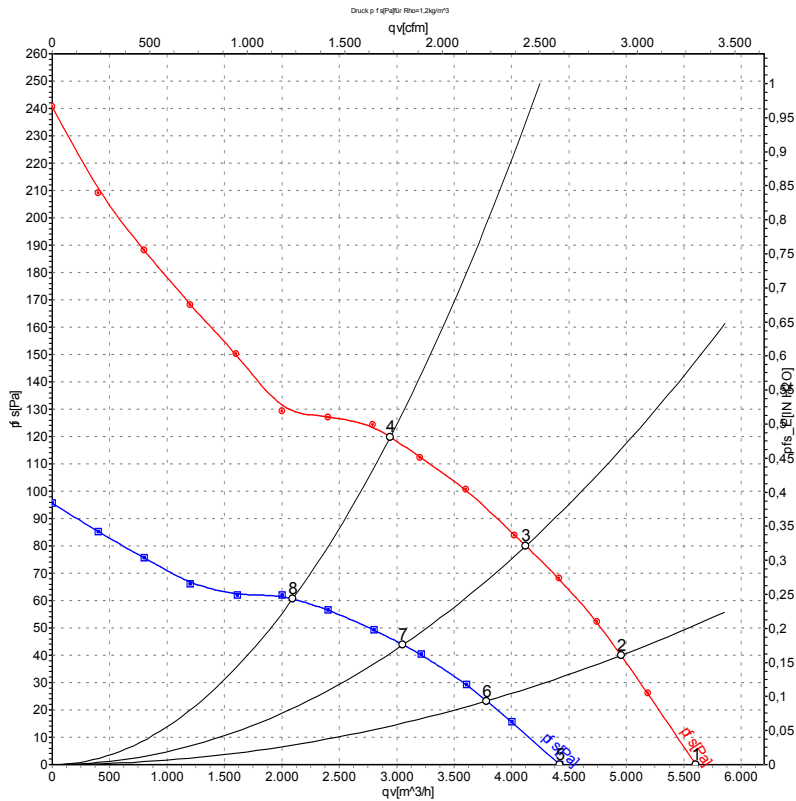

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: L<sub>wA</sub> measured as per ISO 13347 /  
L<sub>pA</sub> measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.


Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | L <sub>wA<sub>in</sub></sub> | qv   | p <sub>ts</sub> |
|---|-------|-----|----|-------------------|----------------|------|------------------------------|------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)                        | m³/h | Pa              |
| 1 | Δ     | 400 | 50 | 1350              | 231            | 0.49 | 73                           | 5605 | 0               |
| 2 | Δ     | 400 | 50 | 1320              | 262            | 0.52 | 74                           | 4955 | 40              |
| 3 | Δ     | 400 | 50 | 1300              | 289            | 0.55 | 72                           | 4125 | 80              |
| 4 | Δ     | 400 | 50 | 1250              | 340            | 0.61 | 72                           | 2945 | 120             |
| 5 | Y     | 400 | 50 | 1070              | 160            | 0.27 | 67                           | 4420 | 0               |
| 6 | Y     | 400 | 50 | 1015              | 172            | 0.29 | 66                           | 3785 | 23              |
| 7 | Y     | 400 | 50 | 970               | 182            | 0.31 | 65                           | 3055 | 44              |
| 8 | Y     | 400 | 50 | 875               | 200            | 0.33 | 65                           | 2095 | 61              |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · L<sub>wA<sub>in</sub></sub> = Sound power level inlet side · qv = Air flow · p<sub>ts</sub> = Pressure increase



Charts: Air flow 60 Hz Δ

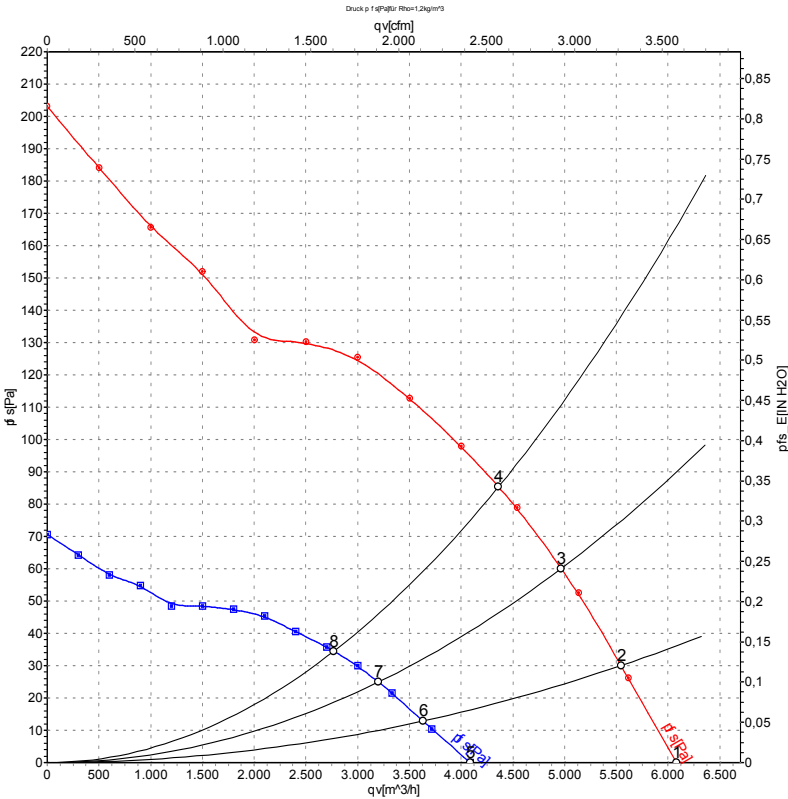

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: LwA measured as per ISO 13347 /  
LpA measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | LwA <sub>in</sub> | qv   | p <sub>ts</sub> |
|---|-------|-----|----|-------------------|----------------|------|-------------------|------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | m³/h | Pa              |
| 1 | Δ     | 400 | 60 | 1455              | 334            | 0.57 | 75                | 6085 | 0               |
| 2 | Δ     | 400 | 60 | 1415              | 359            | 0.61 | 75                | 5545 | 30              |
| 3 | Δ     | 400 | 60 | 1380              | 381            | 0.64 | 75                | 4965 | 60              |
| 4 | Δ     | 400 | 60 | 1360              | 415            | 0.70 | 73                | 4360 | 85              |
| 5 | Y     | 400 | 60 | 990               | 187            | 0.31 | 67                | 4090 | 0               |
| 6 | Y     | 400 | 60 | 940               | 192            | 0.32 | 67                | 3630 | 13              |
| 7 | Y     | 400 | 60 | 900               | 197            | 0.33 | 65                | 3200 | 25              |
| 8 | Y     | 400 | 60 | 860               | 205            | 0.35 | 63                | 2770 | 35              |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · LwA<sub>in</sub> = Sound power level inlet side · qv = Air flow · p<sub>ts</sub> = Pressure increase

