

W4D500-DY14-15 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



Nominal data

Type	W4D500-DY14-15		
Motor	M4D094-HA		
Phase		3~	3~
Nominal voltage	VAC	400	400
Connection		Δ	Y
Frequency	Hz	50	50
Type of data definition		ml	ml
Valid for approval / standard		CE	CE
Speed	min ⁻¹	1295	900
Power input	W	730	450
Current draw	A	1.35	0.8
Max. back pressure	Pa	170	85
Max. ambient temperature	°C	55	55
Starting current	A	3.9	1.3

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

Installation category	A	Overall efficiency η_{es}	32.4	28.3	32.3
Efficiency category	Static	Efficiency grade N	40.1	36	40
Variable speed drive	No	Power input P_e	kW	0.61	
Specific ratio*	1.00	Air flow q_v	m³/h	6005	
		Pressure increase p_{fs}	Pa	120	
		Speed n	min⁻¹	1335	

* Specific ratio = $1 + p_B / 100\,000\text{ Pa}$

Data established at point of optimum efficiency

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$ 

AC axial fan

sickled blades (S series)

with full square nozzle

Technical features

Mass	15.5 kg
Size	500 mm
Surface of rotor	Partially cast in aluminium
Material of terminal box	ABS Plastic, black
Material of blades	Aluminium sheet
Material of wall ring	Sheet steel, pre-galvanised and coated with black plastic
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	5
Blade angle	5°
Direction of air flow	"A"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2004); CE




AC axial fan

sickled blades (S series)

with full square nozzle

Product drawing

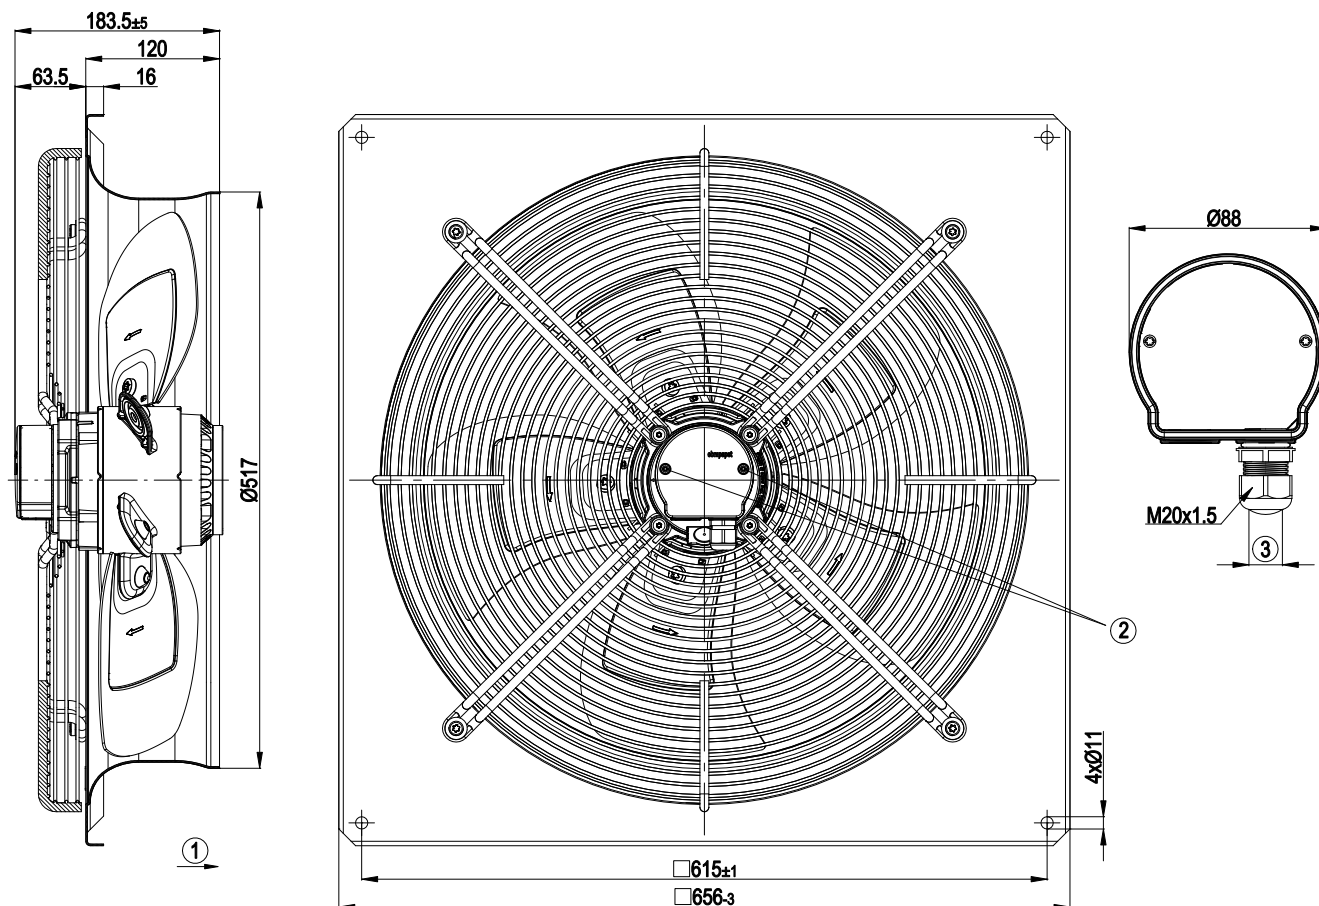


1	Direction of air flow "A"
2	Tightening torque 1.0 ± 0.15 Nm
3	Cable diameter: min. 6 mm, max. 12 mm; tightening torque: 2 ± 0.15 Nm

AC axial fan

sickled blades (S series)
with full square nozzle

Connection screen

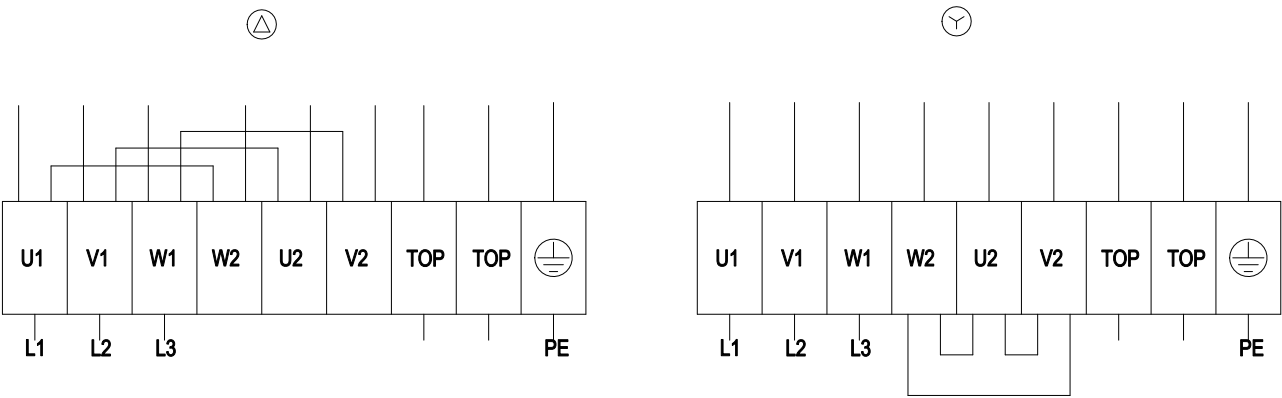


Δ	Delta-connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green / yellow				



AC axial fan

sickled blades (S series)
with full square nozzle

Charts: Air flow 50 Hz Δ

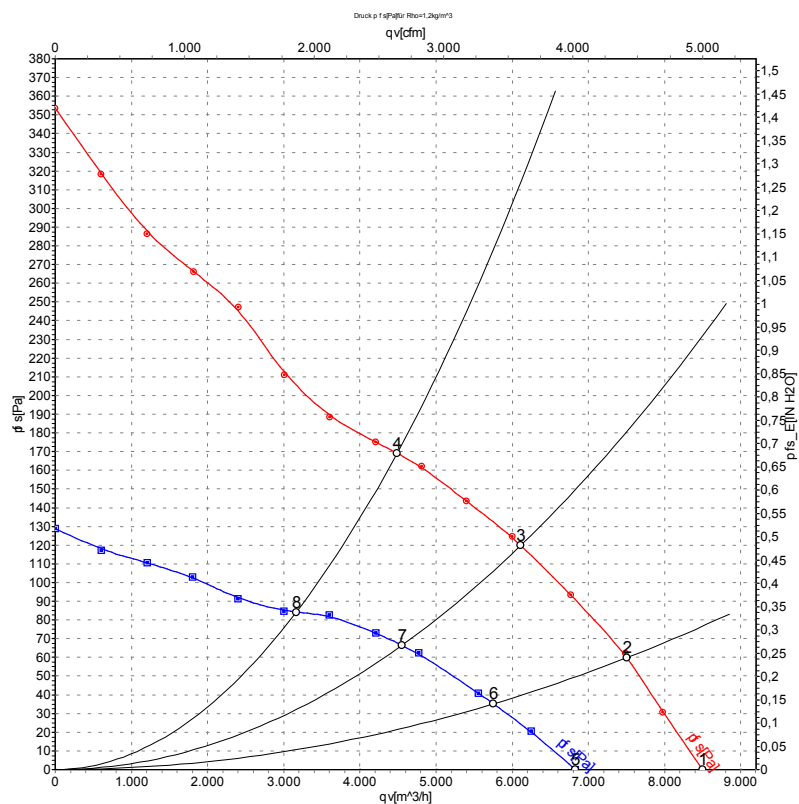

Measurement: LU-70417
Measurement: LU-70419

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa
1	Δ	400	50	1380	490	1.04	8495	0
2	Δ	400	50	1360	557	1.12	7500	60
3	Δ	400	50	1340	612	1.19	6110	120
4	Δ	400	50	1295	730	1.35	4485	170
5	Y	400	50	1110	360	0.61	6830	0
6	Y	400	50	1050	393	0.67	5755	35
7	Y	400	50	995	417	0.71	4550	66
8	Y	400	50	900	450	0.80	3165	85

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

