

AC axial fan

sickled blades (S series), single inlet
Wall ring with guard grille

W4E250-DI36-72 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W4E250-DI36-72			
Motor	M4E068-BF			
Phase		1~	1~	1~
Nominal voltage	VAC	115	115	115
Frequency	Hz	50	60	60
Type of data definition		fa	fa	fa
Valid for approval / standard		CE	CE	UL 2111
Speed	min ⁻¹	1390	1630	1630
Power input	W	42	44	47
Current draw	A	0.39	0.39	0.41
Motor capacitor	µF	6.0	6.0	6.0
Capacitor voltage	VDB	220	220	220
Max. ambient temperature	°C	45	70	70

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



AC axial fan

sickled blades (S series), single inlet

Wall ring with guard grille

Technical features


Mass	3.3 kg
Size	250 mm
Surface of rotor	Coated in black
Material of blades	Steel plate
Material of wall ring	Sheet steel, galvanised
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	9
Direction of air flow	"A"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position
Insulation class	"B"
Humidity class	F0
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	UL 2111; CSA C22.2 Nr.77



AC axial fan


sickled blades (S series), single inlet
Wall ring with guard grille

Product drawing

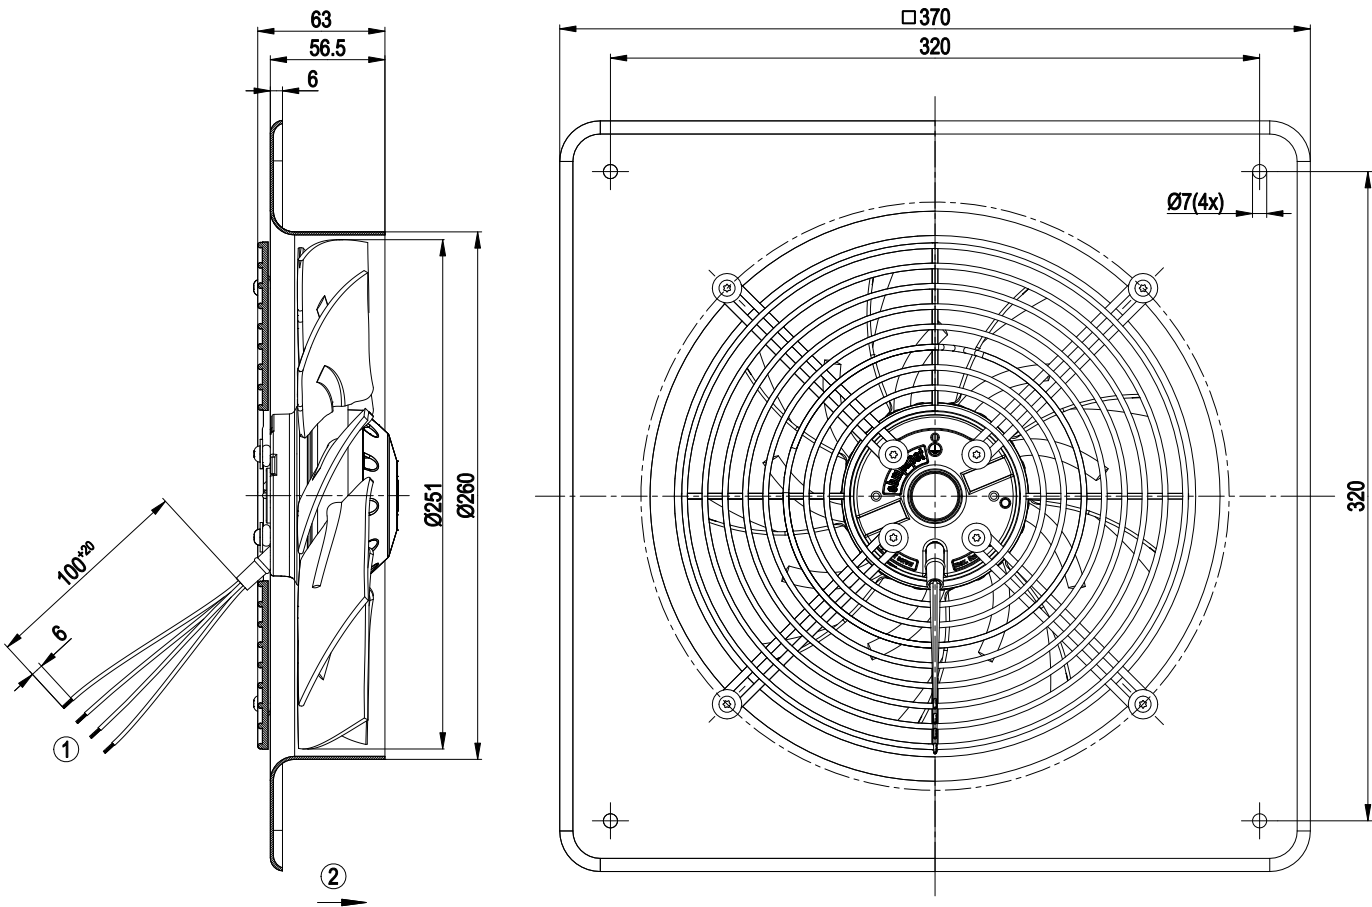

- | | |
|---|---|
| 1 | Connection line PVC AWG20, 4x brass lead tips crimped |
| 2 | Direction of air flow "A" |

Connection screen




U1	blue	Z	brown	U2	black
PE	green/yellow				



AC axial fan
sickled blades (S series), single inlet
Wall ring with guard grille

Charts: Air flow 50 Hz

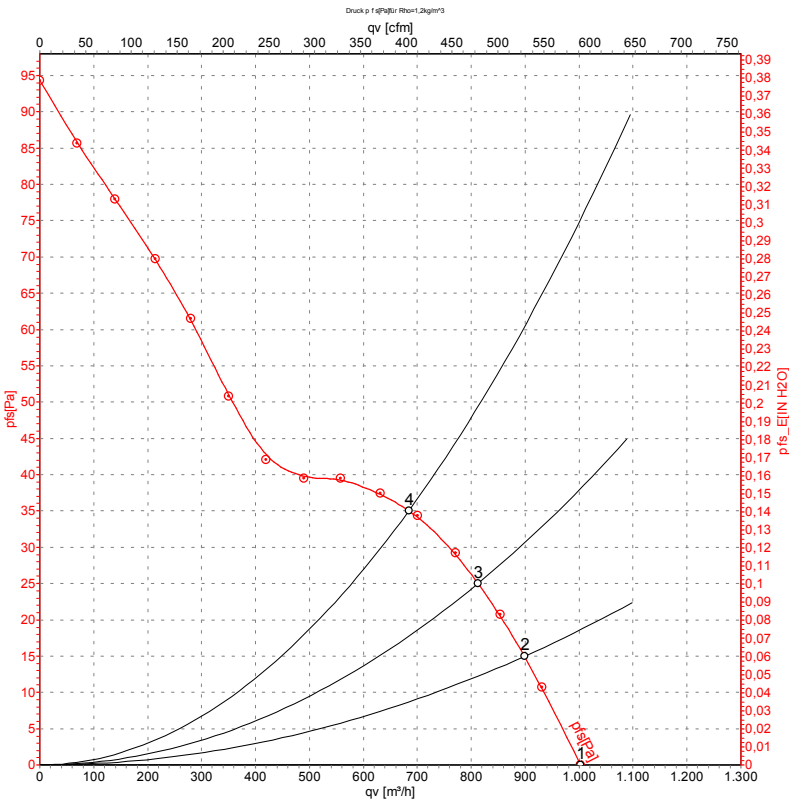

Measurement: LU-114506

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values


	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	115	50	1390	42	0.39	1005	0
2	115	50	1375	42	0.39	900	15
3	115	50	1365	43	0.39	810	25
4	115	50	1355	44	0.39	685	35

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC axial fan
sickled blades (S series), single inlet
Wall ring with guard grille

Charts: Air flow 60 Hz

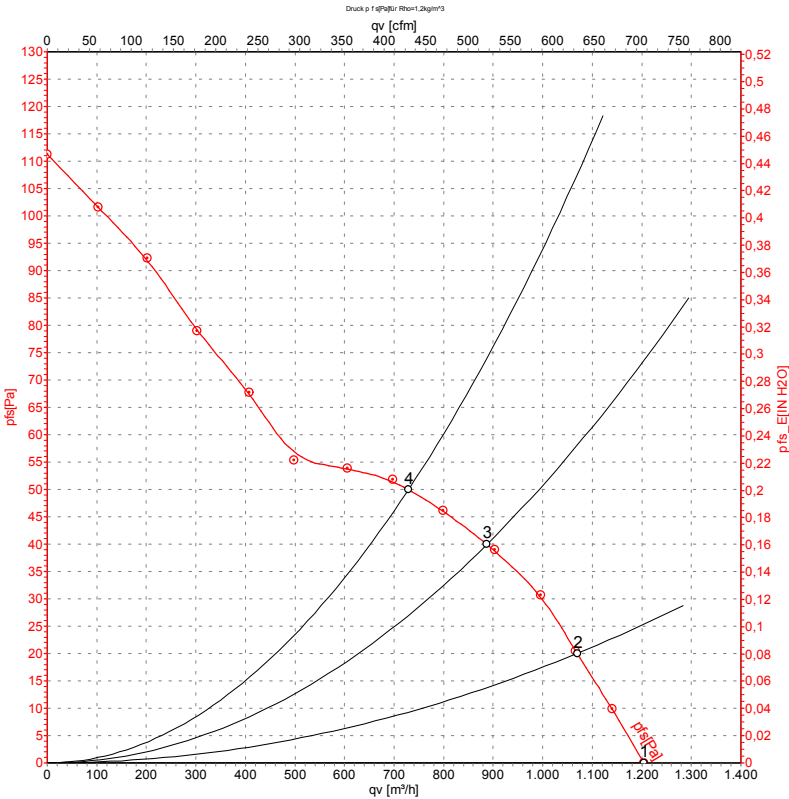

Measurement: LU-114503

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	115	60	1630	44	0.39	1205	0
2	115	60	1610	46	0.40	1070	20
3	115	60	1575	48	0.42	885	40
4	115	60	1560	49	0.42	730	50

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

