

AC axial fan

sickled blades (S series)
Wall ring with guard grille

W4E315-CP32-37 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W4E315-CP32-37		
Motor	M4E068-DF		
Phase		1~	1~
Nominal voltage	VAC	208	208
Frequency	Hz	60	60
Type of data definition		fa	fa
Valid for approval / standard		UL	CE
Speed (rpm)	min ⁻¹	1640	1640
Power input	W	115	115
Current draw	A	0.56	0.56
Motor capacitor	µF	5	5
Capacitor voltage	VDB	400	400
Capacitor standard		UL	P0 (CE)
Max. ambient temperature	°C	40	40

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC axial fan

sickled blades (S series)

Wall ring with guard grille

Technical features


Mass	4.66 kg
Size	315 mm
Surface of rotor	Coated in black
Material of blades	Sheet steel, coated in black
Material of wall ring	Sheet steel, pre-galvanised and coated in black plastic
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"B"
Humidity (F)/environmental protection class (H)	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	CSA C22.2 No.77; UL 2111



AC axial fan


sickled blades (S series)
Wall ring with guard grille

Product drawing

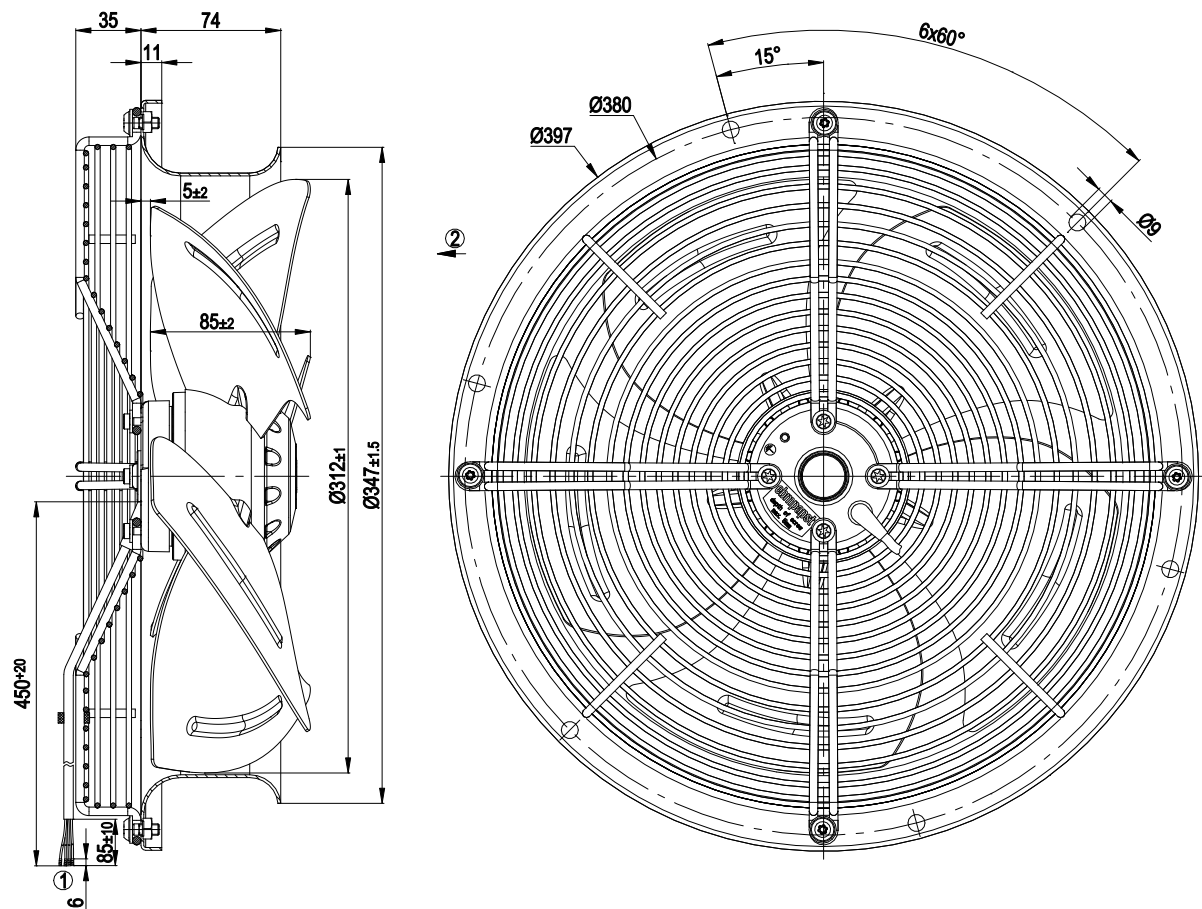

- | | |
|---|--|
| 1 | Connection line PVC AWG20, 4 x brass lead tips crimped |
| 2 | Direction of air flow "V" |

Connection screen

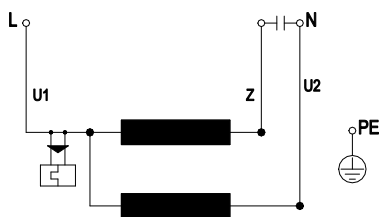


U1	blue	Z	brown	U2	black
PE	green/yellow				



AC axial fan

sickled blades (S series)
Wall ring with guard grille

Charts: Air flow 60 Hz

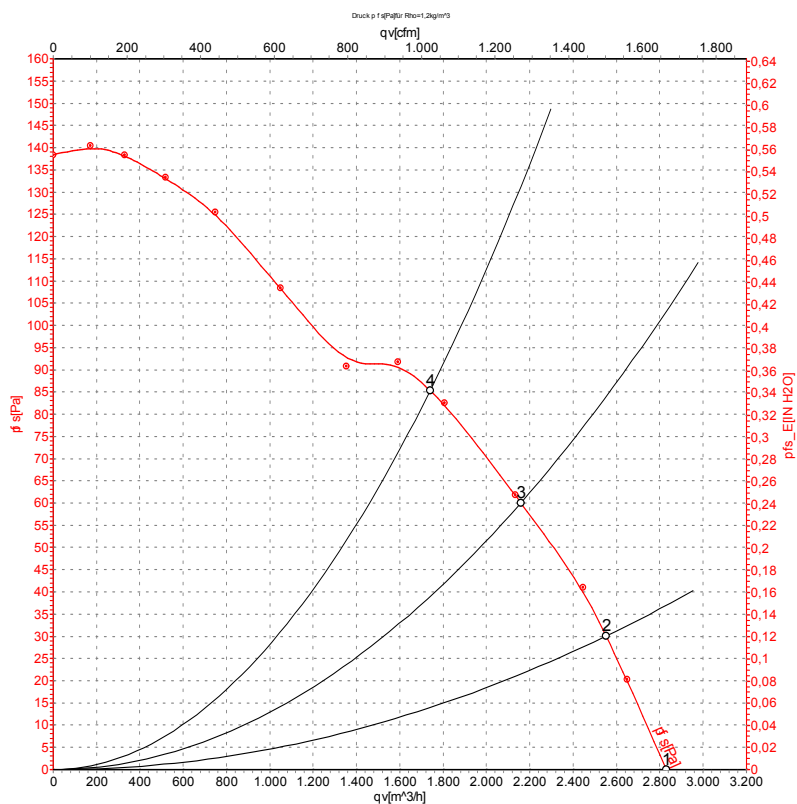

Measurement: LU-38938-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	208	60	1640	115	0.56	2830	0	1665	0.00
2	208	60	1620	125	0.60	2555	30	1505	0.12
3	208	60	1585	137	0.66	2160	60	1270	0.24
4	208	60	1550	148	0.71	1740	85	1025	0.34

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

