

AC axial fan

sickled blades (S series)

with full round nozzle

W4E420-CU05-37 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W4E420-CU05-37	
Motor	M4E094-EA	
Phase		1~
Nominal voltage	VAC	115
Frequency	Hz	60
Type of data definition		ml
Valid for approval / standard		CE
Speed	min ⁻¹	1480
Power input	W	380
Current draw	A	3.31
Motor capacitor	μF	30
Capacitor voltage	VDB	220
Max. ambient temperature	°C	70

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



AC axial fan

sickled blades (S series)

with full round nozzle

Technical features


Mass	8.7 kg
Size	420 mm
Surface of rotor	Coated in black
Material of impeller	Plastic PA66, fibreglass-reinforced
Material of wall ring	Sheet steel, pre-galvanised and coated in black plastic
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Product conforming to standard	CE
Approval	UL 1004-1; CSA C22.2 Nr.100



AC axial fan


sickled blades (S series)
with full round nozzle

Product drawing

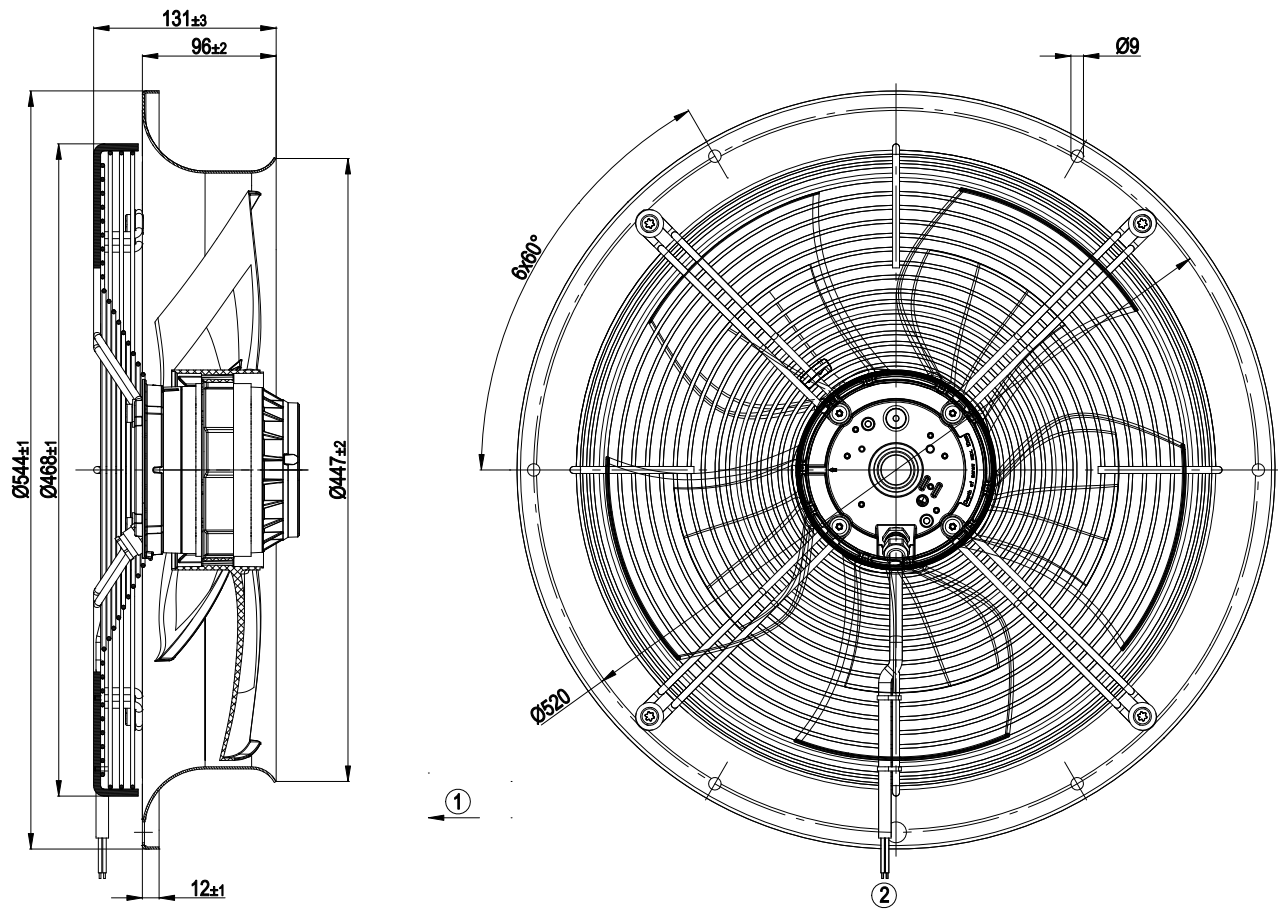

1	Direction of air flow "V"
2	Connection line FEP AWG20

Connection screen

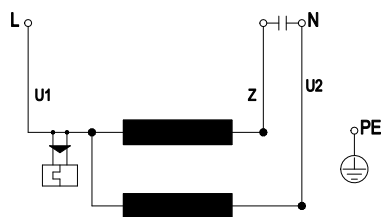


U1	blue	Z	brown	U2	black
PE	green/yellow				



AC axial fan
sickled blades (S series)
with full round nozzle

Charts: Air flow 60 Hz

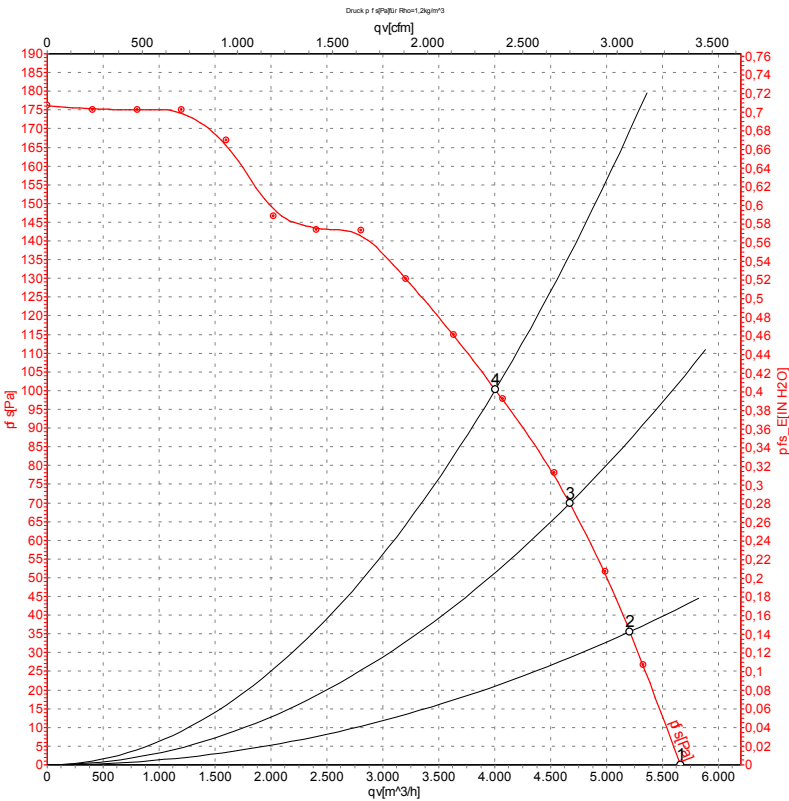

Measurement: LU-69165

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	115	60	1615	334	2.93	5660	0
2	115	60	1585	355	3.10	5205	36
3	115	60	1560	371	3.24	4670	70
4	115	60	1530	380	3.31	4005	100

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

