

W6D500-KJ05-11 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W6D500-KJ05-11		
Motor	M6D110-EF		
Phase		3~	3~
Nominal voltage	VAC	400	480
Connection		Δ	Δ
Frequency	Hz	50	60
Type of data definition		ml	ml
Valid for approval / standard		CE	CE
Speed (rpm)	min ⁻¹	920	1090
Power input	W	260	410
Current draw	A	0.63	0.72
Max. back pressure	Pa	80	110
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	40	40
Starting current	A	2.2	2.4

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011

		Actual	Request 2015
01 Overall efficiency η_{es}	%	33.9	29.9
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		44	40
05 Variable speed drive		No	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_e	kW	0.25
09 Air flow q_v	m ³ /h	4010
09 Pressure increase p_{fs}	Pa	78
10 Speed (rpm) n	min ⁻¹	925
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-177627



Technical features

Mass	14 kg
Size	500 mm
Surface of rotor	Coated in black
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of wall ring	PP plastic
Streamer material	PP plastic
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	H2
Note ambient temperature	If there is a risk of ice formation, the fan is only to be operated with heating tape in the wall ring. Contact ebm-papst for more details.
Max. permissible ambient motor temp. (transp./ storage)	+70 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing with anti-freezing grease
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2010); EN 61800-5-1; CE
Approval	VDE; EAC


Product drawing

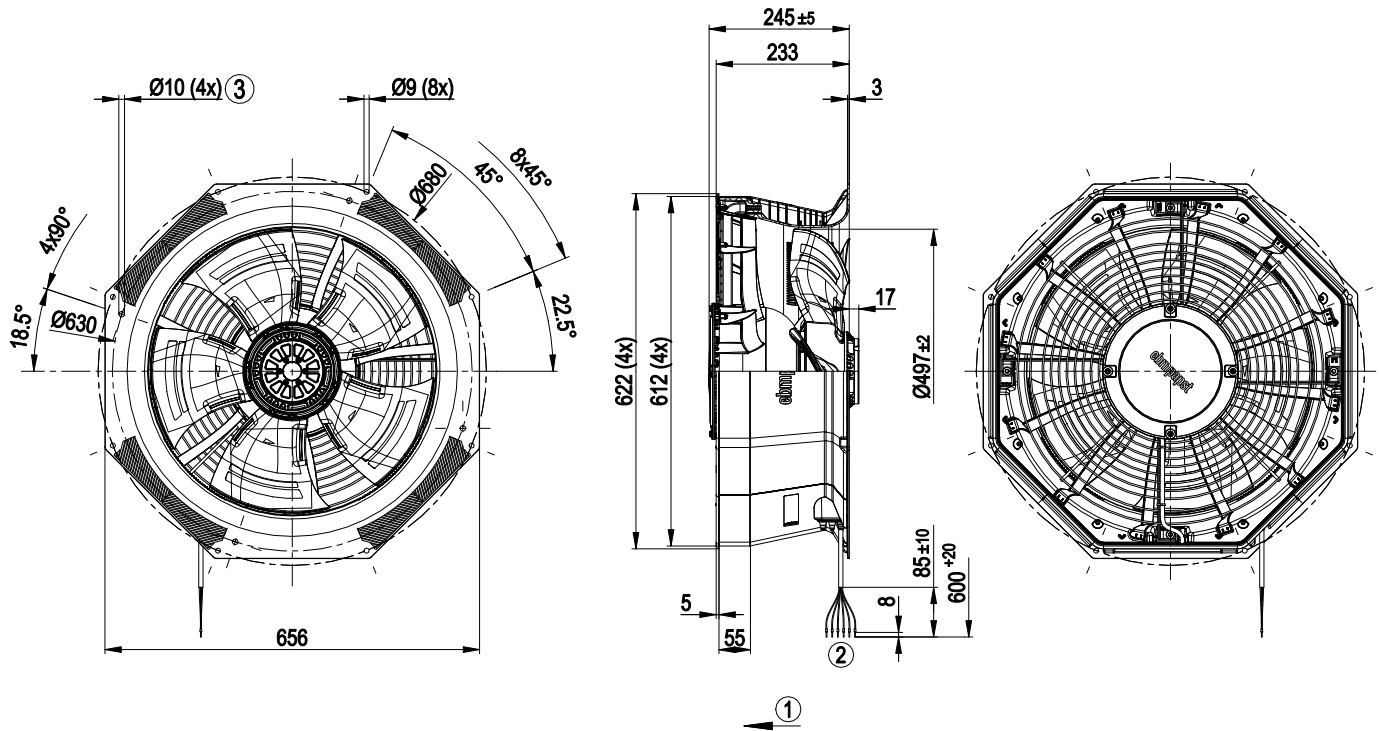

Pay attention to installation position! The struts of the guard grille must be in X-position. See Section on Connection and Start-up in the operating instructions.

- | | |
|---|---|
| 1 | Direction of air flow "V" |
| 2 | Connection line silicone 6G 0.5 mm ² , 6x crimped core-end sleeves |
| 3 | Mounting holes for FlowGrid |

Connection screen

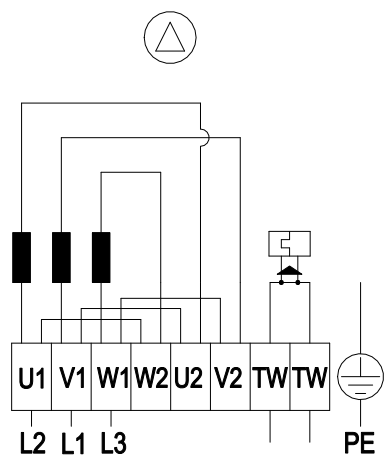


Three-phase motor equipped with TOP
Change in direction of rotation by reversing two phases

Δ	Delta connection
L1	blue
L2	black
L3	brown
TW	Thermal overload protector grey (2x)
PE	green/yellow



Charts: Air flow 50 Hz

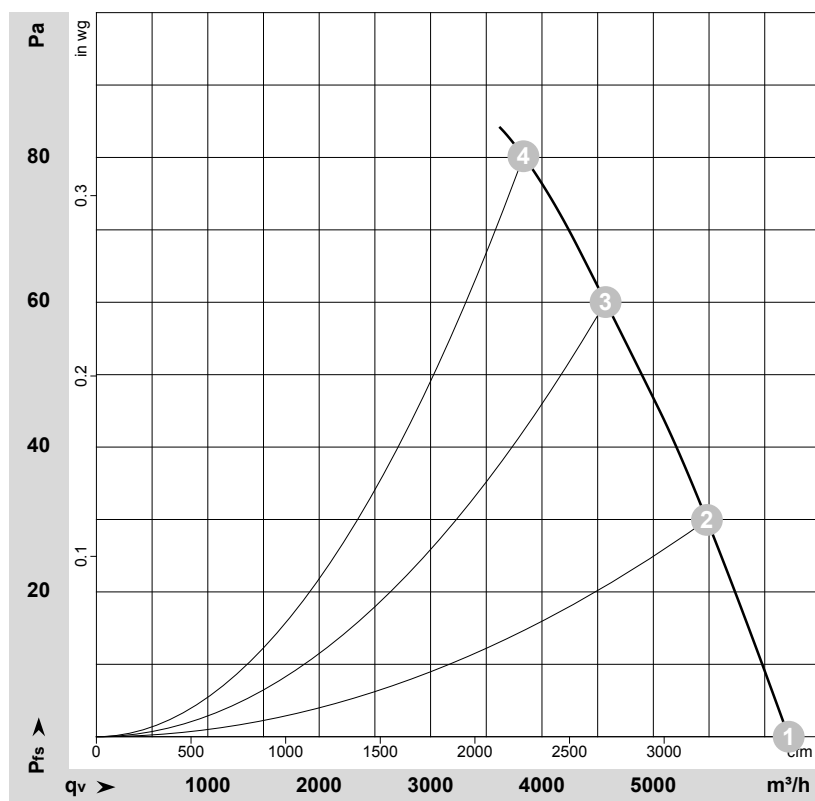

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-177627-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values


	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Δ	400	50	945	198	0.63	62	69	70	6215	0	3660	0.00
2	Δ	400	50	940	222	0.64	60	68	69	5480	30	3225	0.12
3	Δ	400	50	930	242	0.65	58	65	67	4570	60	2690	0.24
4	Δ	400	50	920	260	0.63	58	66	67	3835	80	2255	0.32

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase



AC axial fan - AxiCool
sickled blades (S series)

Charts: Air flow 60 Hz

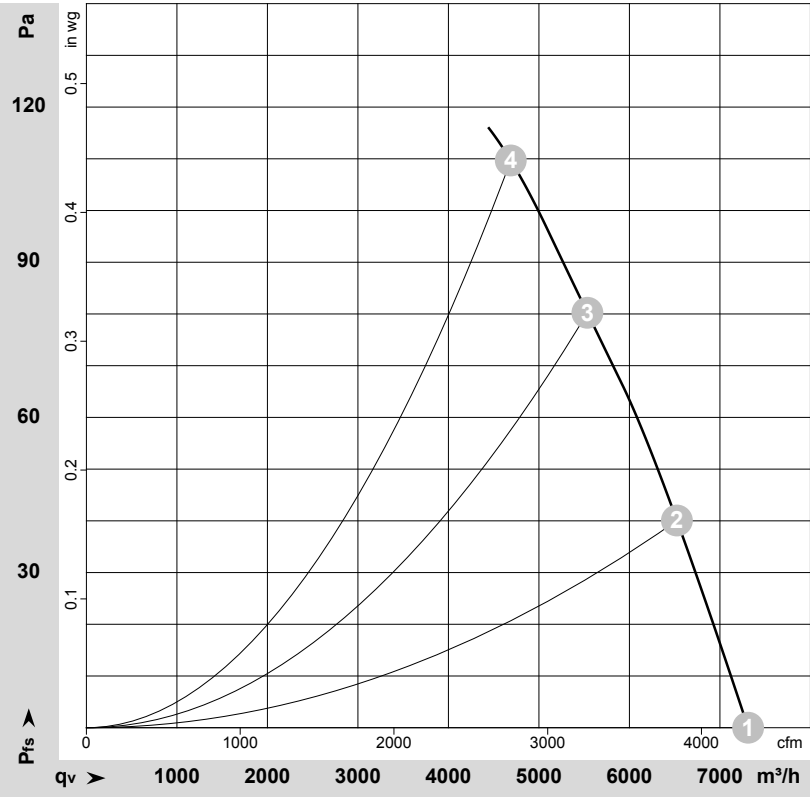

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-177968-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Δ	480	60	1125	306	0.68	66	74	75	7310	0	4305	0.00
2	Δ	480	60	1110	344	0.71	64	72	73	6525	40	3840	0.16
3	Δ	480	60	1100	377	0.73	61	70	71	5535	80	3260	0.32
4	Δ	480	60	1090	410	0.72	62	71	72	4690	110	2760	0.44

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

