

# AC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, Transformer fan

W6D630-CN09-81 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142



## Nominal data

Type	W6D630-CN09-81				
Motor	M6D110-GF				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	277	400	480
Wiring		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Method of obtaining data		fa	fa	fa	fa
Valid for approval/standard		CE	CE	CE	CE
Speed (rpm)	min <sup>-1</sup>	930	1090	930	1090
Power consumption	W	480	790	480	790
Current draw	A	2.17	2.51	1.25	1.45
Max. back pressure	Pa	110	80	110	80
Max. back pressure	inH <sub>2</sub> O	0.44	0.32	0.44	0.32
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	60	40	60	40
Starting current	A	7.2		4.3	

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to ErP Directive

		Actual	Req. 2015		
01 Overall efficiency $\eta_{es}$	%	32.4	32.4	09 Power consumption $P_e$	kW
02 Measurement category	A			09 Air flow $q_v$	m <sup>3</sup> /h
03 Efficiency category	Static			09 Pressure increase $p_{fs}$	Pa
04 Efficiency grade N	40	40		10 Speed (rpm) n	min <sup>-1</sup>
05 Variable speed drive	No			11 Specific ratio*	1.00

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-110377



# AC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, Transformer fan

## Technical description


<b>Weight</b>	29.8 kg
<b>Fan size</b>	630 mm
<b>Rotor surface</b>	Painted black
<b>Terminal box material</b>	Die-cast aluminum, painted black
<b>Blade material</b>	Press-fitted, painted sheet steel blank, sprayed with PP plastic
<b>Fan housing material</b>	Sheet steel, galvanized and coated with white aluminum plastic (RAL 9006)
<b>Guard grille material</b>	Steel, coated with white-aluminum plastic (RAL 9006)
<b>Number of blades</b>	5
<b>Airflow direction</b>	"A"
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP54
<b>Insulation class</b>	"F"
<b>Moisture (F) / Environmental (H) protection class</b>	F4-2
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+ 80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	- 40 °C
<b>Installation position</b>	Shaft horizontal or rotor on top; rotor on bottom on request
<b>Condensation drainage holes</b>	On stator side
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical hookup</b>	Via terminal box
<b>Motor protection</b>	Thermal overload protector (TOP) with basic insulation
<b>Protection class</b>	I (with customer connection of protective earth)
<b>Conformity with standards</b>	EN 61800-5-1; CE
<b>Approval</b>	UL 1004-1; VDE; CSA C22.2 No. 100



# AC axial fan - HyBlade

sickle-shaped blades (S series)  
with round full nozzle, Transformer fan

## Product drawing

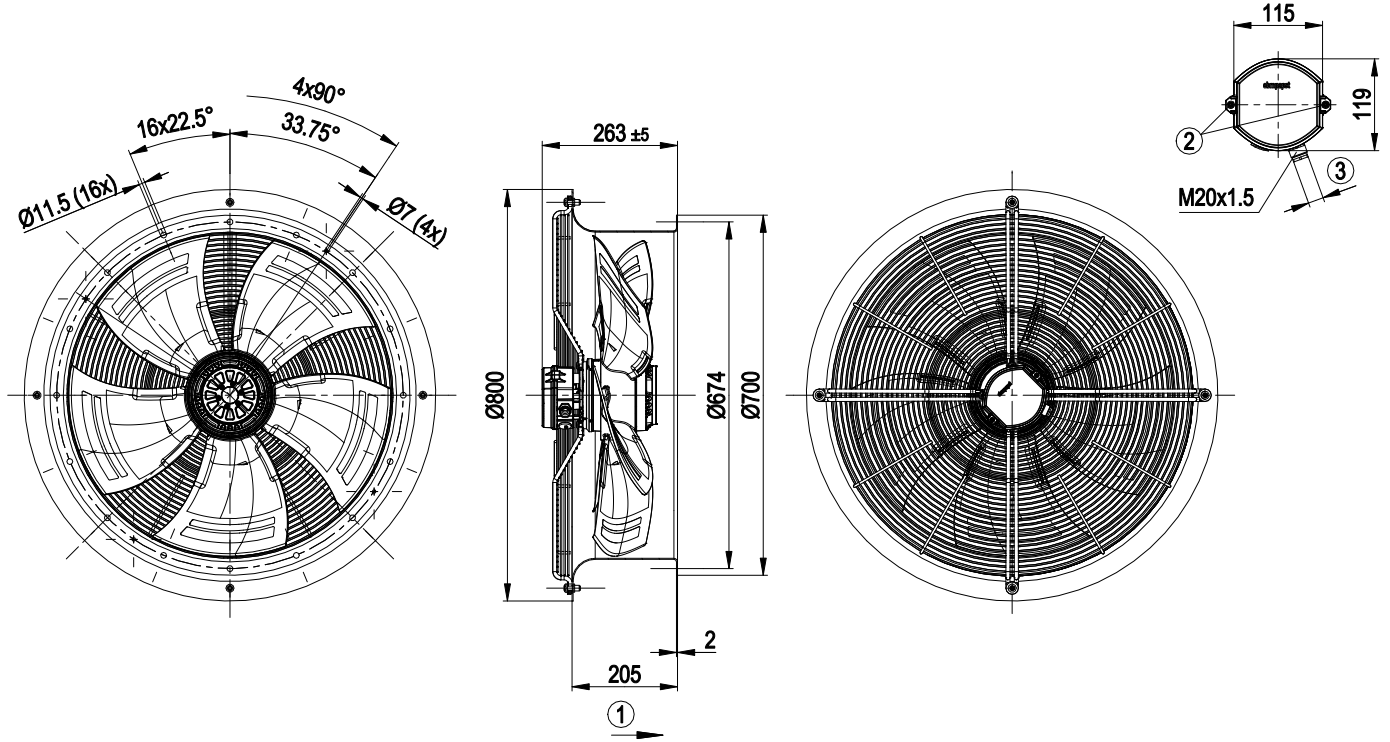

1	Direction of air flow "A"
2	Tightening torque 2.5 ± 0.4 Nm
3	Cable diameter min. 10 mm, max. 12 mm, tightening torque 2±0.3 Nm




# AC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, Transformer fan

## Connection diagram

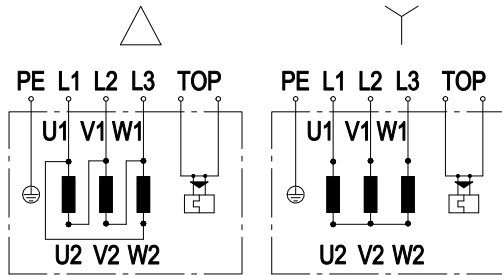

Note: Change of rotation direction by reversing two phases

Δ	Delta connection	Y	Star connection	L1	black
L2	blue	L3	brown	U1	black
V1	blue	W1	brown	U2	green
V2	white	W2	yellow	TOP	2x gray
PE	green/yellow				




# AC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, Transformer fan

## Curves: Air performance 50 Hz

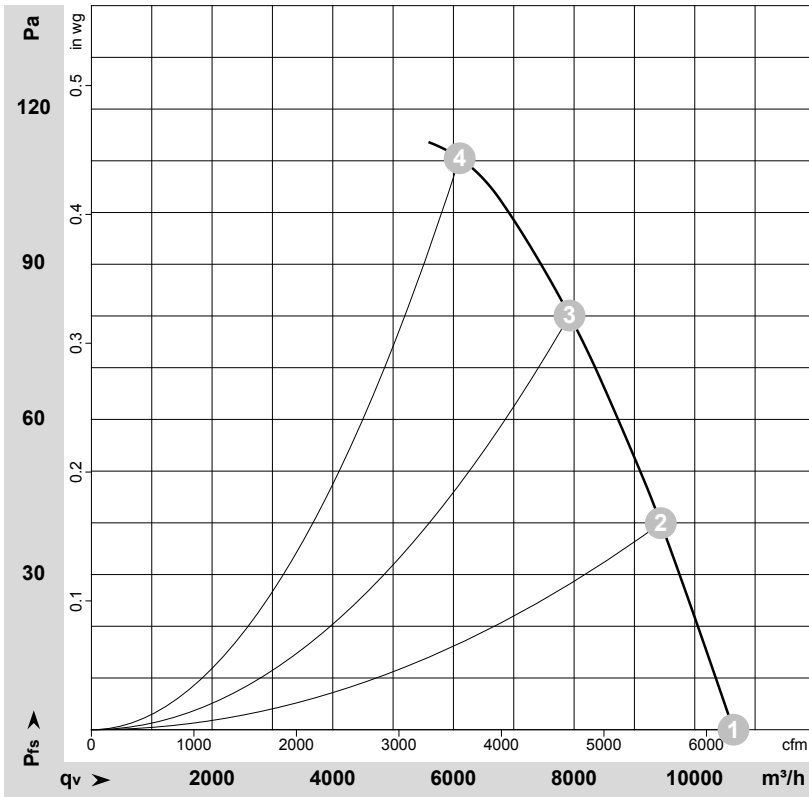

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-157132-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	$P_e$	I	$LpA_{in}$	$LwA_{in}$	$LwA_{out}$	qv	$p_{fs}$	qv	$p_{fs}$
		V	Hz	$\text{min}^{-1}$	W	A	dB(A)	dB(A)	dB(A)	$\text{m}^3/\text{h}$	Pa	CFM	inH2O
1	Y	400	50	930	480	1.25	68	74	74	10645	0	6265	0.00
2	Y	400	50	920	536	1.29	66	72	72	9435	40	5555	0.16
3	Y	400	50	905	597	1.35	65	71	71	7925	80	4665	0.32
4	Y	400	50	900	623	1.36	66	72	72	6105	110	3595	0.44


Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) ·  $P_e$  = Power consumption · I = Current draw ·  $LpA_{in}$  = Sound pressure level intake side ·  $LwA_{in}$  = Sound power level intake side  
 $LwA_{out}$  = Sound power level outlet side · qv = Air flow ·  $p_{fs}$  = Pressure increase



# AC axial fan - HyBlade

sickle-shaped blades (S series)  
with round full nozzle, Transformer fan

## Curves: Air performance 60 Hz

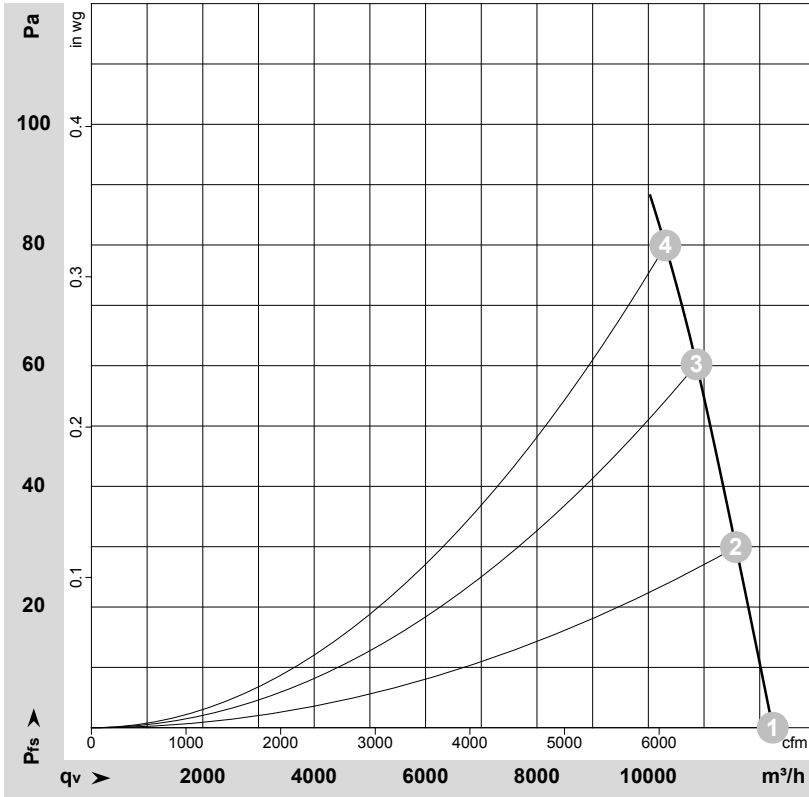

$\rho = 1.183 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-169988-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	qv	p <sub>fs</sub>	qv	p <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	CFM	inH <sub>2</sub> O
1	Y	480	60	1090	790	1.45	72	79	79	12235	0	7200	0.00
2	Y	480	60	1080	833	1.47	71	78	78	11575	30	6810	0.12
3	Y	480	60	1070	879	1.52	70	77	77	10865	60	6395	0.24
4	Y	480	60	1065	915	1.56	69	76	76	10305	80	6065	0.32

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · qv = Air flow · p<sub>fs</sub> = Pressure increase

