

AC axial fan - HyBlade

sickled blades (S series)
with full round nozzle, Transformator fan

W6D800-CD11-80 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W6D800-CD11-80		
Motor	M6D138-LA		
Phase		3~	3~
Nominal voltage	VAC	230	400
Connection		Δ	Y
Frequency	Hz	50	50
Type of data definition		fa	fa
Valid for approval / standard		CE	CE
Speed (rpm)	min ⁻¹	920	920
Power input	W	1420	1420
Current draw	A	5.5	3.2
Max. back pressure	Pa	130	130
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	65	65
Starting current	A	22	13

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Technical features

Mass	45 kg
Size	800 mm
Surface of rotor	Coated in black
Material of terminal box	Die-cast aluminium, coated in black
Material of blades	Aluminium sheet insert (coated in black), sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and plastic-coated in white aluminium (RAL 9006)
Material of guard grille	Steel, galvanised and plastic-coated in white aluminium (RAL 9006)
Number of blades	5
Blade angle	0°
Direction of air flow	"A"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 55
Insulation class	"F"
Humidity (F)/environmental protection class (H)	H2+
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensate discharge holes	On the stator side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2010); EN 61800-5-1
Approval	CSA C22.2 No.100; EAC; UL 1004-1




AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Product drawing

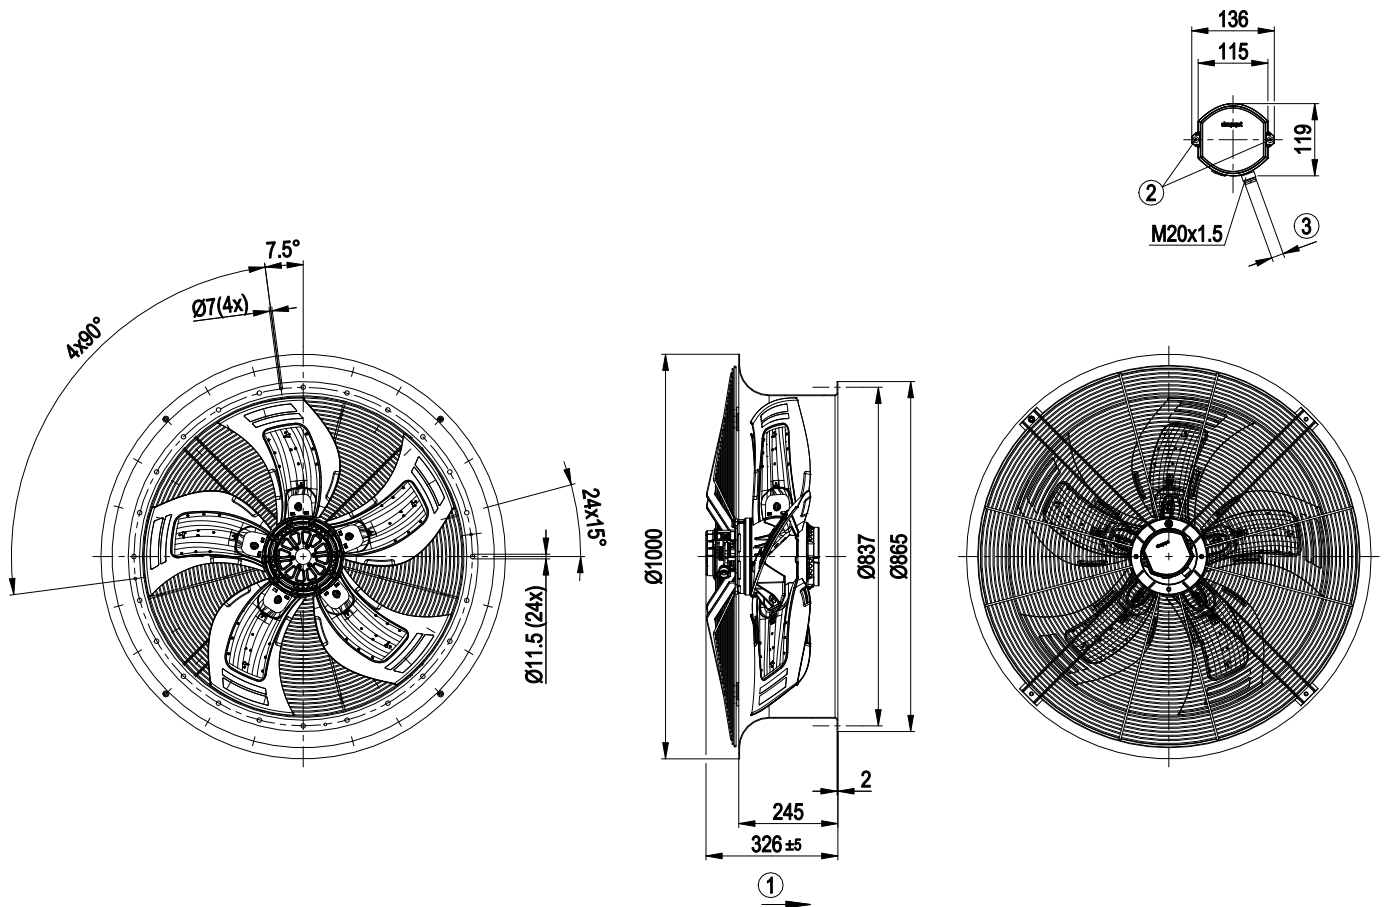


1	Direction of air flow "A"
2	Tightening torque 2.5±0.4 Nm
3	Cable diameter min. 10 mm, max. 12 mm, tightening torque 4±0.4 Nm

AC axial fan - HyBlade

sickled blades (S series)
with full round nozzle, Transformator fan

Connection screen

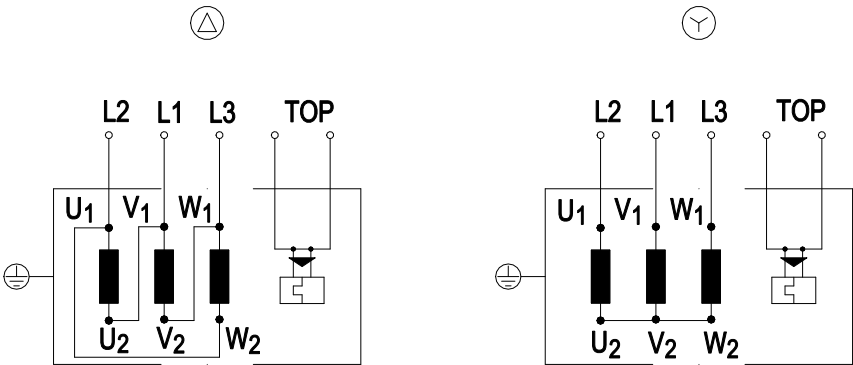

Change direction of rotation by reversing two phases

Δ	Delta connection	Y	Star connection	L2	= U1 = black
L1	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x grey
PE	green/yellow				




AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Charts: Air flow 50 Hz

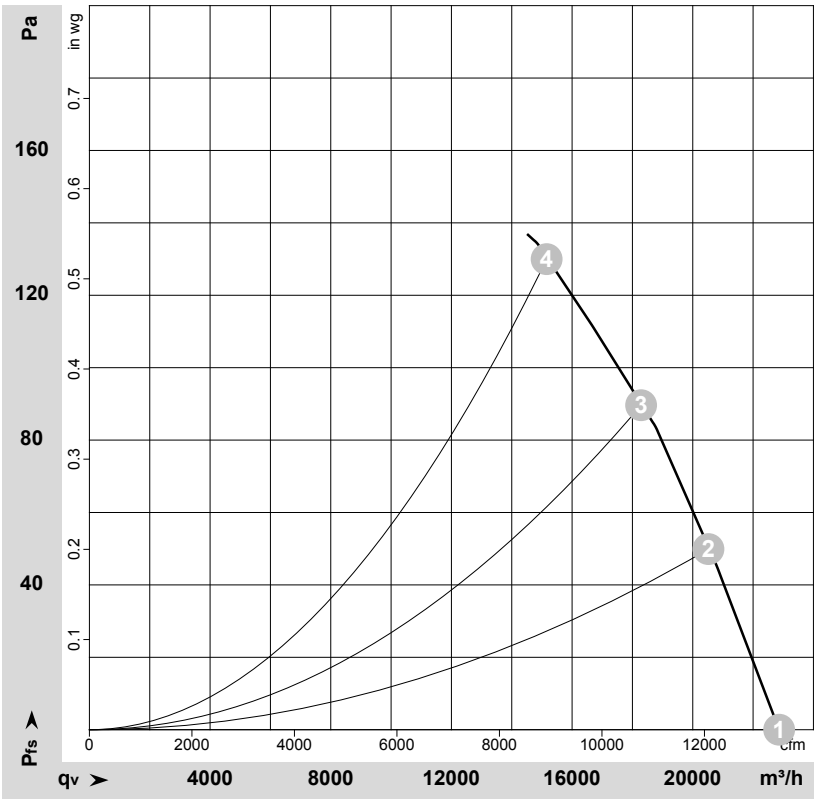

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-174208-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Y	400	50	920	1420	3.20	73	79	78	22865	0	13455	0.00
2	Y	400	50	910	1549	3.36	72	78	77	20520	50	12080	0.20
3	Y	400	50	905	1639	3.46	71	77	76	18290	90	10765	0.36
4	Y	400	50	895	1743	3.59	71	77	76	15155	130	8920	0.52

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

