

AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

W6D800-GA01-47 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W6D800-GA01-47		
Motor	M6D138-NA		
Phase		3~	3~
Nominal voltage	VAC	400	400
Connection		Δ	Y
Frequency	Hz	50	50
Type of data definition		ml	ml
Valid for approval / standard		CE	CE
Speed (rpm)	min ⁻¹	915	750
Power input	W	2090	1490
Current draw	A	4.6	2.72
Max. back pressure	Pa	175	115
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	65	65
Starting current	A	18	6

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	35.4	35.4
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		40	40
05 Variable speed drive		No	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_e	kW	1.85
09 Air flow q_v	m ³ /h	17830
09 Pressure increase p_{fs}	Pa	130
10 Speed (rpm) n	min ⁻¹	930
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-124239



AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Technical features

Mass	46.8 kg
Size	800 mm
Surface of rotor	Cast in aluminium
Material of terminal box	PP plastic
Material of blades	Aluminium sheet insert, sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, galvanised and plastic-coated in telegrey (RAL 7047)
Number of blades	5
Blade angle	0°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 55
Insulation class	"F"
Humidity (F)/environmental protection class (H)	H2+
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensate discharge holes	On rotor and stator sides
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2010); EN 61800-5-1; CE
Approval	VDE; EAC




AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Product drawing

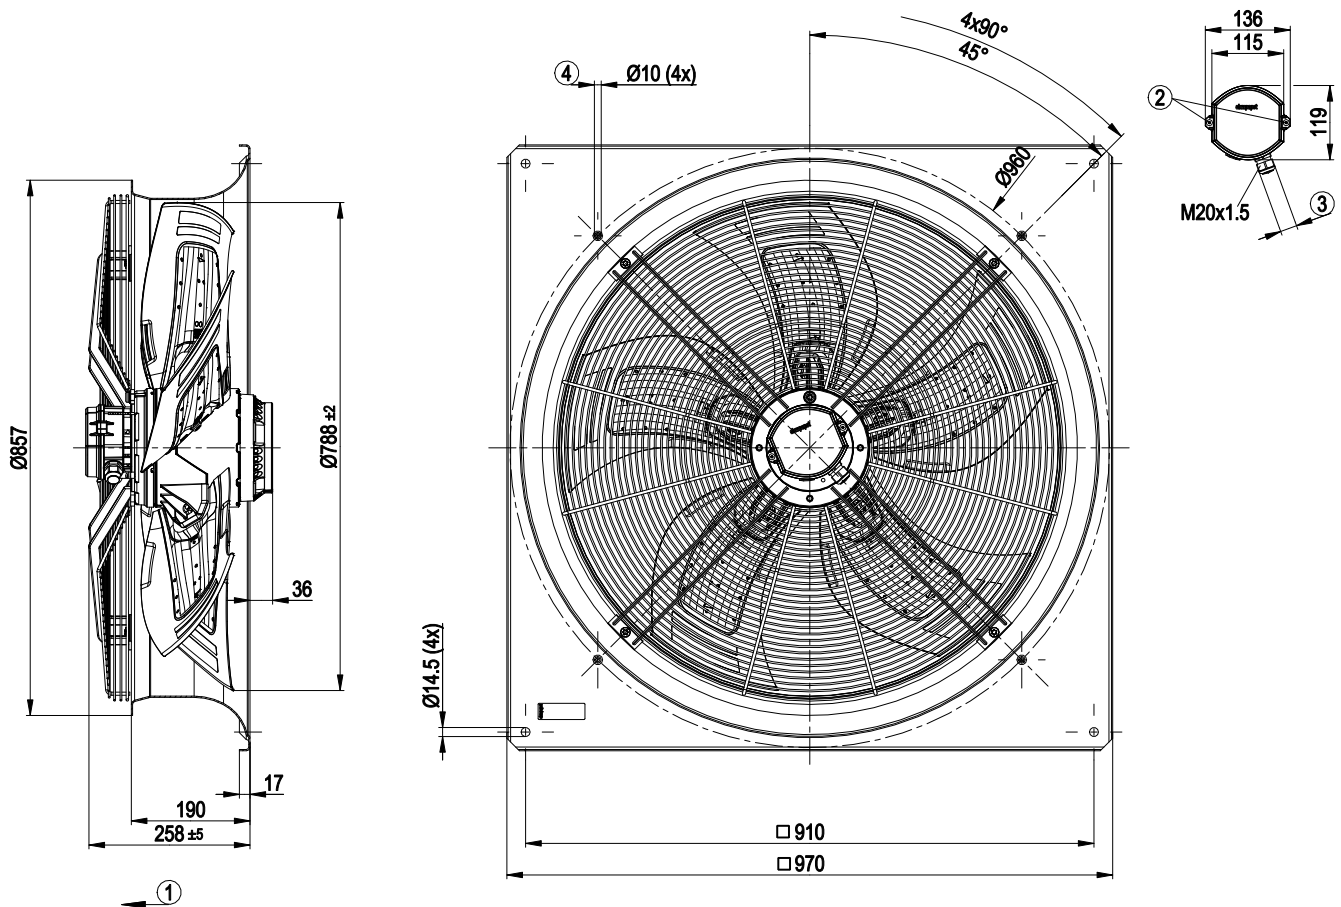


1	Direction of air flow "V"
2	Tightening torque 2.5 ± 0.4 Nm
3	Cable diameter: min. 7 mm, max. 14 mm, tightening torque 2 ± 0.3 Nm
4	Mounting holes for FlowGrid

AC axial fan - HyBlade

sickled blades (S series)
with full square nozzle

Connection screen

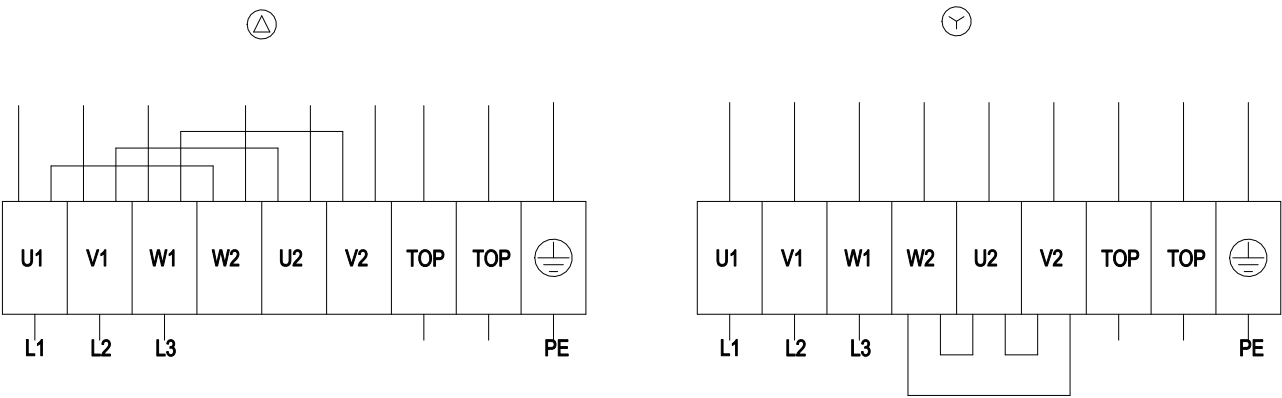

Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				




AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Charts: Air flow 50 Hz

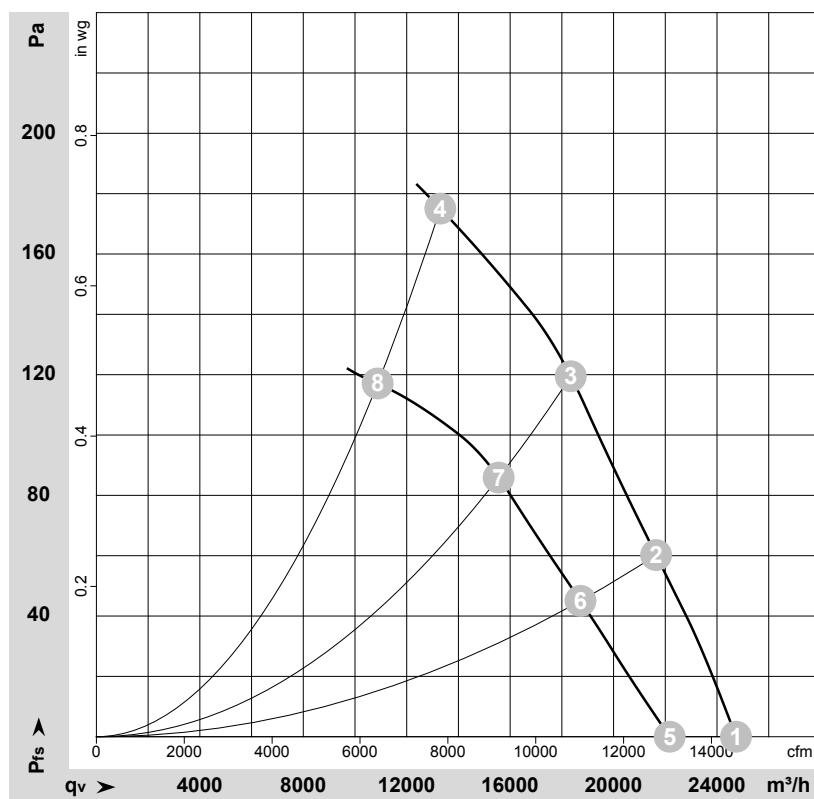

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-124239-1
Measurement: LU-124243-1

Air performance measured as per ISO 5801
Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	inH ₂ O
1	Δ	400	50	950	1474	3.99	66	73	73	24735	0	14560	0.00
2	Δ	400	50	940	1675	4.15	66	72	72	21645	60	12740	0.24
3	Δ	400	50	930	1837	4.29	67	74	73	18345	120	10795	0.48
4	Δ	400	50	915	2090	4.60	71	79	78	13300	175	7825	0.70
5	Y	400	50	840	1126	2.08	63	70	71	22170	0	13050	0.00
6	Y	400	50	810	1260	2.31	62	69	68	18720	45	11020	0.18
7	Y	400	50	790	1356	2.47	63	69	69	15555	86	9155	0.35
8	Y	400	50	750	1490	2.72	66	74	73	10875	117	6400	0.47

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

