

## AC axial fan

sickled blades (S series)

with full square nozzle

W6D800-GJ01-12 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



## Nominal data

|                               |                   |          |      |          |
|-------------------------------|-------------------|----------|------|----------|
| Type                          | W6D800-GJ01-12    |          |      |          |
| Motor                         | M6D138-LA         |          |      |          |
| Phase                         |                   | 3~       | 3~   | 3~       |
| Nominal voltage               | VAC               | 400      | 400  | 415      |
| Connection                    |                   | $\Delta$ | Y    | $\Delta$ |
| Frequency                     | Hz                | 50       | 50   | 50       |
| Type of data definition       |                   | ml       | ml   | ml       |
| Valid for approval / standard |                   | CE       | CE   | CE       |
| Speed                         | min <sup>-1</sup> | 895      | 685  | 915      |
| Power input                   | W                 | 2000     | 1270 | 1690     |
| Current draw                  | A                 | 4.3      | 2.5  | 3.7      |
| Max. back pressure            | Pa                | 180      | 100  | 90       |
| Max. ambient temperature      | °C                | 60       | 60   | 60       |
| Starting current              | A                 | 13       | 4.3  |          |

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations

## Data according to ErP directive

|                       |        |
|-----------------------|--------|
| Installation category | A      |
| Efficiency category   | Static |
| Variable speed drive  | No     |
| Specific ratio*       | 1.00   |

\* Specific ratio =  $1 + p_b / 100\,000\text{ Pa}$

|                                | Actual            | Request 2013 | Request 2015 |
|--------------------------------|-------------------|--------------|--------------|
| Overall efficiency $\eta_{es}$ | 35.4              | 31.2         | 35.2         |
| Efficiency grade N             | 40.2              | 36           | 40           |
| Power input $P_e$              | kW                | 1.76         |              |
| Air flow $q_v$                 | m <sup>3</sup> /h | 17035        |              |
| Pressure increase $p_{fs}$     | Pa                | 132          |              |
| Speed n                        | min <sup>-1</sup> | 900          |              |

Data established at point of optimum efficiency



# AC axial fan

sickled blades (S series)

with full square nozzle

## Technical features

|                                                                    |                                                         |
|--------------------------------------------------------------------|---------------------------------------------------------|
| Mass                                                               | 43.2 kg                                                 |
| Size                                                               | 800 mm                                                  |
| Surface of rotor                                                   | Cast in aluminium                                       |
| Material of terminal box                                           | Plastic, fibreglass reinforced                          |
| Material of blades                                                 | Die-cast aluminium                                      |
| Material of wall ring                                              | Sheet steel, pre-galvanised and coated in black plastic |
| Material of guard grille                                           | Steel, phosphated and coated in black plastic           |
| Number of blades                                                   | 5                                                       |
| Blade angle                                                        | 0°                                                      |
| Direction of air flow                                              | "V"                                                     |
| Direction of rotation                                              | Clockwise, seen on rotor                                |
| Type of protection                                                 | IP 55                                                   |
| Insulation class                                                   | "F"                                                     |
| Humidity class                                                     | F3-1                                                    |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                 |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                 |
| Mounting position                                                  | Any                                                     |
| Condensate discharge holes                                         | On rotor and stator sides                               |
| Operation mode                                                     | S1                                                      |
| Motor bearing                                                      | Ball bearing                                            |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                               |
| Electrical leads                                                   | Via terminal box                                        |
| Motor protection                                                   | Thermal overload protector (TOP) brought out            |
| Cable exit                                                         | Axial                                                   |
| Protection class                                                   | I (if protective earth is connected by customer)        |
| Product conforming to standard                                     | EN 61800-5-1; EN 60034; CE                              |
| Approval                                                           | VDE                                                     |




## AC axial fan

sickled blades (S series)

with full square nozzle

## Product drawing

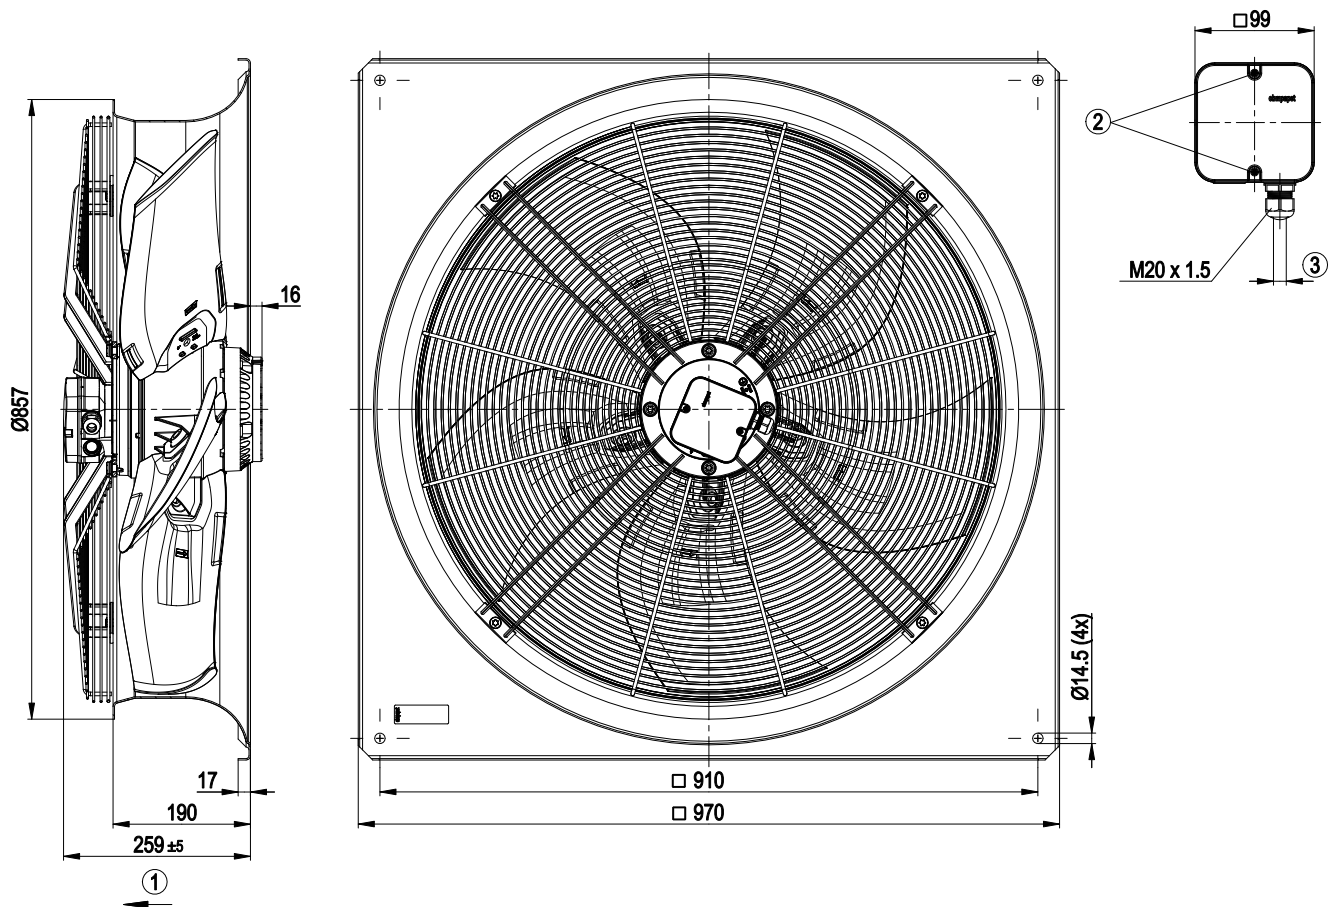


|   |                                                                             |
|---|-----------------------------------------------------------------------------|
| 1 | Direction of air flow "V"                                                   |
| 2 | Tightening torque 1.5 Nm $\pm$ 0.2 Nm                                       |
| 3 | Cable diameter: min. 7 mm, max. 14 mm; tightening torque: 2 Nm $\pm$ 0.3 Nm |

# AC axial fan

sickled blades (S series)  
with full square nozzle

## Connection screen

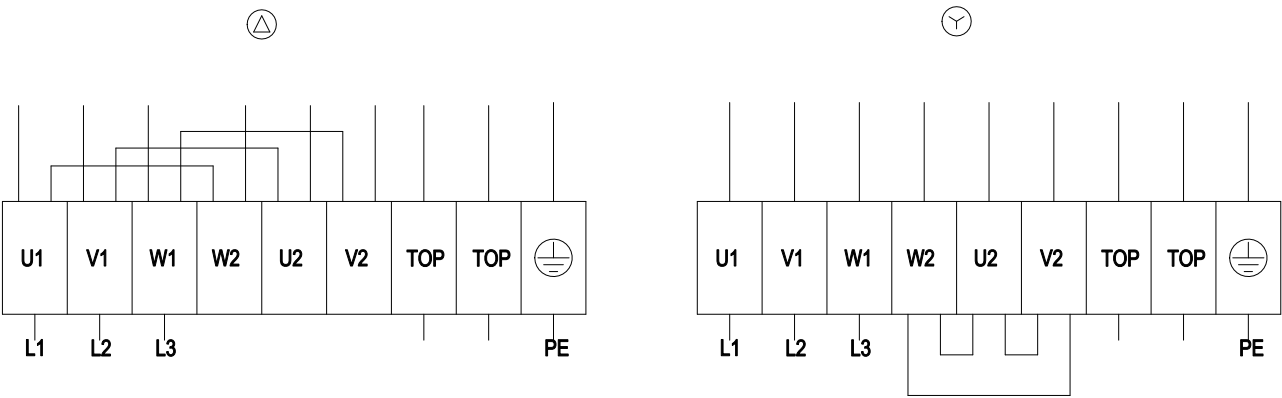


|    |                  |    |                 |     |              |
|----|------------------|----|-----------------|-----|--------------|
| Δ  | Delta connection | Y  | Star connection | L1  | = U1 = black |
| L2 | = V1 = blue      | L3 | = W1 = brown    | W2  | yellow       |
| U2 | green            | V2 | white           | TOP | 2 x grey     |
| PE | green/yellow     |    |                 |     |              |



AC axial fan  
sickled blades (S series)  
with full square nozzle

Charts: Air flow 50 Hz

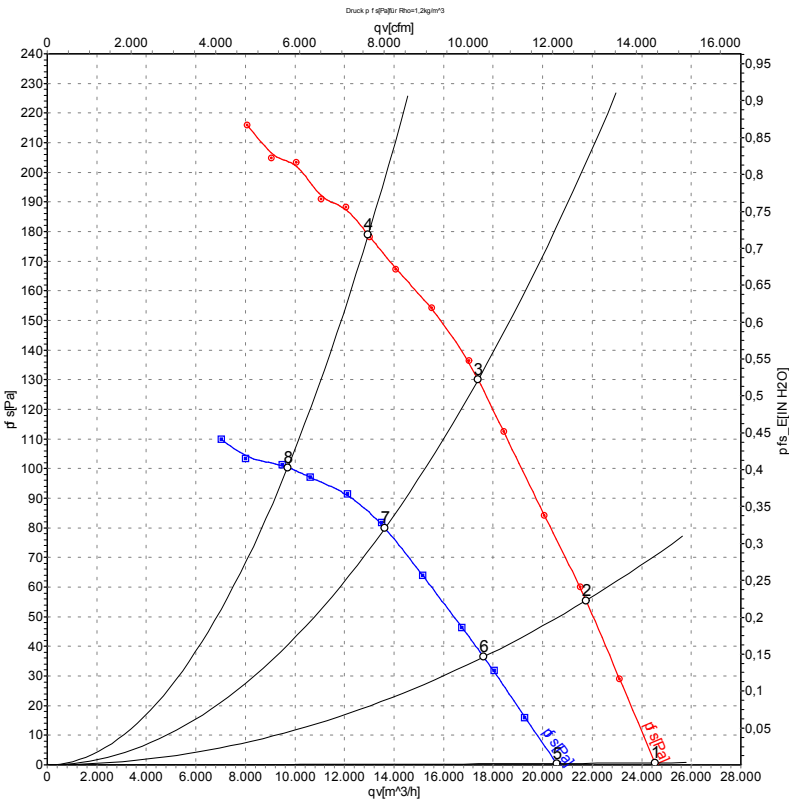

Measurement: LU-100640  
Measurement: LU-100800

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: LwA measured as per ISO 13347 /  
LpA measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | qv    | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|-------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | m³/h  | Pa              |
| 1 | Δ     | 400 | 50 | 930               | 1440           | 3.50 | 67                | 73                | 24530 | 0               |
| 2 | Δ     | 400 | 50 | 915               | 1561           | 3.50 | 65                | 71                | 21750 | 55              |
| 3 | Δ     | 400 | 50 | 900               | 1749           | 3.63 | 66                | 72                | 17390 | 130             |
| 4 | Δ     | 400 | 50 | 895               | 2000           | 4.30 | 71                | 78                | 12960 | 180             |
| 5 | Y     | 400 | 50 | 785               | 1030           | 1.90 | 63                | 70                | 20570 | 0               |
| 6 | Y     | 400 | 50 | 750               | 1080           | 2.02 | 61                | 68                | 17620 | 36              |
| 7 | Y     | 400 | 50 | 705               | 1157           | 2.17 | 61                | 67                | 13630 | 80              |
| 8 | Y     | 400 | 50 | 685               | 1270           | 2.50 | 64                | 72                | 9705  | 100             |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side  
qv = Air flow · p<sub>fs</sub> = Pressure increase

