

AC axial fan

sickled blades (S series)

with full square nozzle

W6D910-GA13-10 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W6D910-GA13-10		
Motor	M6D138-NA		
Phase		3~	3~
Nominal voltage	VAC	400	400
Connection		Δ	Y
Frequency	Hz	50	50
Type of data definition		ml	ml
Valid for approval / standard		-	-
Speed	min ⁻¹	845	635
Power input	W	2240	1310
Current draw	A	4.9	2.4
Max. back pressure	Pa	120	70
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	60	60
Starting current	A	20	6

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC axial fan

sickled blades (S series)

with full square nozzle

Technical features

Mass	51.7 kg
Size	910 mm
Surface of rotor	Cast in aluminium
Material of terminal box	PP plastic
Material of blades	Aluminium sheet insert, sprayed with PP plastic
Material of wall ring	Sheet steel, pre-galvanised and plastic-coated in light grey (RAL 7035)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	0°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	On rotor and stator sides
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034; EN 61800-5-1
Approval	VDE




W6D910-GA13-10

AC axial fan

sickled blades (S series)

with full square nozzle

Product drawing

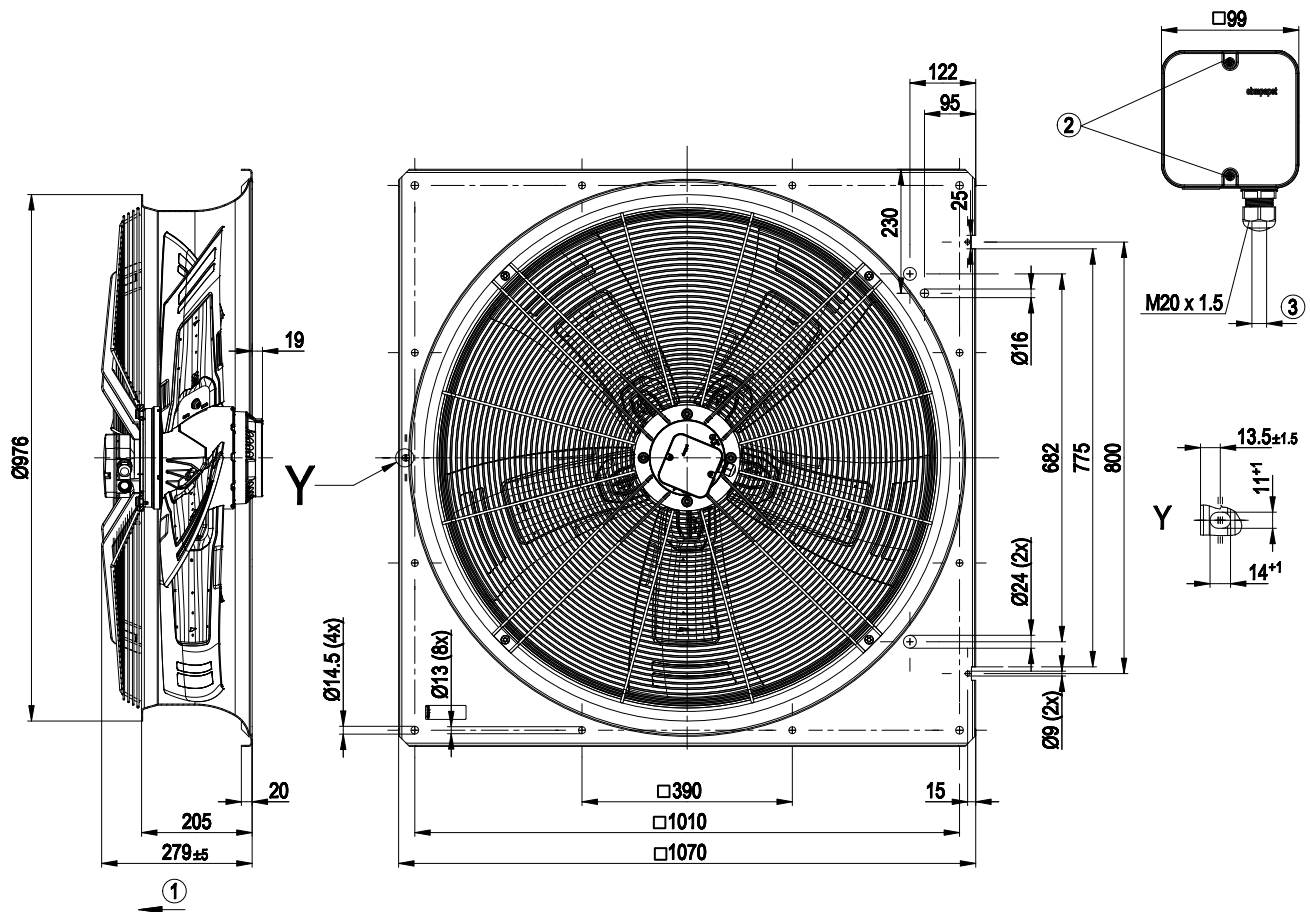


1	Direction of air flow "V"
2	Tightening torque 1.5±0.2 Nm
3	Cable diameter: min. 7 mm, max. 14 mm; tightening torque: 2±0.3 Nm

AC axial fan

sickled blades (S series)
with full square nozzle

Connection screen

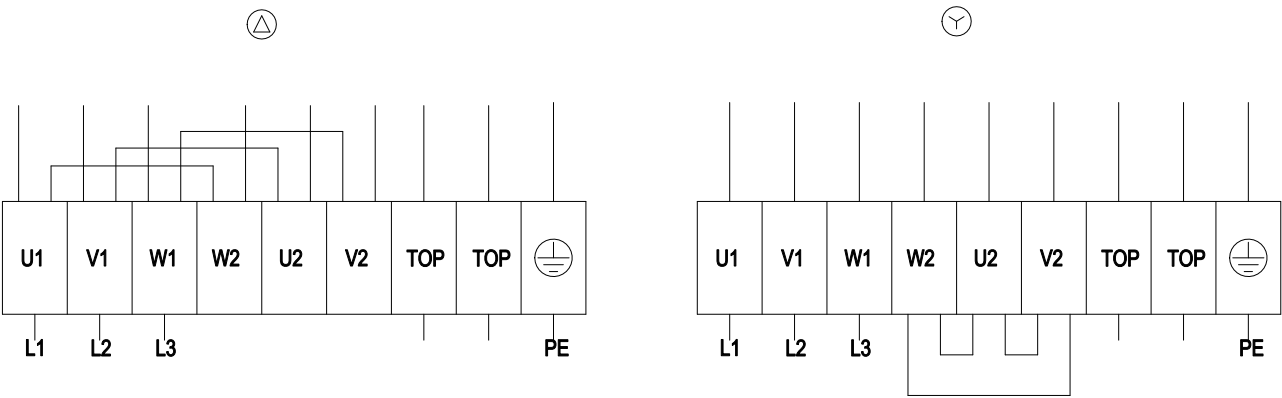


Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				



AC axial fan
sickled blades (S series)
with full square nozzle

Charts: Air flow 50 Hz

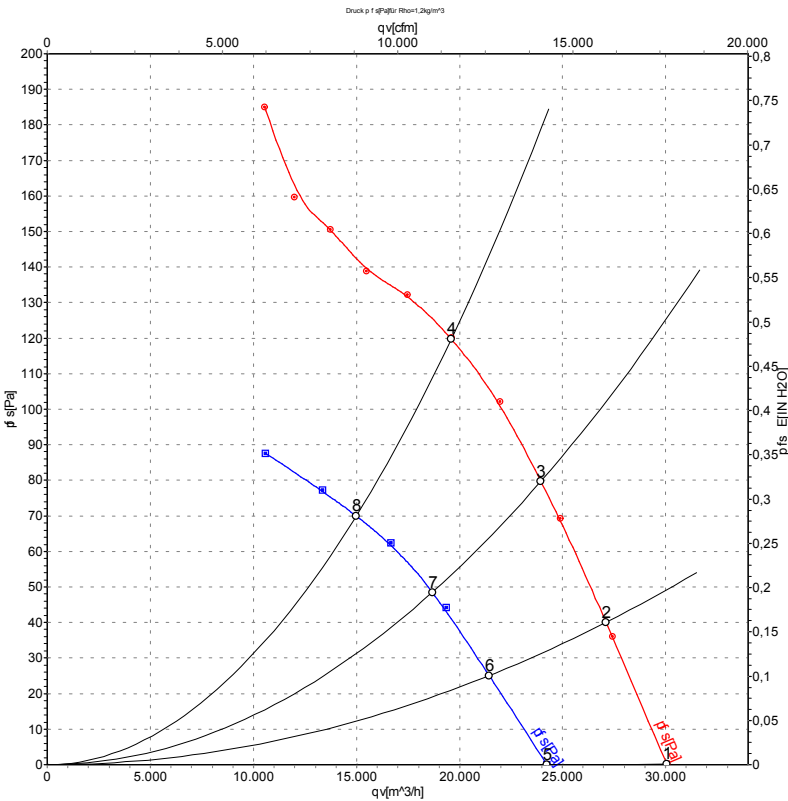

Measurement: LU-118681
Measurement: LU-118840

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa
1	Δ	400	50	890	1767	4.35	70	78	81	30060	0
2	Δ	400	50	875	1920	4.48	69	77	80	27100	40
3	Δ	400	50	865	2064	4.62	69	77	80	23950	80
4	Δ	400	50	845	2240	4.90	71	78	81	19600	120
5	Y	400	50	715	1152	2.11	64	72	74	24230	0
6	Y	400	50	685	1198	2.17	63	70	73	21440	25
7	Y	400	50	660	1243	2.25	62	69	72	18680	49
8	Y	400	50	635	1310	2.40	63	71	73	14980	70

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase

