

AC axial fan - HyBlade

sickle-shaped blades (S series)

ebm-papst ventilator (Shanghai)Co.,Ltd.

No.418, Hua jing Road, Wai Gao qiao Free Trade Zone, Pudong

W6D910-GA15-20/F01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W6D910-GA15-20/F01		
Motor	M6D138-NA		
Phase		3~	3~
Nominal voltage	VAC	400	400
Wiring		Δ	Y
Frequency	Hz	50	50
Method of obtaining data		ml	ml
Valid for approval/standard		-	-
Speed (rpm)	min ⁻¹	865	620
Power consumption	W	2310	1350
Current draw	A	4.6	2.6
Max. back pressure	Pa	150	75
Max. back pressure	inH ₂ O	0.6	0.3
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	45	45


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description

Weight	52.4 kg
Fan size	910 mm
Rotor surface	Cast in aluminum
Terminal box material	PP plastic
Blade material	Sheet aluminum insert, sprayed with PP plastic
Material of wall ring	Sheet steel, pre-galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade pitch	0°
Airflow direction	"V"
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F3-1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	On rotor and stator sides
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	> 3.5 mA
Electrical hookup	Via terminal box
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; EN 60034-1 (2010)

Product drawing

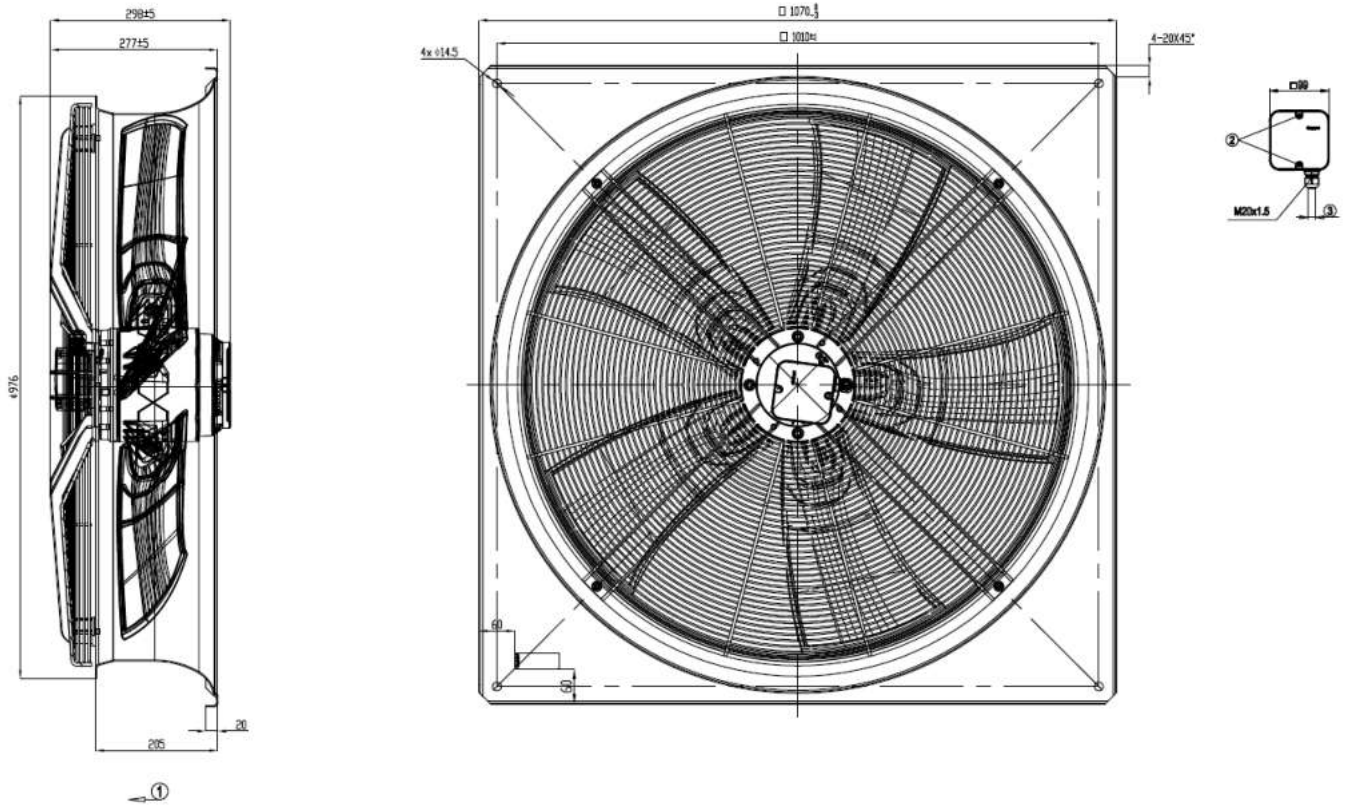


1	Airflow direction "V"
2	Tightening torque 1.5 ± 0.2 Nm
3	Cable diameter: min. 7 mm, max. 14 mm; tightening torque 2.0 ± 0.30 Nm

AC axial fan - HyBlade

sickle-shaped blades (S series)


Connection diagram

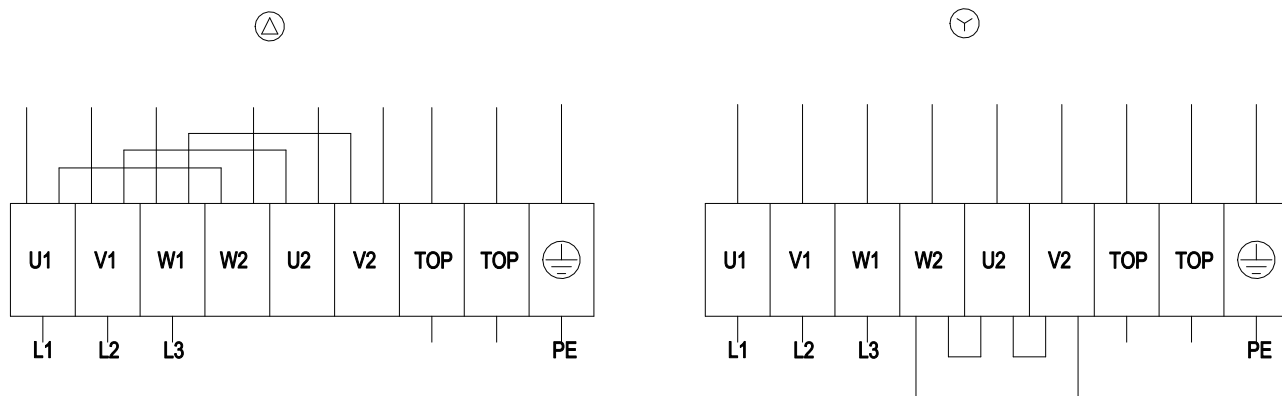

Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x gray
PE	green/yellow				



Curves: Air performance 50 Hz

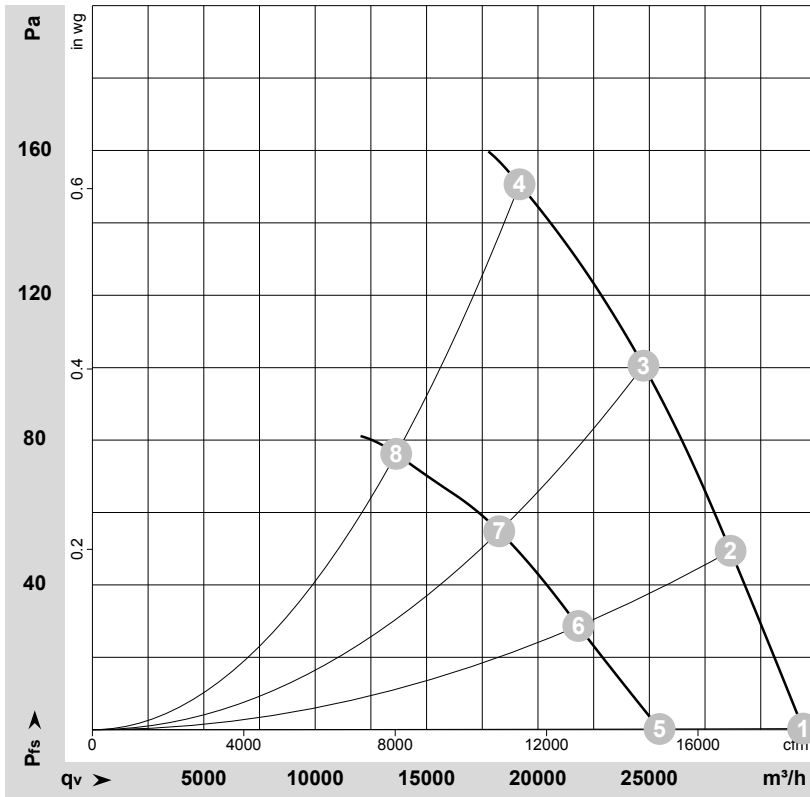

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Stage	Wired	U	f	n	P _e	I	q _v	P _{fs}	q _v	P _{fs}
			V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	1	Δ	400	50	915	1661	3.63	31905	0	18775	0.00
2	1	Δ	400	50	895	1954	4.06	28645	50	16860	0.20
3	1	Δ	400	50	880	2139	4.34	24735	100	14560	0.40
4	1	Δ	400	50	865	2310	4.60	19175	150	11285	0.60
5	1	Y	400	50	725	1158	2.16	25460	0	14985	0.00
6	1	Y	400	50	685	1239	2.32	21810	29	12840	0.12
7	1	Y	400	50	650	1298	2.45	18260	55	10750	0.22
8	1	Y	400	50	620	1350	2.60	13635	75	8025	0.30

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase

