

AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

W6D910-GC01-01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W6D910-GC01-01				
Motor	M6D138-NA				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	400	400	480	480
Connection		Δ	Y	Δ	Y
Frequency	Hz	50	50	60	60
Type of data definition		ml	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE
Speed (rpm)	min ⁻¹	940	830	1110	950
Power input	W	1520	1150	2380	1770
Current draw	A	4.1	2.12	4.53	2.73
Max. back pressure	Pa	165	125	210	150
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	70	70	55	55
Starting current	A	18.6	6.2	20	6.0

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
 Subject to alterations

Data according to ErP directive

		Actual	Request 2015		
01 Overall efficiency η_{es}	%	39.7	34.7	09 Power input P_e	kW
02 Measurement category		A		09 Air flow q_v	m ³ /h
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa
04 Efficiency grade N		45	40	10 Speed (rpm) n	min ⁻¹
05 Variable speed drive		No		11 Specific ratio*	1.00

Data definition with optimum efficiency.
 The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-120961



AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Technical features

Mass	52.8 kg
Size	910 mm
Surface of rotor	Cast in aluminium
Material of terminal box	PP plastic
Material of blades	Aluminium sheet insert, sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	-10°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensate discharge holes	On rotor and stator sides
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2010); EN 61800-5-1; CE
Approval	VDE; EAC




AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Product drawing

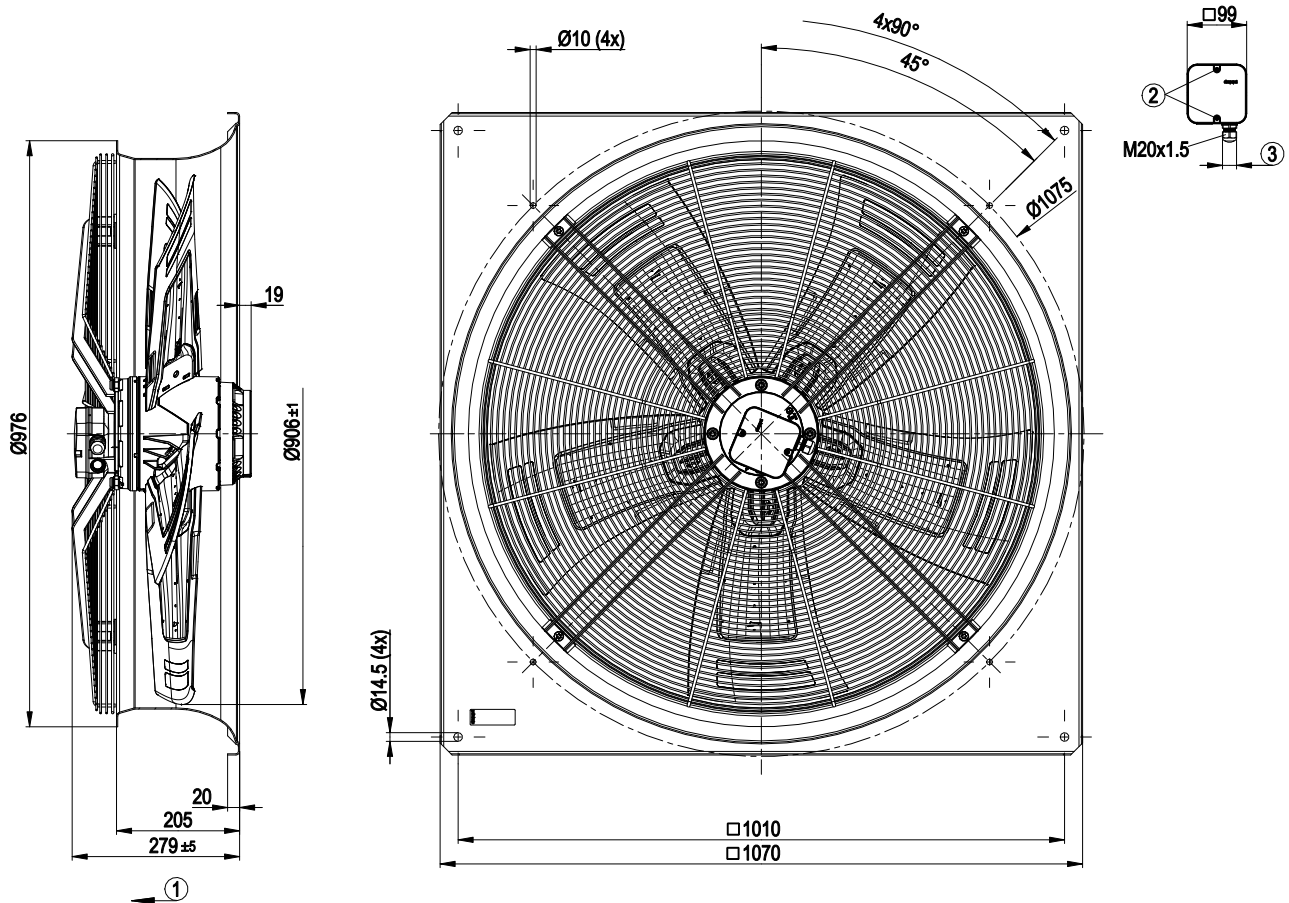


1	Direction of air flow "V"
2	Tightening torque 1.5±0.2 Nm
3	Cable diameter: min. 7 mm, max. 14 mm; tightening torque 2±0.3 Nm

AC axial fan - HyBlade

sickled blades (S series)
with full square nozzle

Connection screen

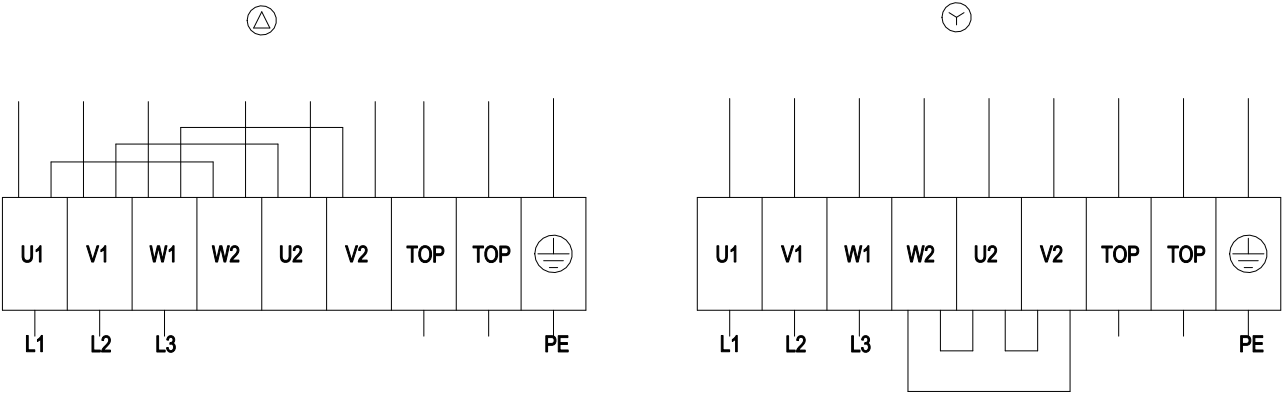

Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				




AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Charts: Air flow 50 Hz

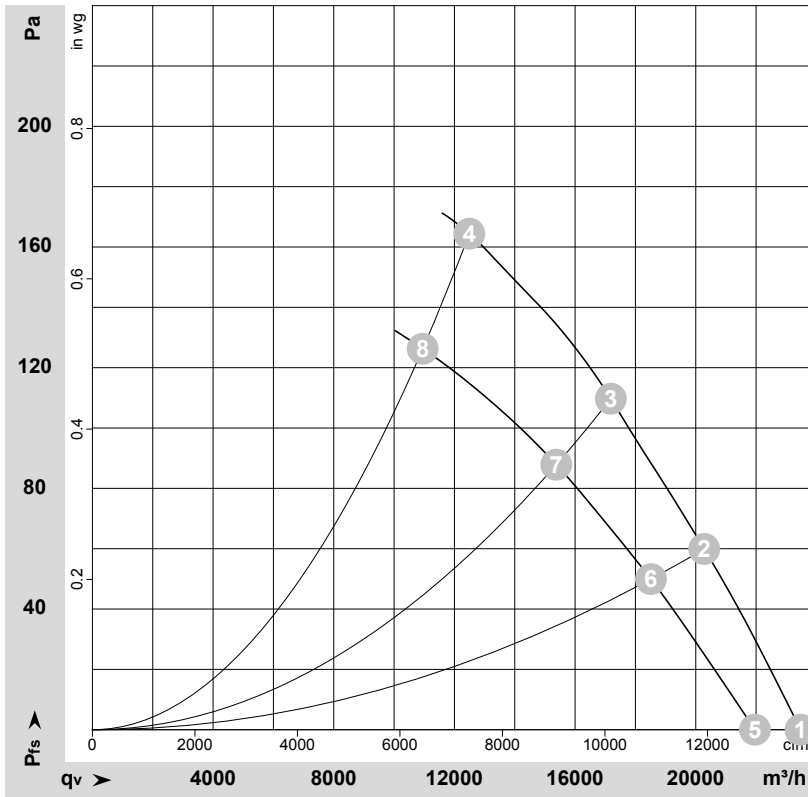

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-120961-1
Measurement: LU-120963-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _V	p _{fs}	q _V	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Δ	400	50	970	933	3.71	73	80	80	23475	0	13815	0.00
2	Δ	400	50	960	1186	3.80	71	78	78	20280	60	11935	0.24
3	Δ	400	50	950	1373	3.94	71	79	78	17185	110	10115	0.44
4	Δ	400	50	940	1520	4.10	82	89	90	12495	165	7355	0.66
5	Y	400	50	910	716	1.44	71	78	78	21960	0	12925	0.00
6	Y	400	50	875	908	1.73	68	76	75	18515	50	10900	0.20
7	Y	400	50	850	1046	1.95	69	76	76	15375	88	9050	0.35
8	Y	400	50	830	1150	2.12	77	85	85	10950	126	6445	0.51

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_V = Air flow · p_{fs} = Pressure increase




AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Charts: Air flow 60 Hz

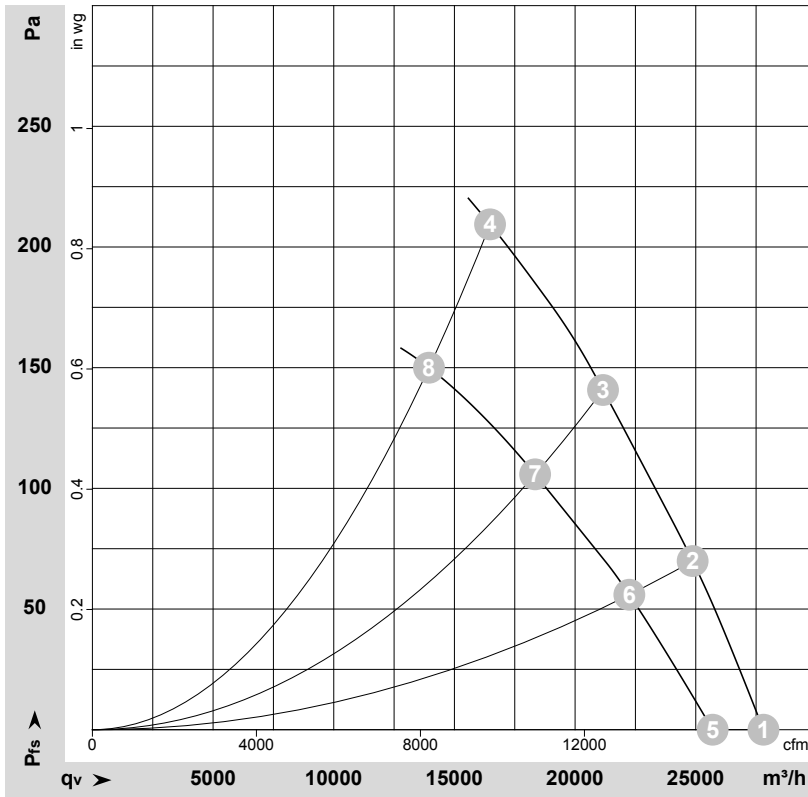

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-120964-1
Measurement: LU-120965-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Δ	480	60	1155	1458	3.86	78	85	84	27805	0	16365	0.00
2	Δ	480	60	1140	1811	4.07	76	83	82	24870	70	14640	0.28
3	Δ	480	60	1130	2143	4.33	76	83	82	21155	140	12455	0.56
4	Δ	480	60	1110	2380	4.53	86	93	94	16475	210	9700	0.84
5	Y	480	60	1070	1150	1.83	75	83	82	25700	0	15125	0.00
6	Y	480	60	1025	1415	2.19	72	80	79	22250	57	13095	0.23
7	Y	480	60	985	1624	2.51	72	79	79	18345	106	10795	0.43
8	Y	480	60	950	1770	2.73	82	89	90	13945	151	8210	0.61

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

