

AC axial fan

sickled blades (S series)

with full square nozzle

W6D910-GQ01-08 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
County court Stuttgart · HRB 590142



Nominal data

Type	W6D910-GQ01-08				
Motor	M6D138-NA				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	400	400	480	480
Connection		Δ	Y	Δ	Y
Frequency	Hz	50	50	60	60
Type of data definition		ml	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE
Speed	min ⁻¹	920	760	1100	890
Power input	W	1960	1370	2810	1920
Current draw	A	4.5	2.55	5.0	3.05
Max. back pressure	Pa	170	115	140	90
Max. ambient temperature	°C	60	60	50	50
Starting current	A	18.6	6.2	21	7.0

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2013	Request 2015
Installation category	A			
Efficiency category	Static			
Variable speed drive	No			
Specific ratio [*]	1.00			
Overall efficiency η_{es}		39.4	31.4	35.4
Efficiency grade N		44	36	40
Power input P_e	kW	1.88		
Air flow q_v	m ³ /h	17980		
Pressure increase p_{fs}	Pa	149		
Speed n	min ⁻¹	925		

Data established at point of optimum efficiency

^{*} Specific ratio = $1 + p_b / 100\,000\text{ Pa}$



AC axial fan

sickled blades (S series)

with full square nozzle

Technical features


Mass	56.7 kg
Size	910 mm
Surface of rotor	Cast in aluminium
Material of terminal box	PP plastic
Material of blades	Die-cast aluminium
Material of wall ring	Sheet steel, pre-galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	-5°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	On rotor and stator sides
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034; EN 61800-5-1; CE
Approval	VDE



AC axial fan

sickled blades (S series)
with full square nozzle

Product drawing

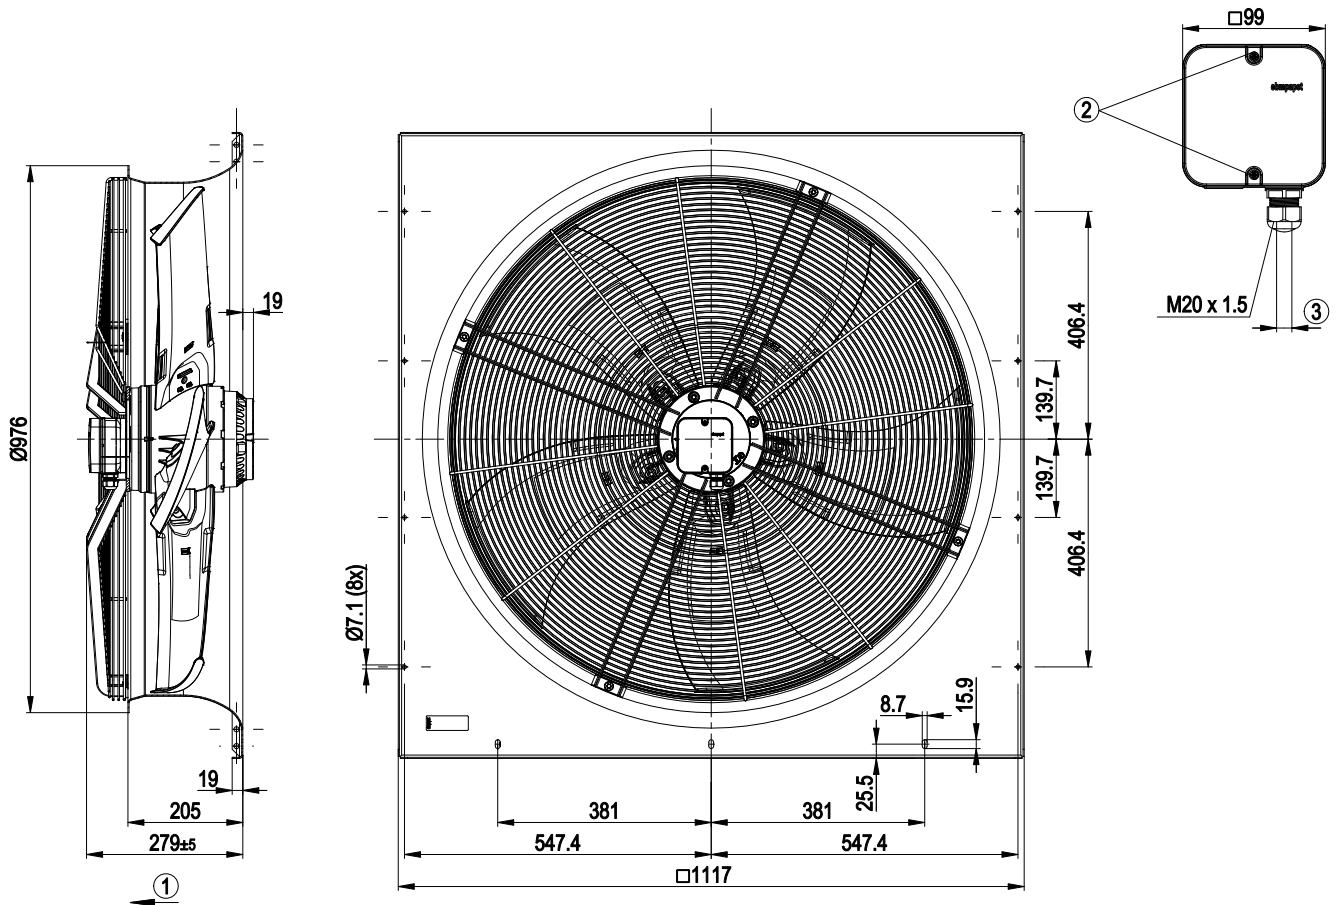


1	Direction of air flow "V"
2	Tightening torque 1.5 ± 0.2 Nm
3	Cable diameter: min. 7 mm, max. 14 mm, tightening torque: 2 ± 0.3 Nm



AC axial fan

sickled blades (S series)
with full square nozzle

Connection screen

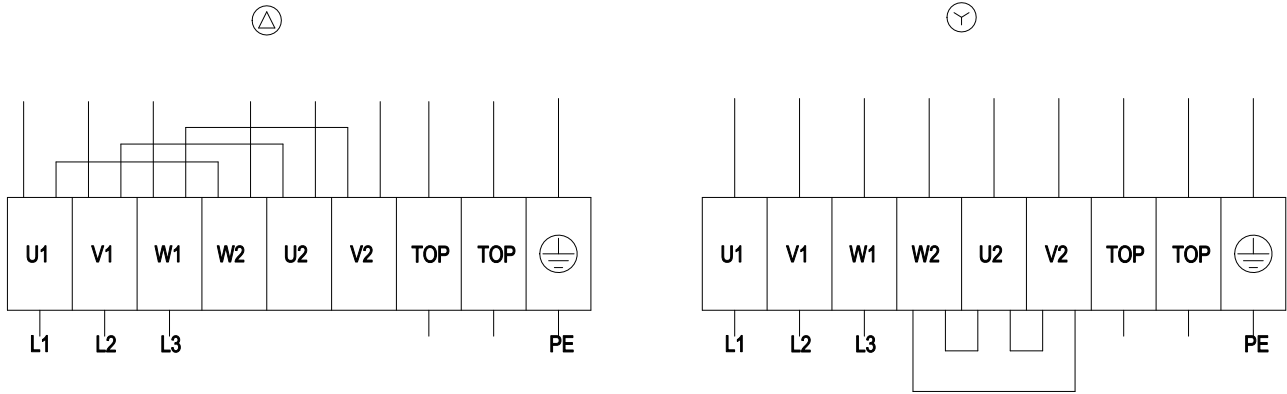


Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				



AC axial fan

sickled blades (S series)
with full square nozzle

Charts: Air flow 50 Hz

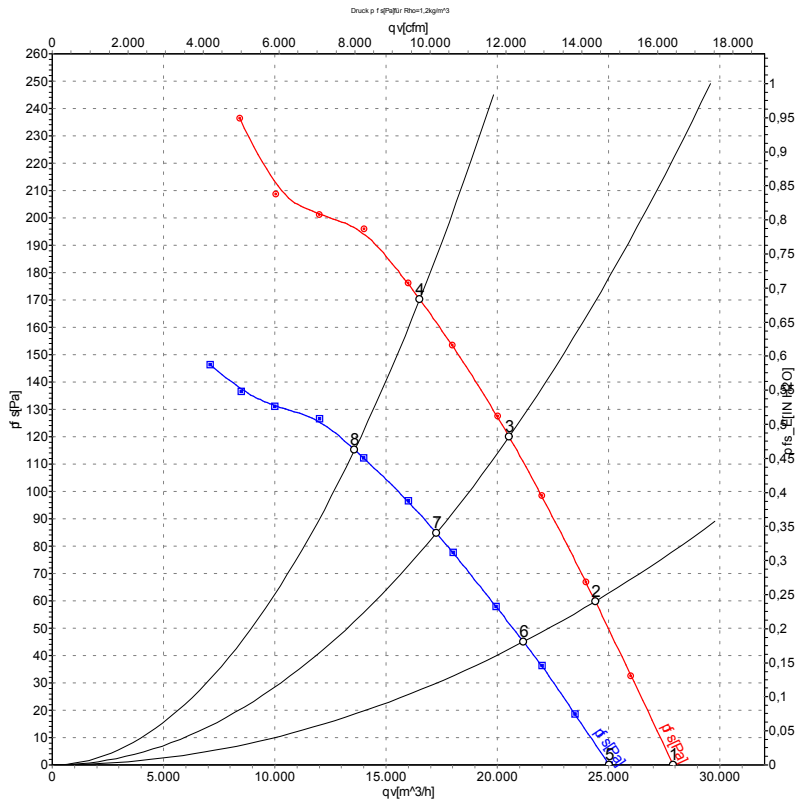

Measurement: LU-102489
Measurement: LU-102493

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa
1	Δ	400	50	955	1290	3.95	71	78	77	27900	0
2	Δ	400	50	940	1545	4.12	70	77	75	24400	60
3	Δ	400	50	930	1772	4.34	71	77	76	20530	120
4	Δ	400	50	920	1960	4.50	73	80	78	16510	170
5	Y	400	50	860	958	1.82	69	76	74	25020	0
6	Y	400	50	820	1149	2.14	67	74	71	21170	45
7	Y	400	50	790	1271	2.36	67	73	71	17250	85
8	Y	400	50	760	1370	2.55	68	74	73	13580	115


Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase



AC axial fan

sickled blades (S series)
with full square nozzle

Charts: Air flow 60 Hz

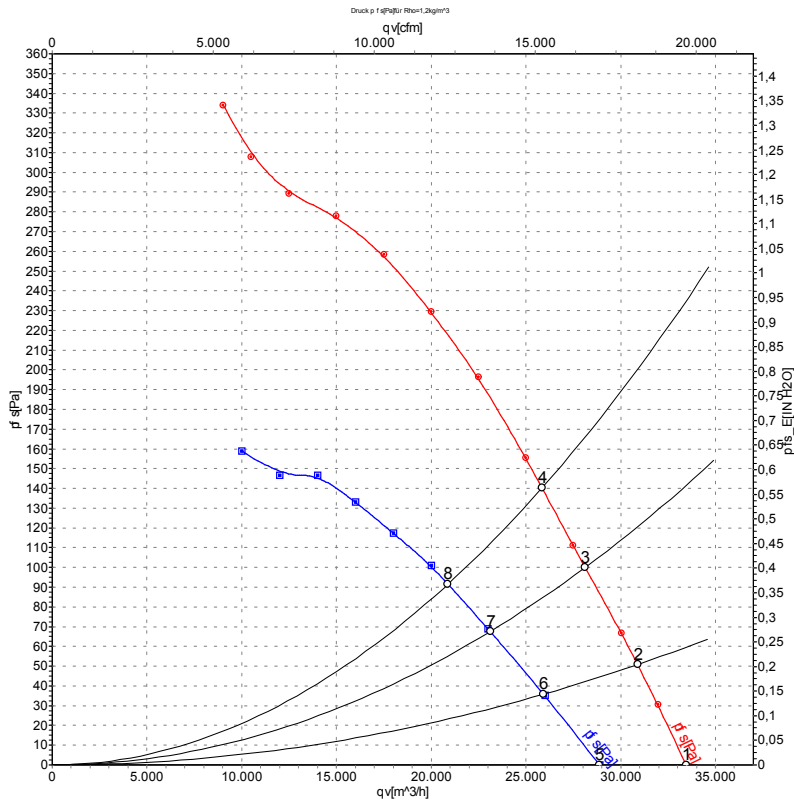

Measurement: LU-102491
Measurement: LU-102494

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	L _{pA_{in}}	L _{wA_{in}}	L _{wA_{out}}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa
1	Δ	480	60	1130	2089	4.32	76	83	81	33450	0
2	Δ	480	60	1120	2362	4.57	75	82	80	30880	51
3	Δ	480	60	1105	2605	4.79	74	81	79	28120	100
4	Δ	480	60	1100	2810	5.00	74	81	79	25850	140
5	Y	480	60	990	1573	2.47	72	79	77	28880	0
6	Y	480	60	950	1722	2.72	71	78	76	25920	36
7	Y	480	60	920	1833	2.89	70	76	74	23110	68
8	Y	480	60	890	1920	3.05	69	76	74	20880	92

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · L_{pA_{in}} = Sound pressure level inlet side · L_{wA_{in}} = Sound power level inlet side
L_{wA_{out}} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase

