

# AC axial fan - HyBlade

sickled blades (S series)  
with full square nozzle

W6E500-GJ05-01 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                               |                   |      |      |
|-------------------------------|-------------------|------|------|
| Type                          | W6E500-GJ05-01    |      |      |
| Motor                         | M6E110-EF         |      |      |
| Phase                         |                   | 1~   | 1~   |
| Nominal voltage               | VAC               | 230  | 230  |
| Frequency                     | Hz                | 50   | 60   |
| Type of data definition       |                   | ml   | ml   |
| Valid for approval / standard |                   | CE   | CE   |
| Speed (rpm)                   | min <sup>-1</sup> | 865  | 810  |
| Power input                   | W                 | 220  | 290  |
| Current draw                  | A                 | 0.97 | 1.3  |
| Motor capacitor               | µF                | 5    | 5    |
| Capacitor voltage             | VDB               | 400  | 400  |
| Max. back pressure            | Pa                | 60   | 57   |
| Min. ambient temperature      | °C                | -40  | -40  |
| Max. ambient temperature      | °C                | 80   | 70   |
| Starting current              | A                 | 1.7  | 1.51 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data in accordance with ecodesign regulation EU 327/2011 (EN 17166)

|                                   |   | Actual | Request 2015 |                               |                   |      |
|-----------------------------------|---|--------|--------------|-------------------------------|-------------------|------|
| 01 Overall efficiency $\eta_{es}$ | % | 29.6   | 29.4         | 09 Power input $P_e$          | kW                | 0.2  |
| 02 Measurement category           |   | A      |              | 09 Air flow $q_v$             | m³/h              | 4050 |
| 03 Efficiency category            |   | Static |              | 09 Pressure increase $p_{fs}$ | Pa                | 55   |
| 04 Efficiency grade N             |   | 40.2   | 40           | 10 Speed (rpm) n              | min <sup>-1</sup> | 875  |
| 05 Variable speed drive           |   | No     |              | 11 Specific ratio*            |                   | 1.00 |

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-199819



# AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

## Technical features

|                                                                    |                                                                    |
|--------------------------------------------------------------------|--------------------------------------------------------------------|
| Mass                                                               | 14.5 kg                                                            |
| Size                                                               | 500 mm                                                             |
| Motor size                                                         | 110                                                                |
| Surface of rotor                                                   | Coated in black                                                    |
| Material of terminal box                                           | PP plastic                                                         |
| Material of blades                                                 | Press-fitted sheet steel blank, sprayed with PP plastic            |
| Material of wall ring                                              | Sheet steel, galvanised and coated in black plastic (RAL 9005)     |
| Material of guard grille                                           | Steel, coated in black plastic (RAL9005)                           |
| Number of blades                                                   | 5                                                                  |
| Direction of air flow                                              | V                                                                  |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                                   |
| Type of protection                                                 | IP54                                                               |
| Insulation class                                                   | "F"                                                                |
| Humidity (F) / environmental protection class (H)                  | H2                                                                 |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                            |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                            |
| Mounting position                                                  | Shaft horizontal or rotor on bottom; rotor on top on request       |
| Condensation drainage holes                                        | Rotor-side                                                         |
| Operation mode                                                     | S1                                                                 |
| Motor bearing                                                      | Ball bearing                                                       |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                          |
| Electrical connection                                              | Terminal box; Via terminal box, capacitor integrated and connected |
| Motor protection                                                   | Thermal overload protector (TOP) brought out, basic insulation     |
| Protection class                                                   | I (if protective earth is connected by customer)                   |
| Motor capacitor according to EN 60252-1 in safety protection class | S0                                                                 |
| Product conforming to standard                                     | EN 61800-5-1; CE                                                   |
| Approval                                                           | VDE; CCC; EAC                                                      |




# AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

## Product drawing

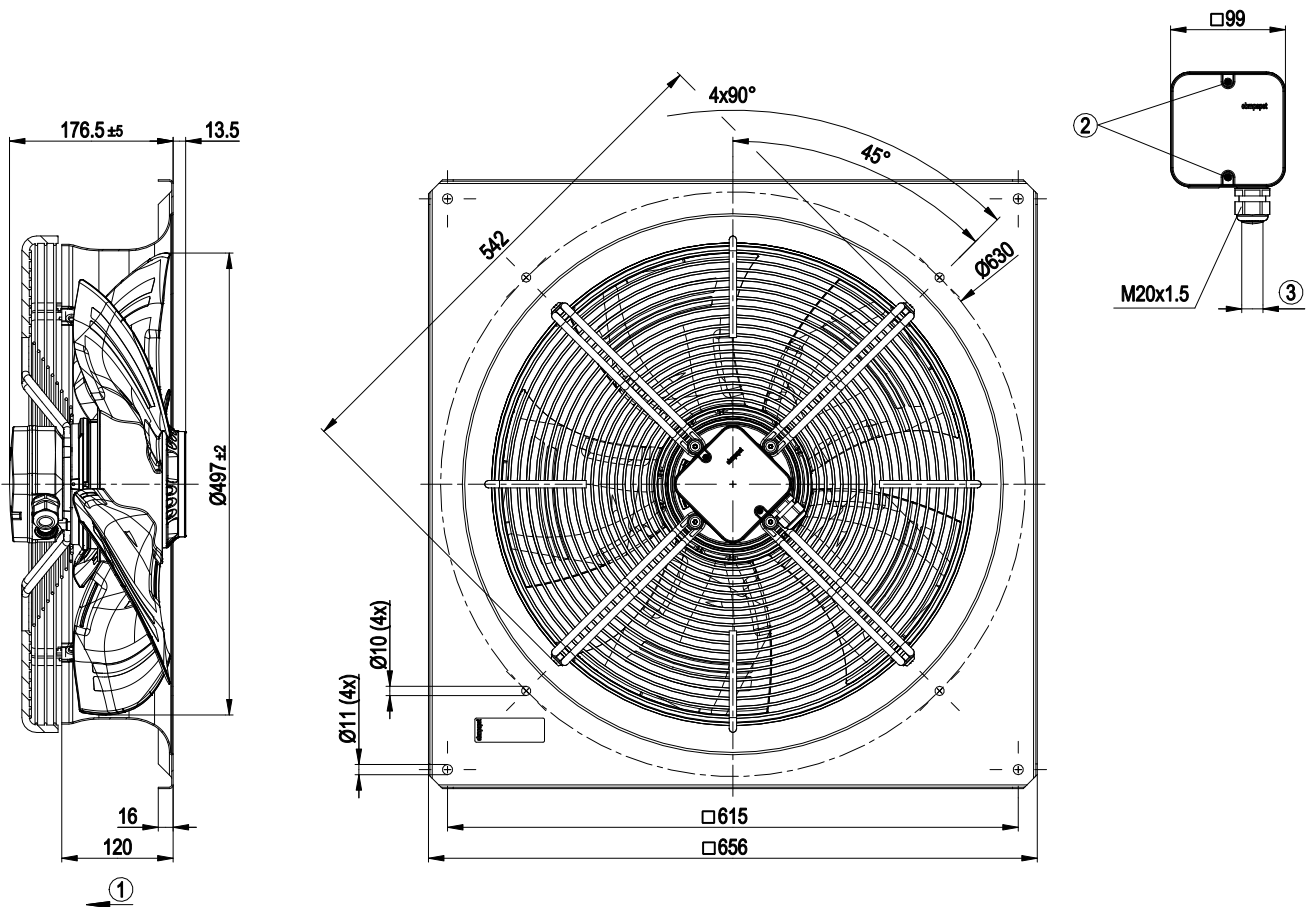


- |   |                                                                   |
|---|-------------------------------------------------------------------|
| 1 | Direction of air flow "V"                                         |
| 2 | Tightening torque 1.5±0.2 Nm                                      |
| 3 | Cable diameter: min. 6 mm, max. 12 mm, tightening torque 2±0.3 Nm |

# AC axial fan - HyBlade

sickled blades (S series)  
with full square nozzle

## Connection screen



|    |                |     |       |   |              |
|----|----------------|-----|-------|---|--------------|
| L  | = U1 = blue    | Z   | brown | N | = U2 = black |
| PE | green / yellow | TOP | grey  |   |              |




## AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

## Charts: Air flow 50 Hz

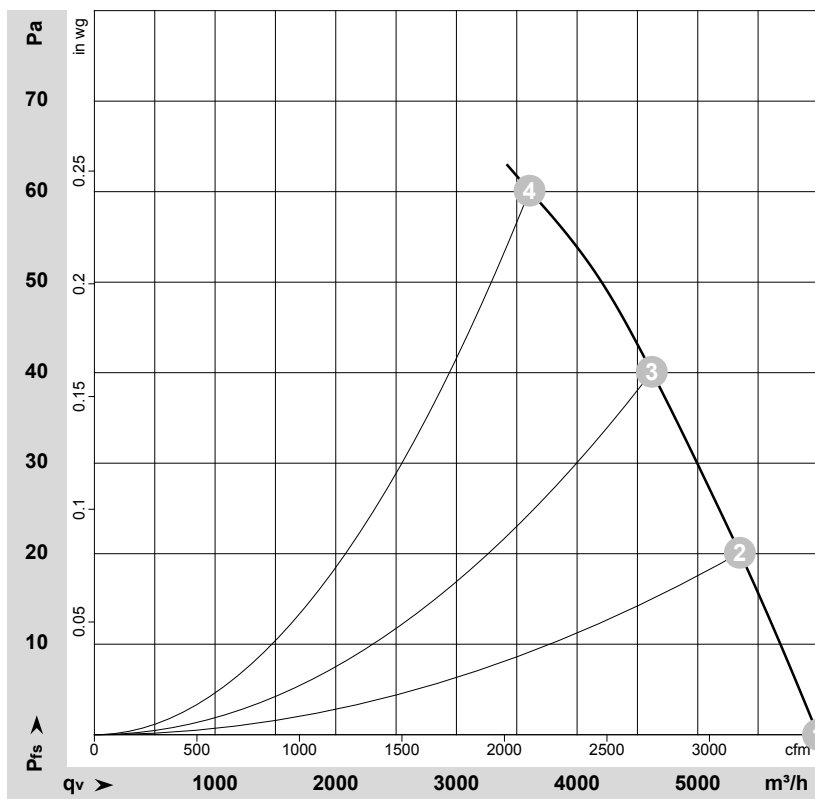

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-136414-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 230 | 50 | 915               | 175            | 0.76 | 60                | 66                | 66                 | 5995              | 0               | 3530           | 0.00            |
| 2 | 230 | 50 | 900               | 190            | 0.83 | 57                | 64                | 64                 | 5350              | 20              | 3150           | 0.08            |
| 3 | 230 | 50 | 885               | 204            | 0.89 | 55                | 62                | 62                 | 4620              | 40              | 2720           | 0.16            |
| 4 | 230 | 50 | 865               | 220            | 0.97 | 54                | 61                | 60                 | 3605              | 60              | 2125           | 0.24            |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · LwA<sub>out</sub> = Sound power level outlet side  
 q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase




# AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

## Charts: Air flow 60 Hz

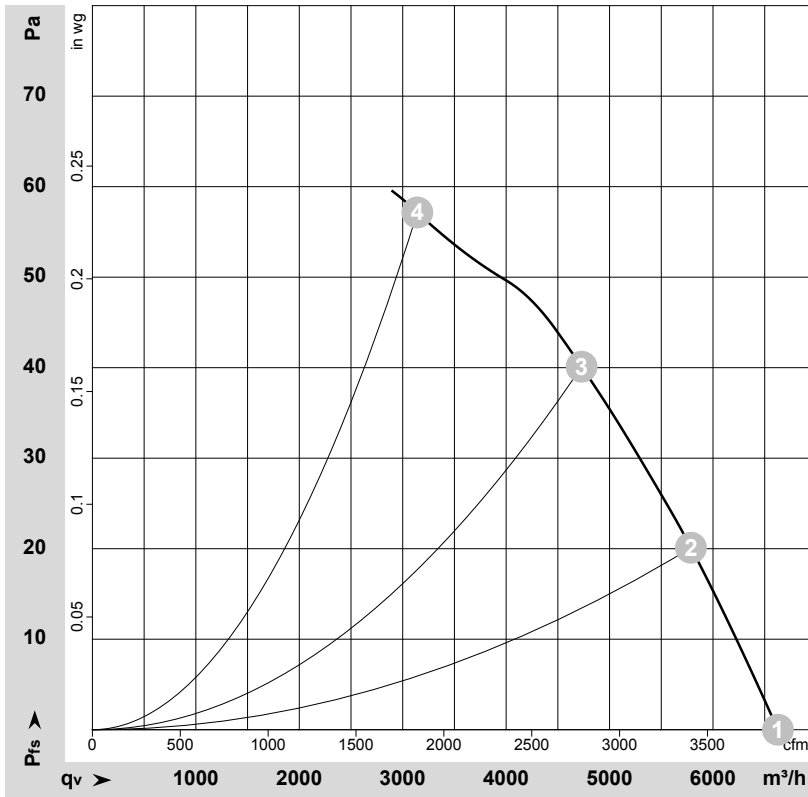

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-136419-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 230 | 60 | 1010              | 255            | 1.11 | 62                | 69                | 68                 | 6630              | 0               | 3900           | 0.00            |
| 2 | 230 | 60 | 965               | 268            | 1.17 | 59                | 66                | 65                 | 5785              | 20              | 3405           | 0.08            |
| 3 | 230 | 60 | 900               | 280            | 1.24 | 56                | 63                | 63                 | 4730              | 40              | 2785           | 0.16            |
| 4 | 230 | 60 | 810               | 290            | 1.30 | 54                | 61                | 61                 | 3140              | 57              | 1850           | 0.23            |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · LwA<sub>out</sub> = Sound power level outlet side  
 q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

