

## AC axial fan

sickle-shaped blades (S series)

with integrated diffuser

W6E500-KJ05-21 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Type	W6E500-KJ05-21		
Motor	M6E110-EF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		ml	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min <sup>-1</sup>	860	830
Power consumption	W	215	290
Current draw	A	0.95	1.3
Capacitor	µF	5	5
Capacitor voltage	VDB	400	400
Capacitor standard		S0 (CE)	S0 (CE)
Max. back pressure	Pa	55	55
Max. back pressure	in. wg	0.22	0.22
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	60	60
Starting current	A	1.7	1.51

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	30.2	29.4	09 Power consumption $P_e$	kW	0.21
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	3995
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	59
04 Efficiency grade N		40.8	40	10 Speed (rpm) n	min <sup>-1</sup>	865
05 Variable speed drive		No		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_g / 100\,000\text{ Pa}$ 

LU-181744



# AC axial fan

sickle-shaped blades (S series)  
with integrated diffuser

## Technical description

Weight	12.0 kg
Size	500 mm
Motor size	110
Rotor surface	Painted black
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Fan housing material	PP plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See fitting instructions
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60034-1 (2010); EN 61800-5-1; CE
Approval	EAC; VDE




W6E500-KJ05-21

# AC axial fan

sickle-shaped blades (S series)  
with integrated diffuser

## Product drawing

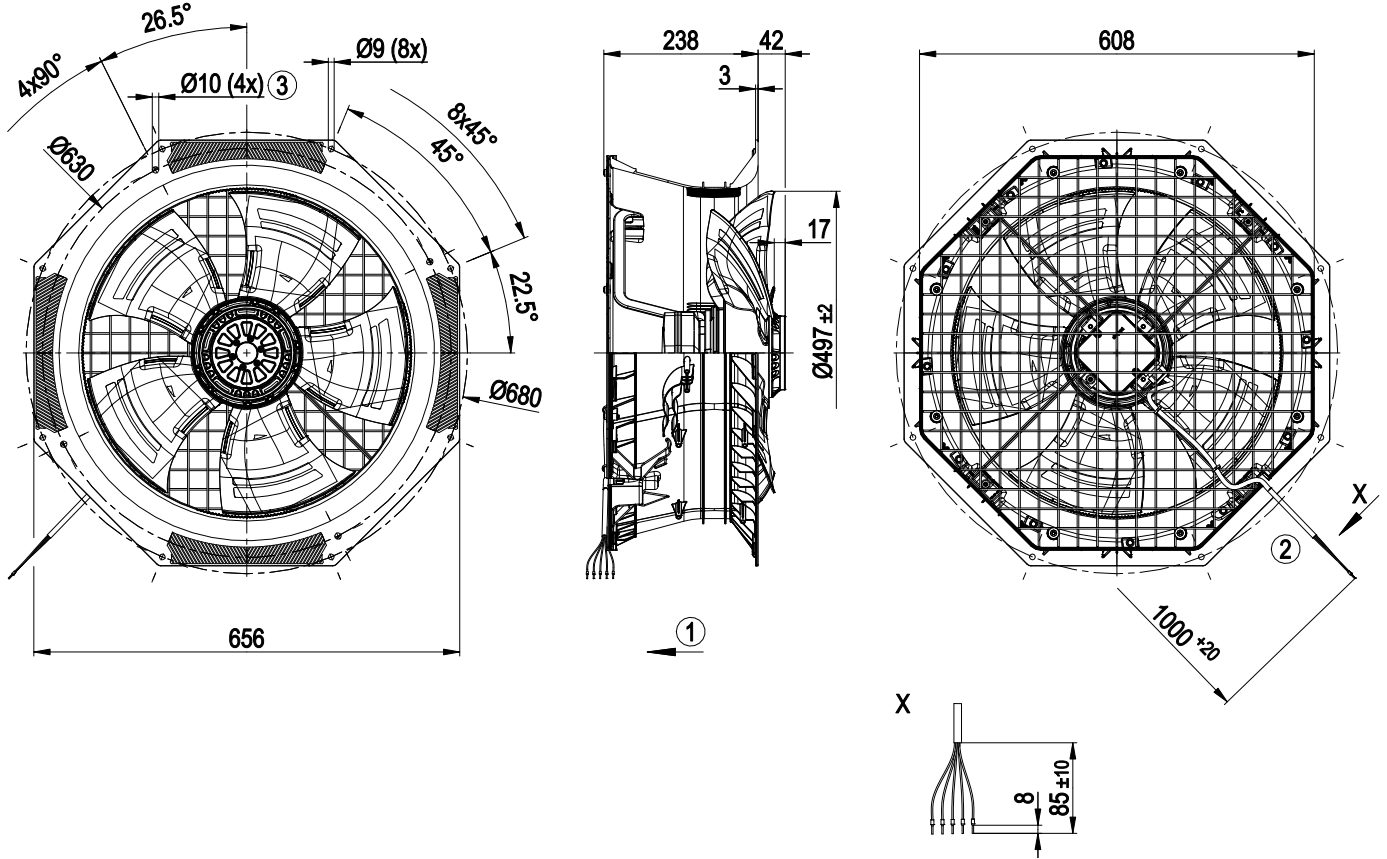


1	Airflow direction "V"
2	Cable silicone 5G 0.5 mm <sup>2</sup> , 5x crimped ferrules
3	Mounting holes for FlowGrid




# AC axial fan

sickle-shaped blades (S series)  
with integrated diffuser

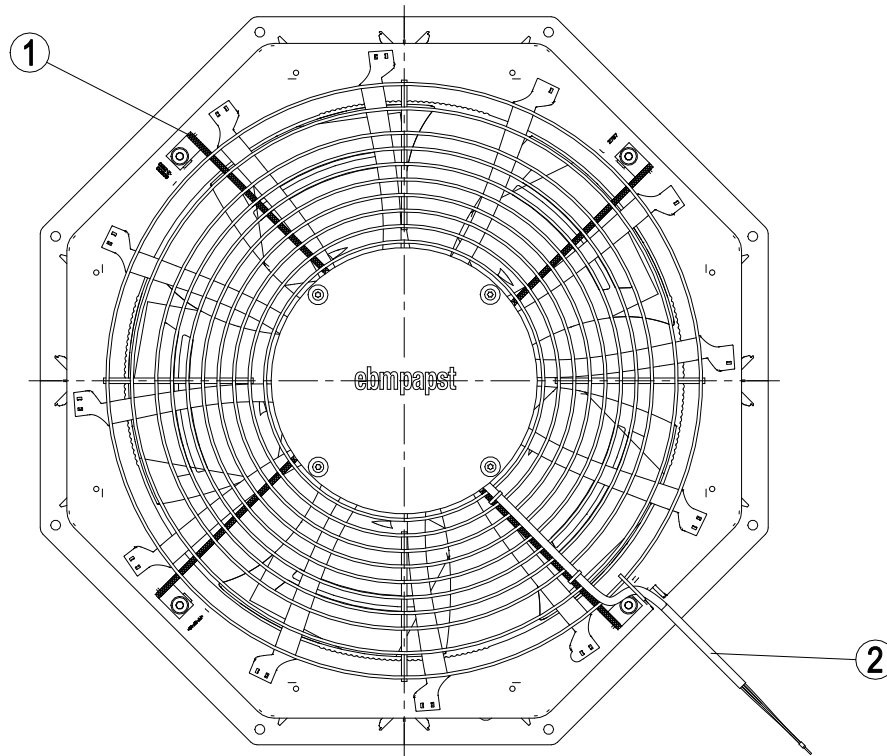

- |   |   |
|---|---|
| 1 | Installation position: Shaft horizontal (install support struts only in X-position as illustrated) or rotor on bottom |
| 2 | For horizontal shaft installation position, the cable exit must be at the bottom right.                               |

## Connection diagram




L	= U1 = blue
N	= U2 = black
PE	green/yellow
TW	Thermal overload protector gray (2x)



# AC axial fan

sickle-shaped blades (S series)  
with integrated diffuser

## Curves: Air performance 50 Hz

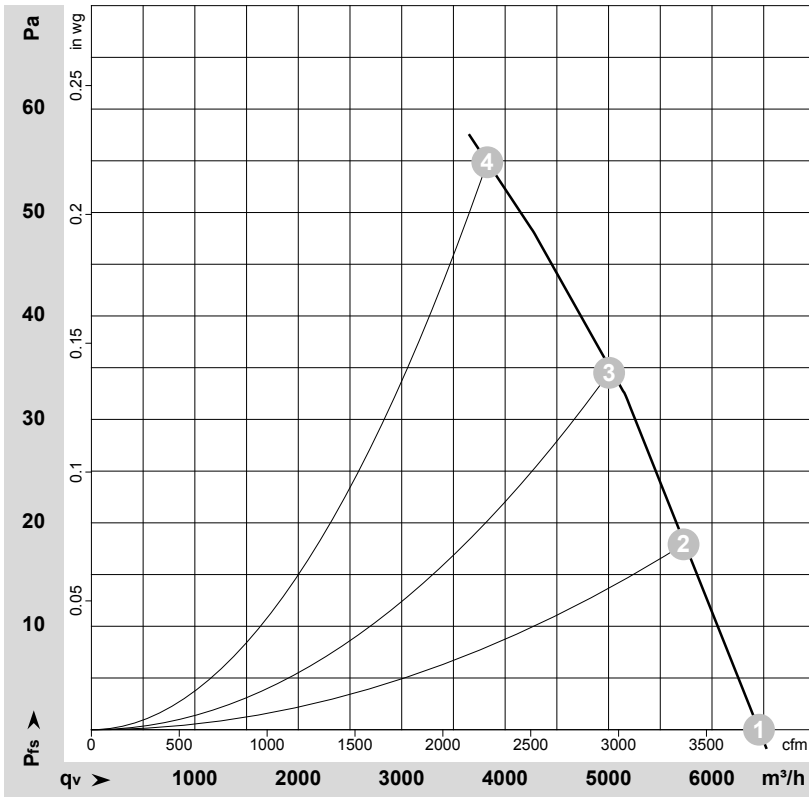

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-181653-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	230	50	920	166	0.73	61	69	71	6455	0	3800	0.00
2	230	50	900	183	0.80	58	66	67	5725	18	3370	0.07
3	230	50	885	199	0.87	57	63	65	5005	35	2945	0.14
4	230	50	860	215	0.95	55	64	66	3825	55	2250	0.22


U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase



# AC axial fan

sickle-shaped blades (S series)  
with integrated diffuser

## Curves: Air performance 60 Hz

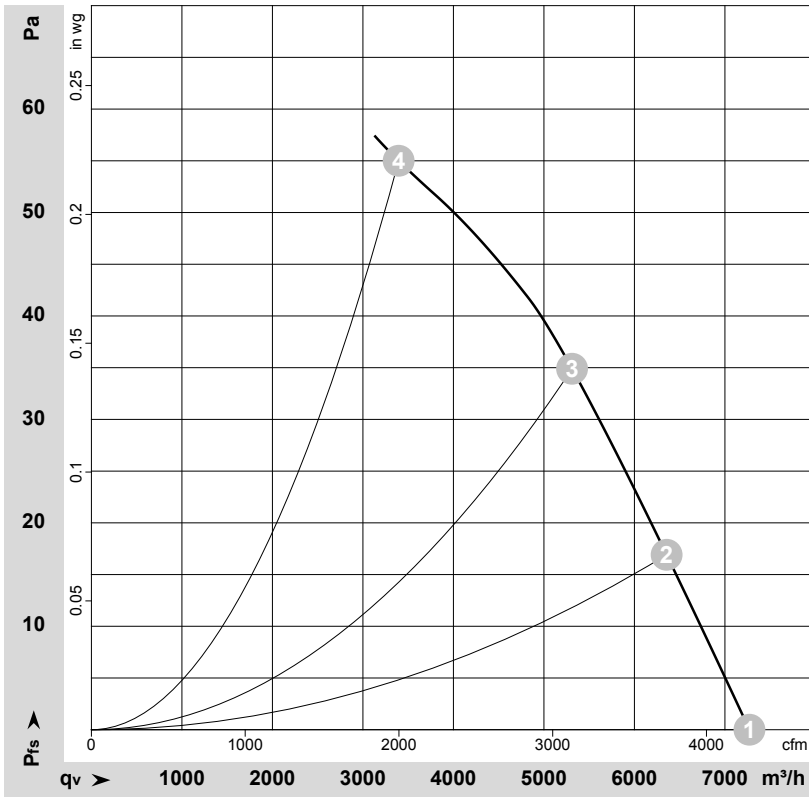

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-181729-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	230	60	1030	243	1.06	62	69	70	7270	0	4280	0.00
2	230	60	980	258	1.13	60	67	68	6355	17	3740	0.07
3	230	60	925	275	1.20	57	64	65	5310	35	3125	0.14
4	230	60	830	290	1.30	54	62	63	3395	55	2000	0.22

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

