

W8D630-KN01-01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W8D630-KN01-01			
Motor	M8D110-GF			
Phase		3~	3~	3~
Nominal voltage	VAC	400	400	480
Connection		Δ	Δ	Δ
Frequency	Hz	50	60	60
Type of data definition		ml	ml	ml
Valid for approval / standard		CE	CE	CE
Speed (rpm)	min ⁻¹	670	730	780
Power input	W	305	390	460
Current draw	A	0.85	0.85	0.9
Max. back pressure	Pa	70	80	90
Min. ambient temperature	°C	-40	-40	-40
Max. ambient temperature	°C	20	20	20

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011

		Actual	Request 2015
01 Overall efficiency η_{es}	%	31.9	30.4
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		41.5	40
05 Variable speed drive		No	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_e	kW	0.3
09 Air flow q_v	m ³ /h	5015
09 Pressure increase p_{fs}	Pa	70
10 Speed (rpm) n	min ⁻¹	670
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-178152




Technical features

Mass	18.84 kg
Size	630 mm
Motor size	110
Surface of rotor	Coated in black
Material of terminal box	PP plastic
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of wall ring	PP plastic
Streamer material	PP plastic
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of air flow	V
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP54
Insulation class	"F"
Humidity (F) / environmental protection class (H)	H2
Note ambient temperature	If there is a risk of ice formation, the fan is only to be operated with a heating tape in the wall ring. Contact ebm-papst for more details. As a fan for use with industrial evaporators, suitable for ambient temperatures between -40°C and +20°C, occasional start-up at up to +40°C permissible.
Max. permissible ambient motor temp. (transp./ storage)	+70 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	See fitting instructions
Condensation drainage holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing with anti-freezing grease
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	≤ 3.5 mA
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; EN 60034-1; CE
Approval	VDE; EAC

Product drawing

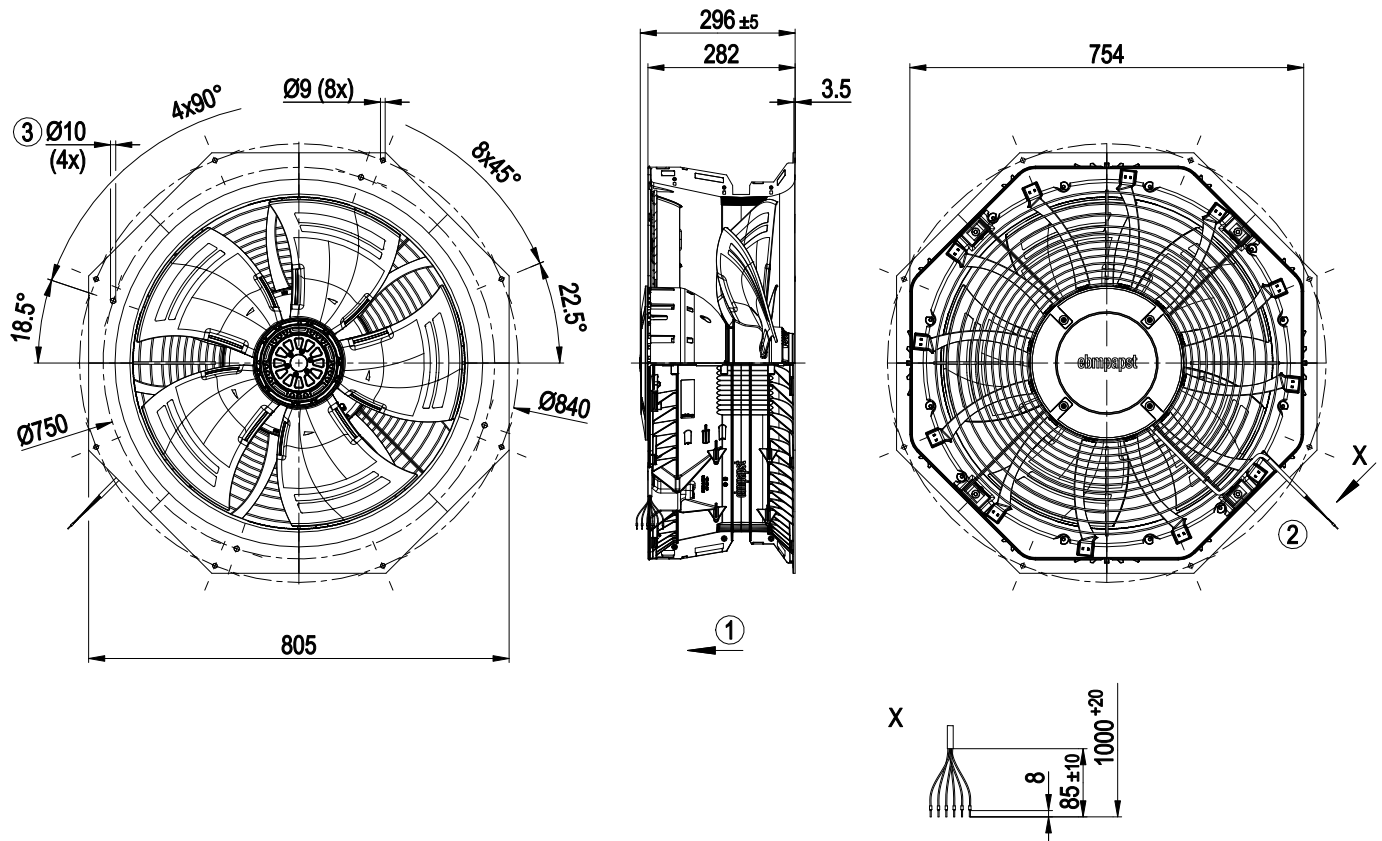


1	Direction of air flow "V"
2	Connection line silicone 6G 0.5 mm ² , 6x crimped core-end sleeves
3	Mounting holes for FlowGrid

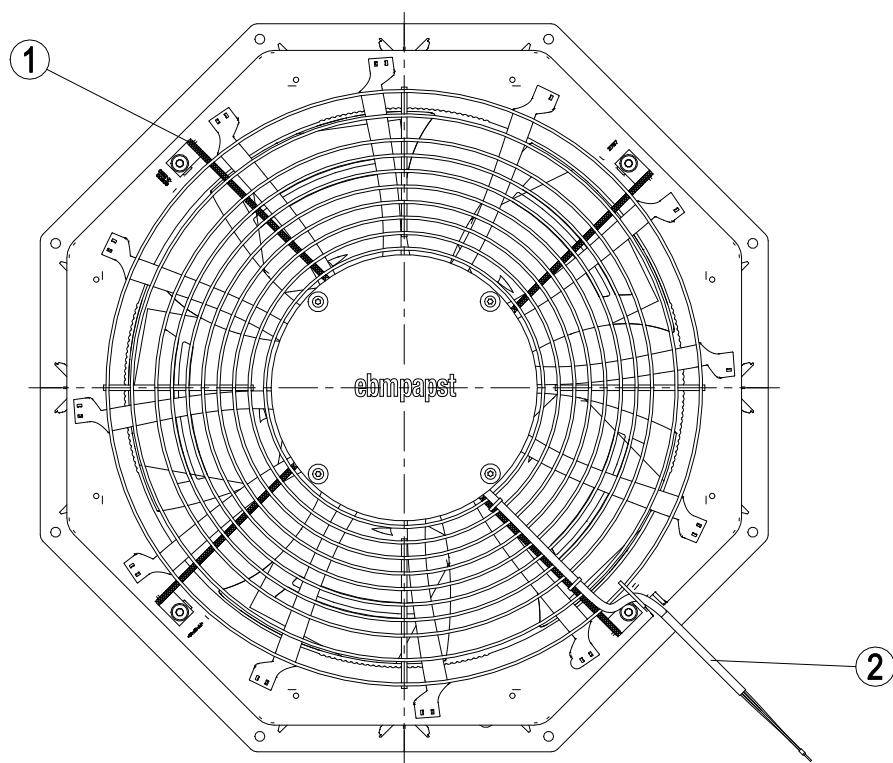

- | | |
|---|---|
| 1 | Installation position: shaft horizontal (install the support struts in X-position only as shown in illustration) or rotor on bottom |
| 2 | Cable exit must be at bottom right when shaft is installed in horizontal position. |

Connection screen

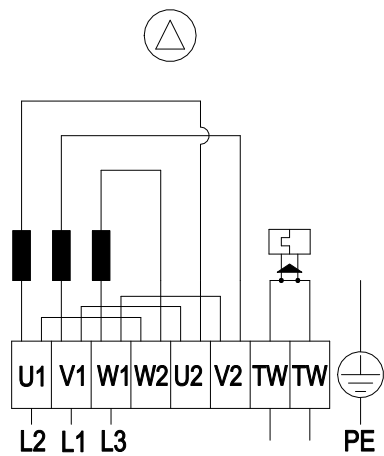


Three-phase motor equipped with TOP
Change in direction of rotation by reversing two phases

Δ	Delta connection
L1	blue
L2	black
L3	brown
TW	Thermal overload protector grey (2x)
PE	green/yellow



AC axial fan - AxiCool
sickled blades (S series)

Charts: Air flow 50 Hz

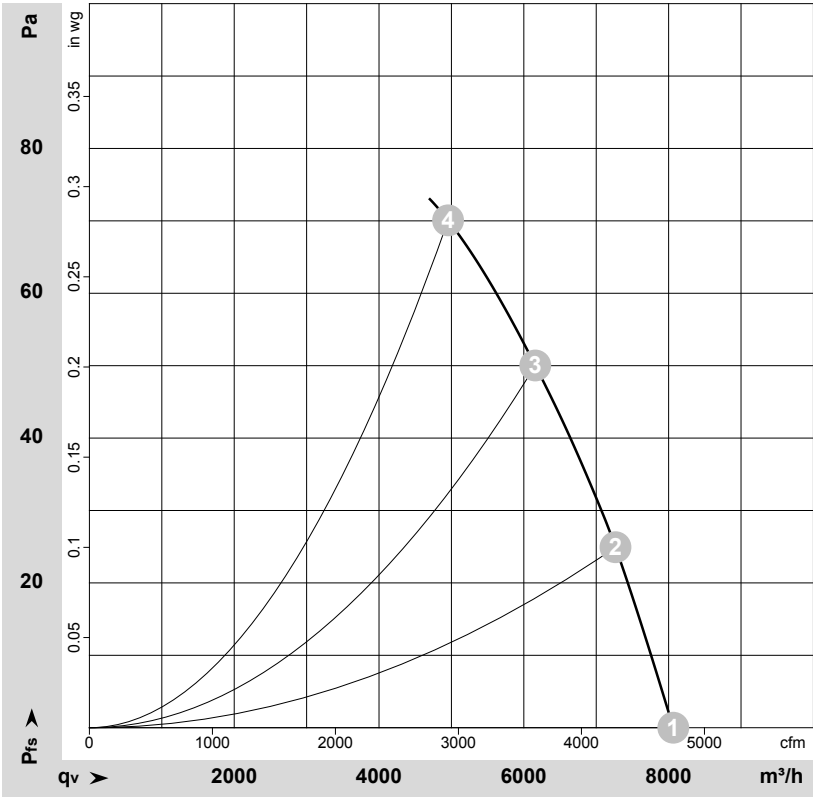

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-178152-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values


	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	Δ	400	50	695	249	0.79	59	65	66	8065	0	4745	0.00
2	Δ	400	50	685	272	0.80	56	63	64	7265	25	4275	0.10
3	Δ	400	50	675	292	0.80	55	61	62	6160	50	3625	0.20
4	Δ	400	50	670	305	0.85	56	63	64	4955	70	2915	0.28

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase



AC axial fan - AxiCool
sickled blades (S series)

Charts: Air flow 60 Hz

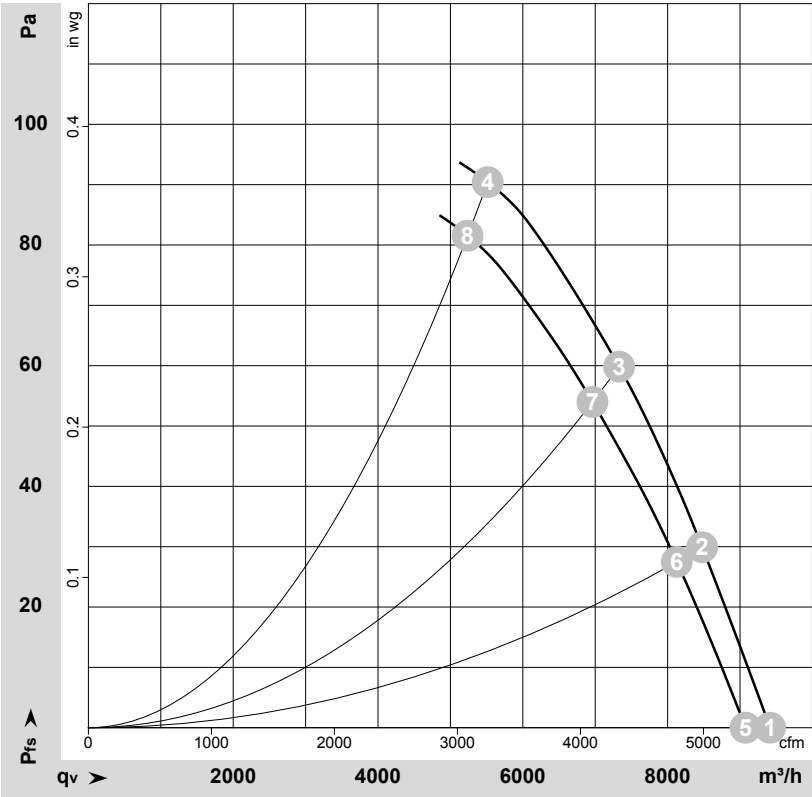

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-181609-1
Measurement: LU-172286-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	Δ	480	60	810	370	0.81	62	69	70	9415	0	5540	0.00
2	Δ	480	60	800	406	0.83	60	67	68	8475	30	4990	0.12
3	Δ	480	60	785	436	0.86	57	65	66	7330	60	4315	0.24
4	Δ	480	60	780	460	0.90	60	67	68	5515	90	3245	0.36
5	Δ	400	60	785	311	0.74	62	69	70	9075	0	5340	0.00
6	Δ	400	60	765	344	0.78	59	66	67	8125	29	4785	0.12
7	Δ	400	60	745	370	0.81	57	64	65	6965	54	4100	0.22
8	Δ	400	60	730	390	0.85	59	66	67	5235	80	3080	0.32

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

