

# AC axial fan

sickle-shaped blades (S series)

with square full nozzle

W8D800-CJ01-80 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Type	W8D800-CJ01-80				
Motor	M8D138-LA				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	400	400	480	480
Wiring		$\Delta$	Y	$\Delta$	Y
Frequency	Hz	50	50	60	60
Method of obtaining data		fa	fa	fa	fa
Valid for approval/standard		CE	CE	CE	CE
Speed (rpm)	min <sup>-1</sup>	695	585	815	640
Power consumption	W	690	465	1070	680
Current draw	A	2.15	0.99	2.33	1.2
Max. back pressure	Pa	105	57	65	35
Max. back pressure	inH <sub>2</sub> O	0.42	0.23	0.26	0.14
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	65	65	60	60
Starting current	A	6.0	2.0	6.6	2.2

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	33.4	33.4	09 Power consumption $P_e$	kW	0.89
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	12045
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	85
04 Efficiency grade N		40	40	10 Speed (rpm) n	min <sup>-1</sup>	675
05 Variable speed drive		No		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 

LU-71660



# AC axial fan

sickle-shaped blades (S series)

with square full nozzle

## Technical description


<b>Weight</b>	46.8 kg
<b>Fan size</b>	800 mm
<b>Rotor surface</b>	Painted black
<b>Terminal box material</b>	Die-cast aluminum, painted black
<b>Blade material</b>	Die-cast aluminum, painted black
<b>Fan housing material</b>	Sheet steel, galvanized and coated with white aluminum plastic (RAL 9006)
<b>Guard grille material</b>	Steel, coated with white-aluminum plastic (RAL 9006)
<b>Number of blades</b>	5
<b>Blade pitch</b>	0°
<b>Airflow direction</b>	"A"
<b>Direction of rotation</b>	Counterclockwise, viewed toward rotor
<b>Degree of protection</b>	IP54
<b>Insulation class</b>	"F"
<b>Moisture (F) / Environmental (H) protection class</b>	F4-2
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	Shaft horizontal or rotor on top; rotor on bottom on request
<b>Condensation drainage holes</b>	On stator side
<b>Motor bearing</b>	Ball bearing
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical hookup</b>	Via terminal box
<b>Motor protection</b>	Thermal overload protector (TOP) with basic insulation
<b>With cable</b>	Axial
<b>Protection class</b>	I (with customer connection of protective earth)
<b>Conformity with standards</b>	EN 60034-1 (2010); EN 61800-5-1; CE
<b>Approval</b>	VDE; EAC



# AC axial fan

sickle-shaped blades (S series)  
with square full nozzle

## Product drawing

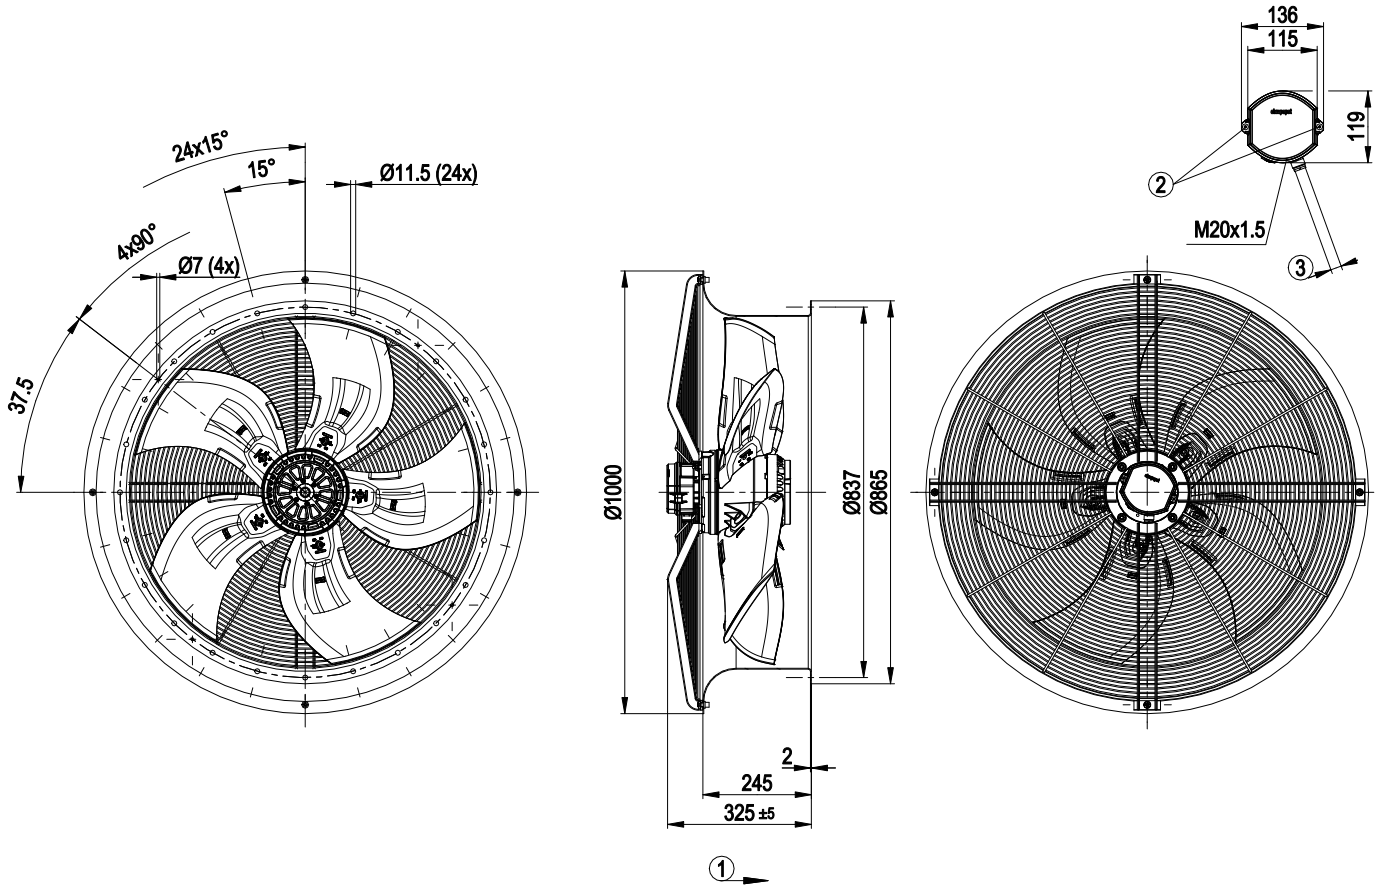


1	Direction of air flow "A"
2	Tightening torque $2.5 \pm 0.4$ Nm
3	Cable diameter: min. 10 mm, max. 12 mm, tightening torque $4 \pm 0.4$ Nm



# AC axial fan

sickle-shaped blades (S series)  
with square full nozzle

## Connection diagram

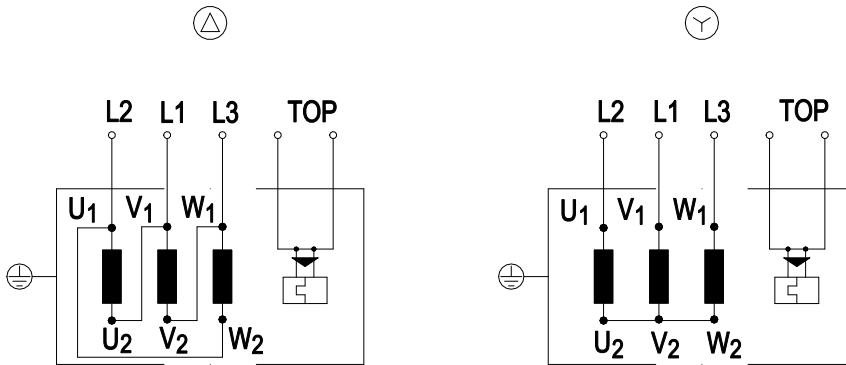

Change of rotation direction by reversing two phases

Δ	Delta connection	Y	Star connection	L2	= U1 = black
L1	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x gray
PE	green/yellow				




# AC axial fan

sickle-shaped blades (S series)

with square full nozzle

## Curves: Air performance 50 Hz

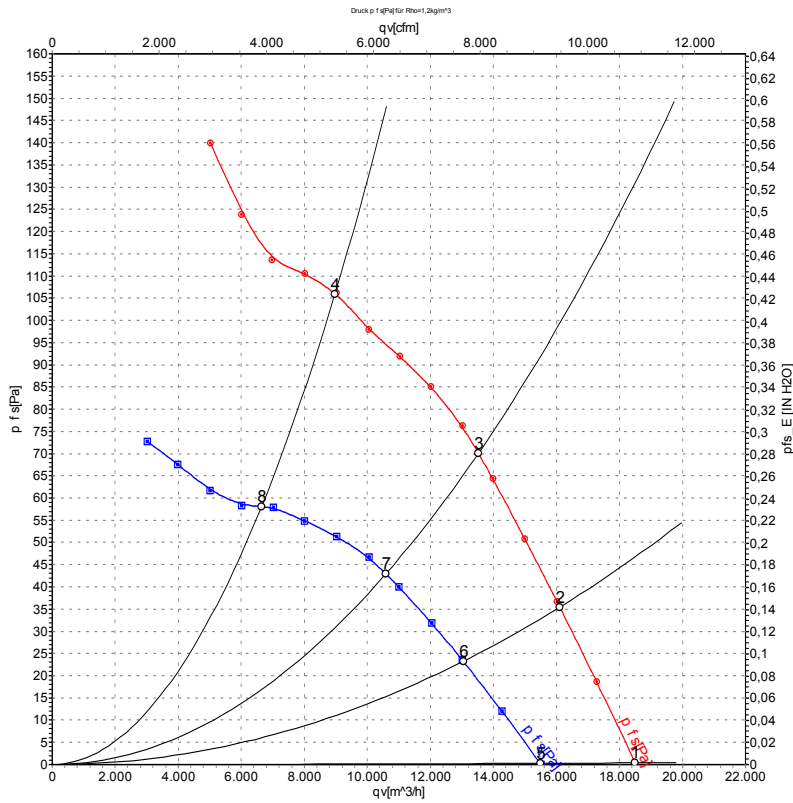

Measurement: LU-100471-1  
Measurement: LU-100473-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	Pe	I	LpA <sub>in</sub>	LwA <sub>in</sub>	qv	P <sub>fs</sub>	qv	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	Δ	400	50	695	690	2.15	62	67	18520	0	10900	0.00
2	Δ	400	50	685	775	2.21	61	67	16100	35	9475	0.14
3	Δ	400	50	680	846	2.26	61	67	13530	70	7965	0.28
4	Δ	400	50	660	980	2.41	65	72	8975	105	5280	0.42
5	Y	400	50	585	465	0.99	59	64	15520	0	9135	0.00
6	Y	400	50	555	509	1.08	57	63	13040	23	7675	0.09
7	Y	400	50	535	535	1.13	56	62	10580	43	6225	0.17
8	Y	400	50	515	570	1.21	58	65	6645	57	3910	0.23

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · Pe = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
qv = Air flow · P<sub>fs</sub> = Pressure increase




# AC axial fan

sickle-shaped blades (S series)

with square full nozzle

## Curves: Air performance 60 Hz

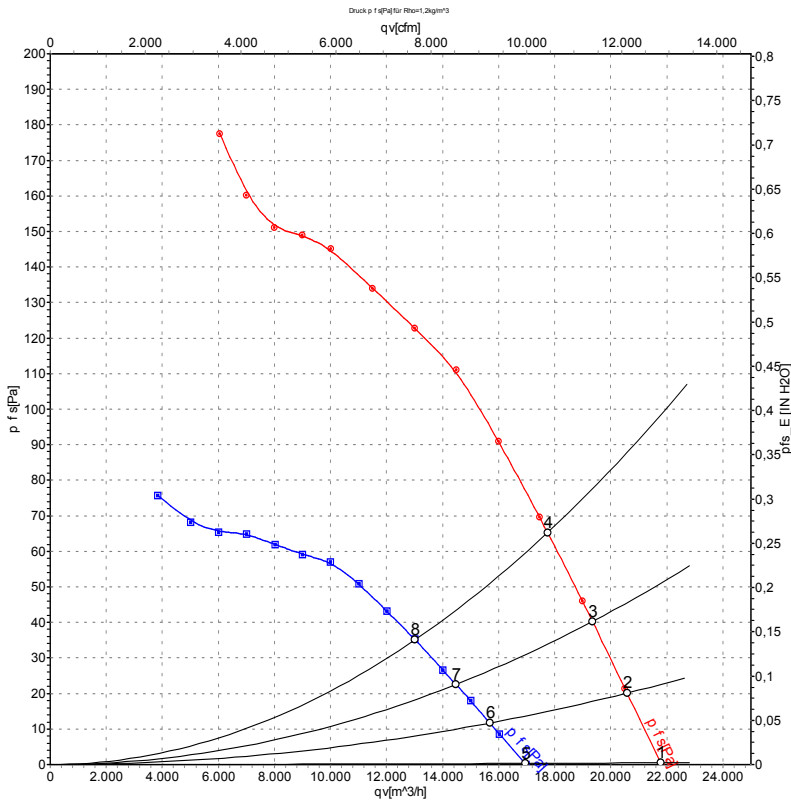

Measurement: LU-101195-1  
Measurement: LU-101199-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	Pe	I	LpA <sub>in</sub>	LwA <sub>in</sub>	qv	Pfs	qv	Pfs
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	Δ	480	60	815	1070	2.33	64	71	21820	0	12845	0.00
2	Δ	480	60	810	1134	2.40	64	70	20580	20	12115	0.08
3	Δ	480	60	805	1193	2.45	63	70	19350	40	11390	0.16
4	Δ	480	60	790	1250	2.53	63	70	17750	65	10445	0.26
5	Y	480	60	640	680	1.20	60	66	16980	0	9995	0.00
6	Y	480	60	620	702	1.24	59	65	15690	12	9235	0.05
7	Y	480	60	605	719	1.27	58	64	14480	22	8525	0.09
8	Y	480	60	580	740	1.30	57	64	13020	35	7665	0.14

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · Pe = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
qv = Air flow · Pfs = Pressure increase

