

AC axial fan

sickle-shaped blades (S series)
with round full nozzle, Transformer fan

WZD800-CM07-84 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	WZD800-CM07-84				
Motor	MZD138-HF				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	240	240	415	415
Wiring		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Method of obtaining data		fa	fa	fa	fa
Valid for approval/standard		-	-	-	-
Speed	min ⁻¹	465	530	465	530
Power consumption	W	300	350	300	350
Current draw	A	1.94	1.7	1.12	0.98
Max. back pressure	Pa	44	54	44	54
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	75	80	75	80
Starting current	A	4.2	3.7	2.4	2.15

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC axial fan

sickle-shaped blades (S series)
with round full nozzle, Transformer fan

Technical description


Weight	42.9 kg
Fan size	800 mm
Rotor surface	Painted black
Terminal box material	Die-cast aluminum, painted black
Blade material	Die-cast aluminum, painted black
Fan housing material	Sheet steel, galvanized and coated with white aluminum plastic (RAL 9006)
Guard grille material	Steel, galvanized and coated with white-aluminum plastic (RAL 9006)
Number of blades	5
Blade pitch	0°
Airflow direction	"A"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F4-2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	On stator side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Via terminal box
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; EN 60034-1 (2010)
Approval	EAC; VDE



AC axial fan

sickle-shaped blades (S series)
with round full nozzle, Transformer fan

Product drawing

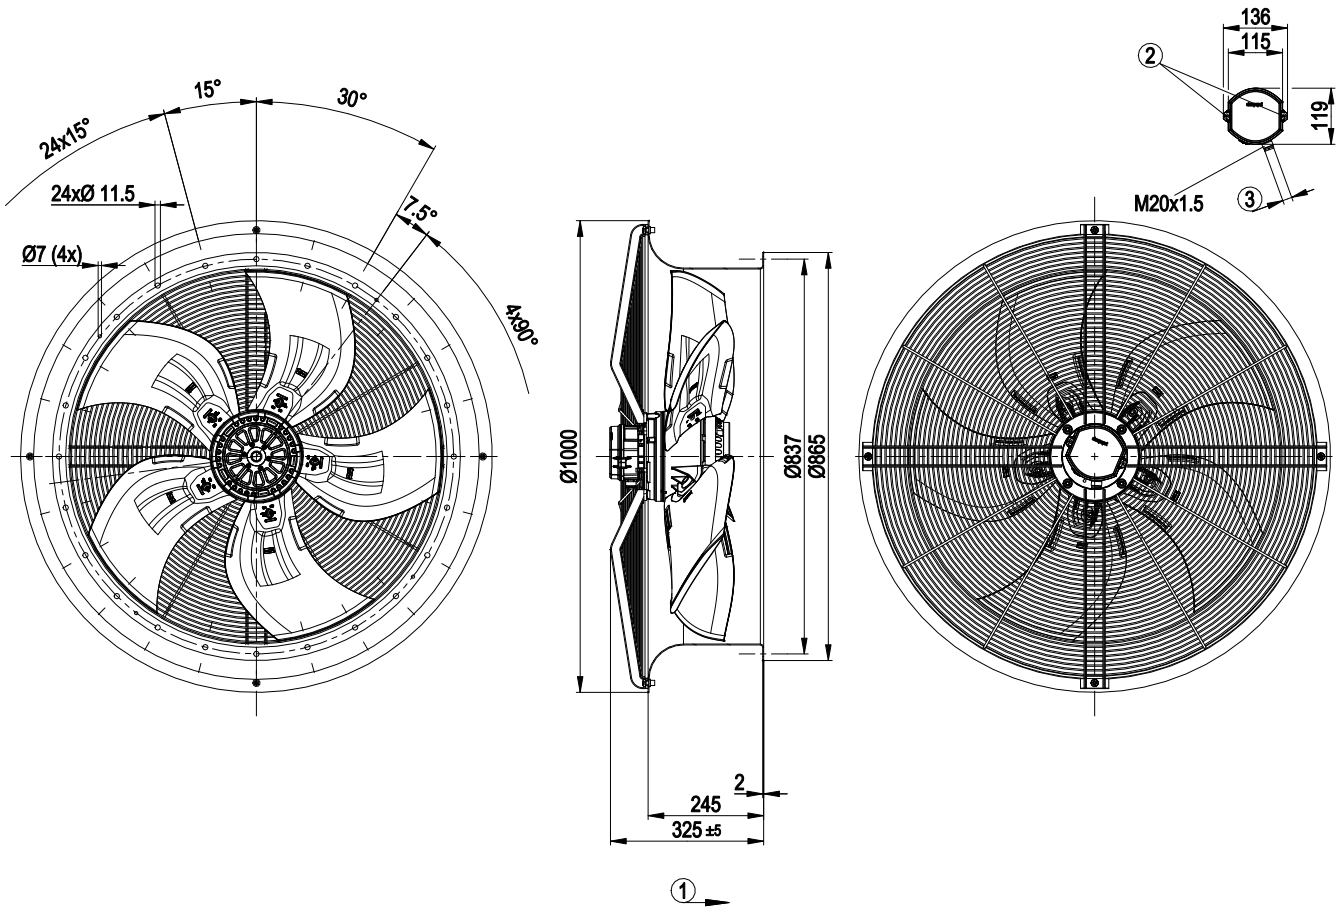


1	Direction of air flow "A"
2	Tightening torque $2.5 \text{ Nm} \pm 0.4 \text{ Nm}$
3	Cable diameter: min. 10 mm, max. 12 mm, tightening torque $4 \pm 0.4 \text{ Nm}$



AC axial fan

sickle-shaped blades (S series)
with round full nozzle, Transformer fan

Connection diagram

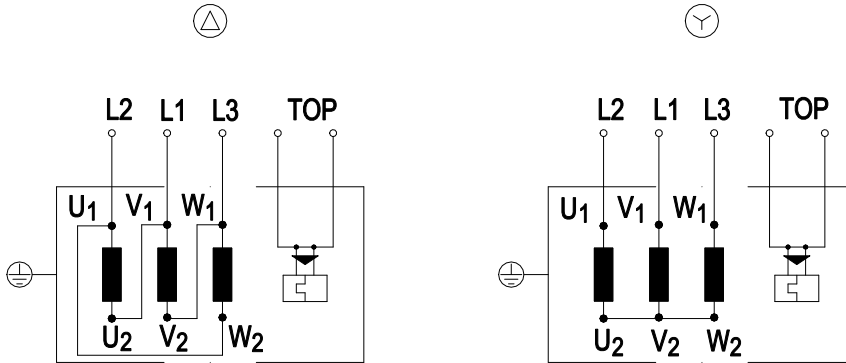

Change of rotation direction by reversing two phases


Δ	Delta connection	Y	Star connection	L2	= U1 = black
L1	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x gray
PE	green/yellow				



AC axial fan

sickle-shaped blades (S series)
with round full nozzle, Transformer fan

Curves: Air performance 50 Hz

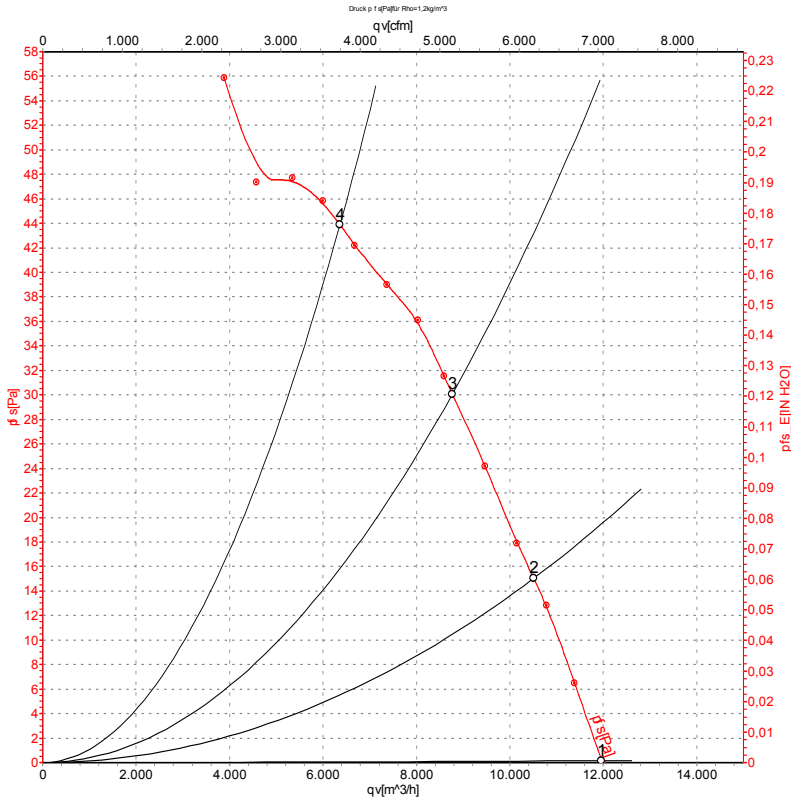

Measurement: LU-113871-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa
1	Y	415	50	465	300	1.12	56	62	60	11980	0
2	Y	415	50	460	326	1.14	55	60	59	10510	15
3	Y	415	50	455	346	1.14	55	61	60	8770	30
4	Y	415	50	445	376	1.15	56	63	63	6360	44


Wired = Wiring · U = Power supply · f = Frequency · n = Speed · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase



AC axial fan

sickle-shaped blades (S series)
with round full nozzle, Transformer fan

Curves: Air performance 60 Hz

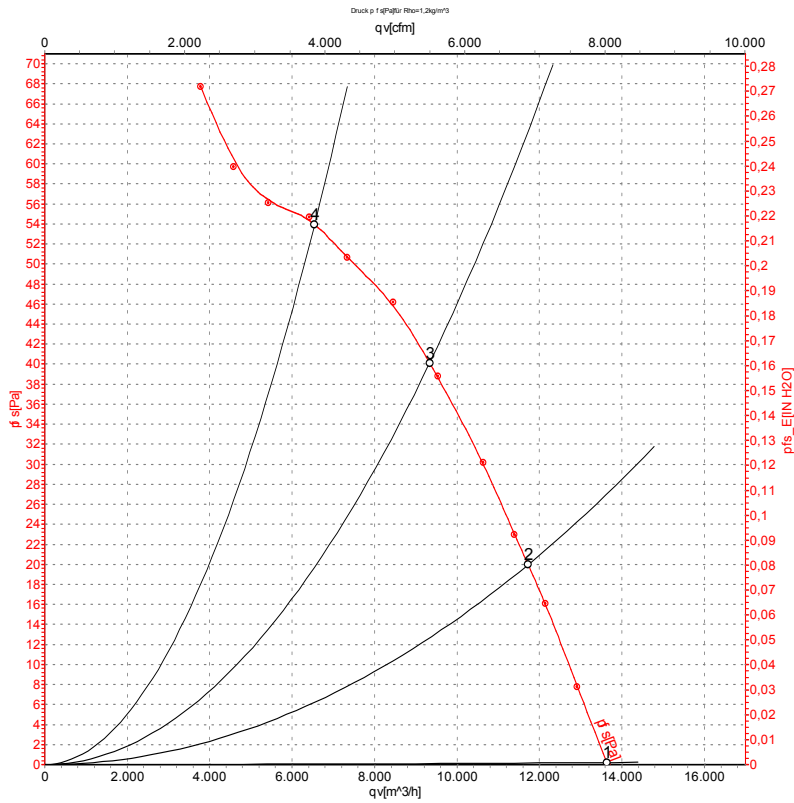

Measurement: LU-113891-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa
1	Y	415	60	530	350	0.98	58	64	62	13650	0
2	Y	415	60	515	391	1.04	57	62	61	11730	20
3	Y	415	60	505	422	1.07	58	64	63	9335	40
4	Y	415	60	485	465	1.13	59	66	66	6545	54

Wired = Wiring · U = Power supply · f = Frequency · n = Speed · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase

