

AC axial fan - HyBlade

sickled blades (S series)
with full square nozzle

WZD800-GG03-13 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	WZD800-GG03-13				
Motor	MZD138-HF				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	400	400	480	480
Connection		Δ	Y	Δ	Y
Frequency	Hz	50	50	60	60
Type of data definition		ml	ml	ml	ml
Valid for approval / standard		-	-	-	-
Speed (rpm)	min ⁻¹	435	340	510	370
Power input	W	360	200	520	270
Current draw	A	1.12	0.47	1.2	0.54
Max. back pressure	Pa	40	23	52	27
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	70	70	65	65
Starting current	A	2.2		2.2	

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Technical features

Mass	39.6 kg
Size	800 mm
Surface of rotor	Cast in aluminium
Material of terminal box	PP plastic
Material of blades	Aluminium sheet insert, sprayed with PP plastic
Material of wall ring	Sheet steel, pre-galvanised and plastic-coated in pebble-grey (RAL 7032)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	0°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	On rotor and stator sides
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; EN 60034
Approval	EAC; VDE




AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Product drawing

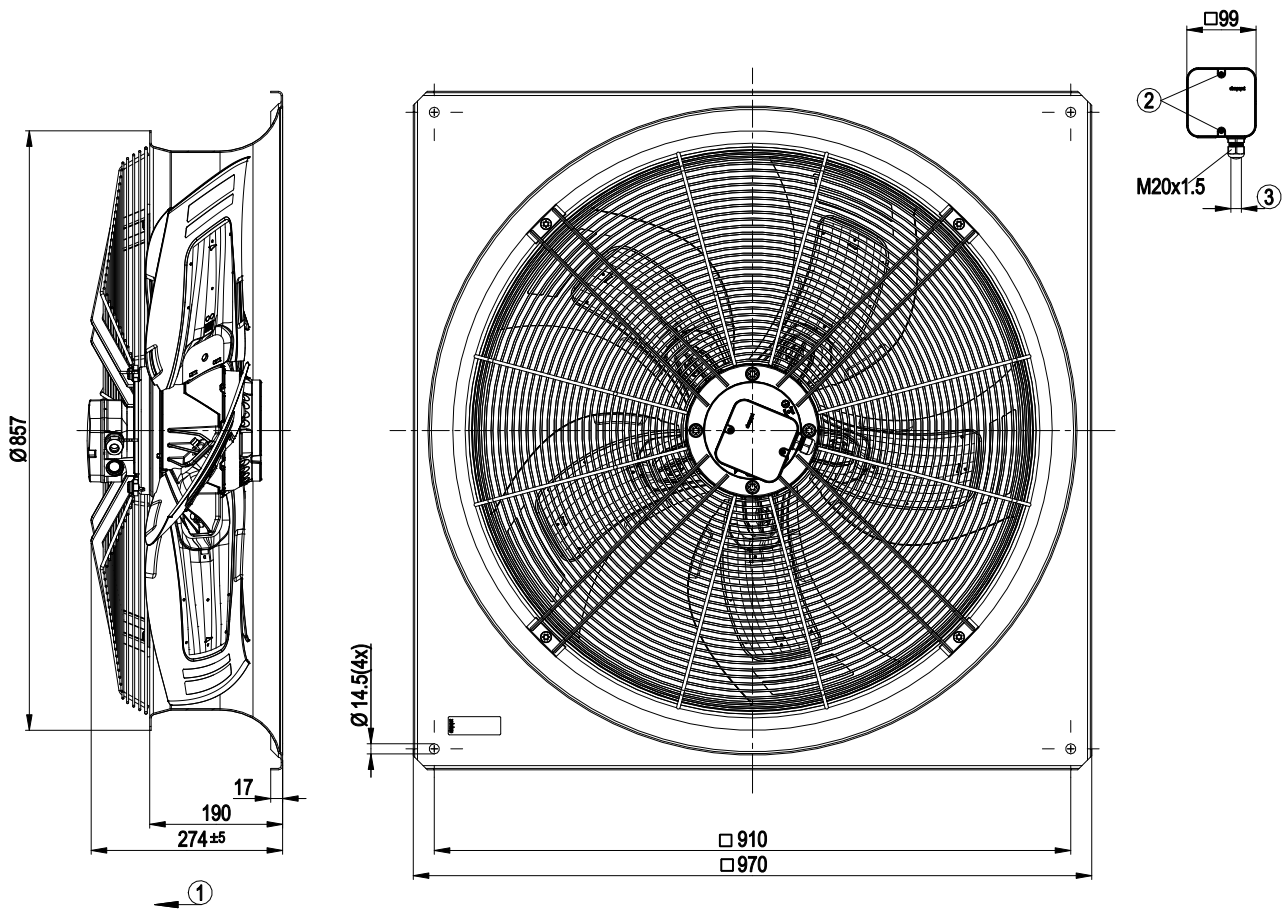


1	Direction of air flow "V"
2	Tightening torque 1.5 ± 0.2 Nm
3	Cable diameter: min. 7 mm, max. 14 mm, tightening torque: 2 ± 0.30 Nm

AC axial fan - HyBlade

sickled blades (S series)
with full square nozzle


Connection screen

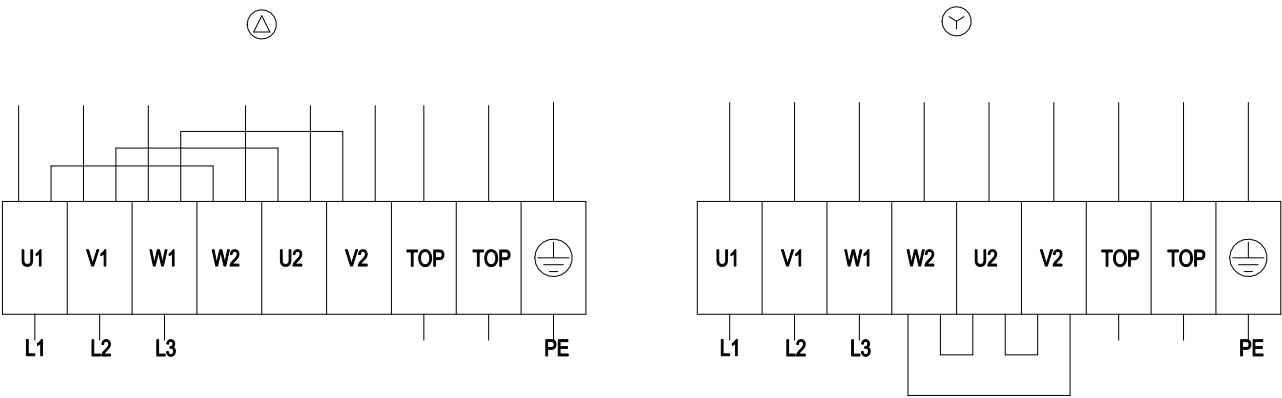

Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				



Charts: Air flow 50 Hz

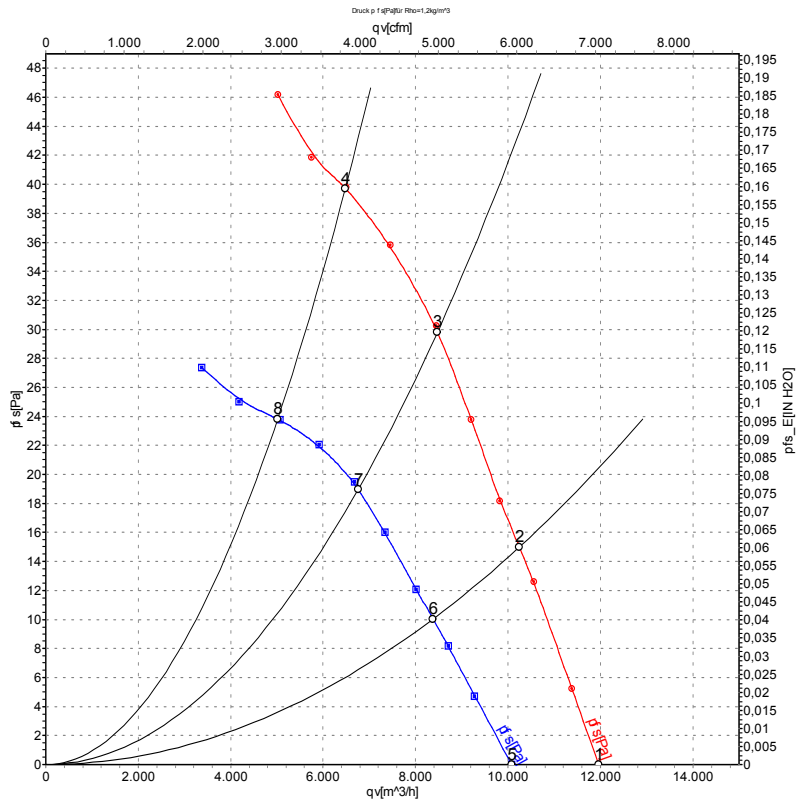

Measurement: LU-115875-1
Measurement: LU-115886-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	CFM	inH2O
1	Δ	400	50	460	292	1.09	50	56	55	11960	0	7040	0.00
2	Δ	400	50	450	318	1.09	49	55	54	10250	15	6035	0.06
3	Δ	400	50	445	336	1.10	49	55	55	8470	30	4985	0.12
4	Δ	400	50	435	360	1.12	51	59	58	6480	40	3815	0.16
5	Y	400	50	385	165	0.41	47	53	52	10080	0	5935	0.00
6	Y	400	50	365	179	0.43	45	51	50	8380	10	4930	0.04
7	Y	400	50	355	187	0.45	43	49	49	6760	19	3980	0.08
8	Y	400	50	340	200	0.47	44	52	52	5020	24	2955	0.10


Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase

AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Charts: Air flow 60 Hz

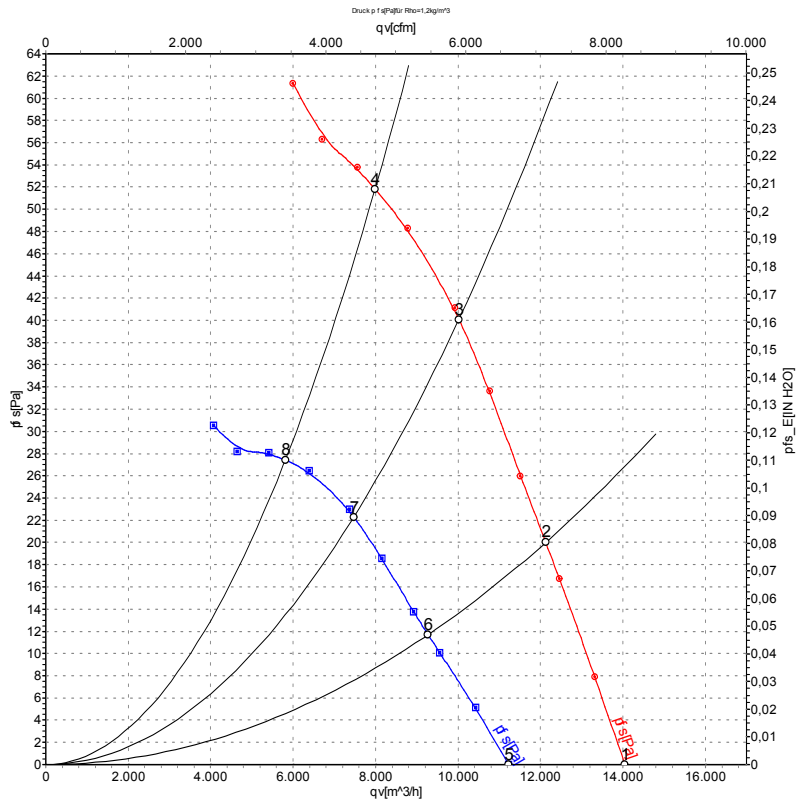

Measurement: LU-115881-1
Measurement: LU-115890-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	L _{pA_{in}}	L _{wA_{in}}	L _{wA_{out}}	qv	p _{fs}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	CFM	inH ₂ O
1	Δ	480	60	540	415	1.13	53	59	59	14050	0	8270	0.00
2	Δ	480	60	530	454	1.16	53	59	58	12130	20	7140	0.08
3	Δ	480	60	520	484	1.17	53	59	59	10020	40	5900	0.16
4	Δ	480	60	510	520	1.20	55	62	62	7990	52	4700	0.21
5	Y	480	60	430	239	0.49	49	55	54	11220	0	6605	0.00
6	Y	480	60	405	254	0.51	47	53	52	9275	12	5460	0.05
7	Y	480	60	385	263	0.52	45	52	51	7470	22	4395	0.09
8	Y	480	60	370	270	0.54	46	53	53	5810	27	3420	0.11

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · L_{pA_{in}} = Sound pressure level inlet side · L_{wA_{in}} = Sound power level inlet side
L_{wA_{out}} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase

