

COMMONWEALTH DC BRUSHLESS FAN

FP-108CX/DC


162x150x38mm URANUS

DESIGN FEATURES


- ***BEARING SYSTEM:** SLEEVE BEARING & BALL BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***HOUSING:** DIE CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**
- ***AVAILABLE RD TYPE FOR ROTOR LOCKED ALARM SIGNAL**



DIMENSIONS:MM

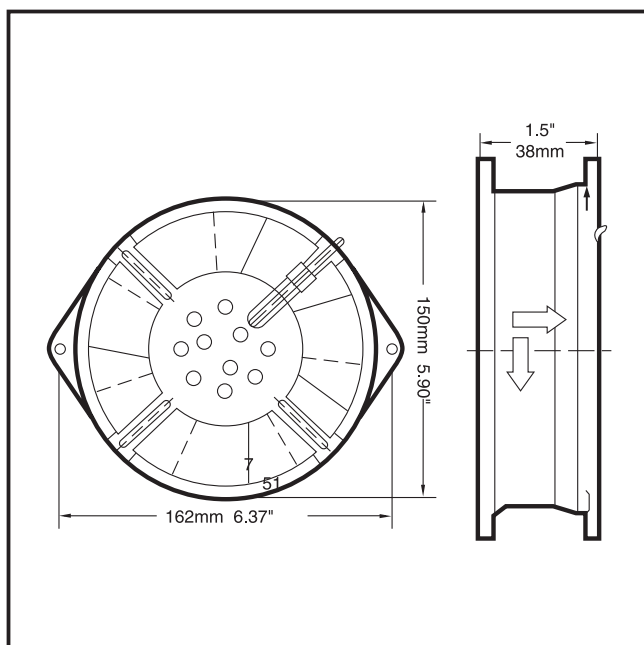

PERFORMANCE

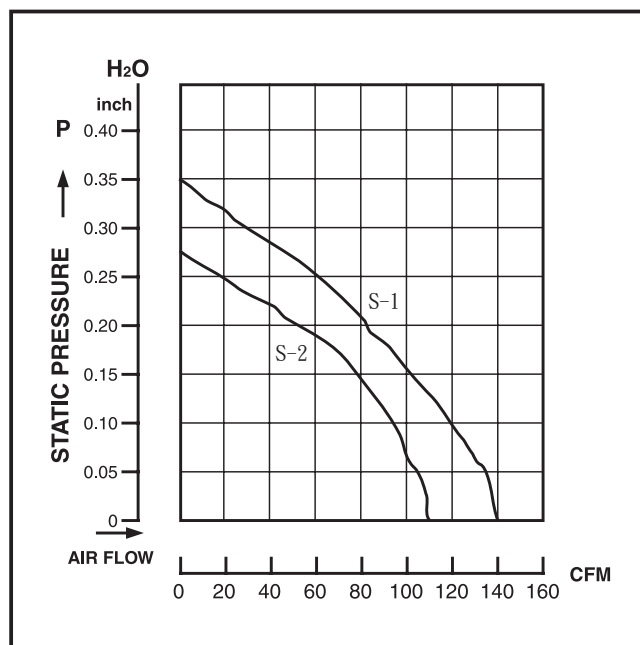

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108CX/DC (S-1)	12	140	4.00	0.75	9.0	2200	0.35	42
	24	140	4.00	0.40	9.60	2200	0.35	42
	48	140	4.00	0.23	11.04	2200	0.35	42
FP-108CX/DC (S-2)	12	110	3.12	0.55	6.60	1800	0.28	38
	24	110	3.12	0.35	8.40	1800	0.28	38
	48	110	3.12	0.19	9.12	1800	0.28	38