

Customer.	HUAWEI		
Description.	DC BLOWER		
Part No.	32030092	REV.	
Delta Model No.	TCA1748ATAGP	REV.	02
Sample Issue No.			
Sample Issue Date.	FEB.05 2016		

DELTA ELECTRONICS, INC.
TAOYUAN PLANT
252, SHANG YING ROAD, KUEI SAN INDUSTRIAL ZONE TAOYUAN
SHIEN, TAIWAN, R.O.C.
TEL:886-(0)3-3591968
FAX:886-(0)3-3591991

*** SAMPLE HISTORY***

DELTA MODEL: TCA1748ATAGP

[illegible]

TCA1748ATAGP Delta Datasheet FansCo

DELTA ELECTRONICS, INC.

252, SHANG YING ROAD, KUEI SAN

TAOYUAN HSIEN 333, TAIWAN, R. O. C.

TEL : 886-(0)3-3591968

FAX : 886-(0)3-3591991

STATEMENT OF DEVIATION

☒ NONE

☐ DESCRIPTION :

TCA1748ATAGP Delta Datesheet FansCo

DELTA ELECTRONICS, INC.

252, SHANG YING ROAD, KUEI SAN
TAOYUAN HSIEN 333, TAIWAN, R. O. C.

TEL : 886-(0)3-3591968

FAX : 886-(0)3-3591991

SPECIFICATION FOR APPROVAL

Customer:	HUAWEI		
Description:	DC BLOWER		
Customer P/N:	32030092	REV:	
Delta Model NO.:	TCA1748ATAGP	Delta safety model NO.:	TCA1748ATAGP
Smample Rev:	02	Issue NO:	
Sample Issue Date:	FEB.05 2016	Quantity:	PCS

1. SCOPE:

THIS SPECIFICATION DEFINES THE ELECTRICAL AND MECHANICAL CHARACTERISTICS OF THE DC BRUSHLESS CENTRIFUGAL BLOWER.

2. CHARACTERS:

ITEM	DESCRIPTION
RATED VOLTAGE	48.0 VDC
OPERATION VOLTAGE	36.0-60.0 VDC
INPUT CURRENT (AVG.)	1.20 A MAX. 2.10 A (AT 51.1V, IN BACK PRESSURE TEST) SAFETY CURRENT ON LABEL : 2.10A
INPUT POWER (AVG)	57.6 W MAX. 120.00 W
SPEED	4000±10% R.P.M.
MAX. AIR FLOW (AT ZERO STATIC PRESSURE)	10.823 (MIN. 9.741) M ³ /MIN. 382.04 (MIN. 343.84) CFM
MAX. AIR PRESSURE (AT ZERO AIRFLOW)	53.70 (MIN. 43.50) mmH ₂ O 2.114 (MIN. 1.713) inchH ₂ O
ACOUSTICAL NOISE (AVG.)	70.8 (AVG.) dB-A
INSULATION TYPE	UL:CLASS A

(continued)

page: 1

A00


TCA1748ATAGP Delta Datasheet FansCo

PART NO: 32030092

DELTA MODEL: TCA1748ATAGP

INSULATION STRENGTH	10 MEG OHM MIN. AT 500 VDC (BETWEEN PILLOW AND (+) TERMINAL)
DIELECTRIC STRENGTH	5 mA MAX. AT 500 VAC 50/60 Hz ONE MINUTE, (BETWEEN PILLOW AND (+) TERMINAL)
LIFE EXPECTANCE (L10) (AT LABEL VOLTAGE)	70,000 HOURS CONTINUOUS OPERATION AT 40 °C WITH 15 ~ 65 %RH.
ROTATION	COUNTERCLOCKWISE VIEW FROM NAME PLATE SIDE
LOCKED ROTOR SHUT DOWN	THE CURRENT WILL SHUT DOWN, WHEN LOCKED ROTOR AND FIXED.

- NOTES:
1. ALL READINGS ARE MEASURED AFTER STABLY WARMING UP THROUGH 10 MINUTES.
 2. STANDARD AIR PROPERTY IS AIR AT (Td) 25°C TEMPERATURE, (RH) 65% RELATIVE HUMIDITY, AND (Pb) 760 mmHg BAROMETRIC PRESSURE.
 3. THE VALUES WRITTEN IN PARENS , (), ARE LIMITED SPEC.
 4. ACOUSTICAL NOISE MEASURING CONDITION:

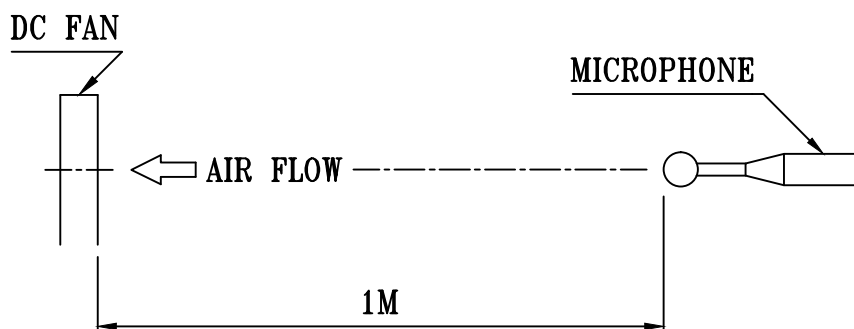

NOISE IS MEASURED AT RATED VOLTAGE IN FREE AIR IN ANECHOIC CHAMBER WITH B & K SOUND LEVEL METER WITH MICROPHONE AT A DISTANCE OF ONE METER FROM THE FAN INTAKE.

TCA1748ATAGP Delta Datasheet FansCo

PART NO: 32030092

DELTA MODEL: TCA1748ATAGP

3. MECHANICAL:

3-1. DIMENSIONS — — — — — SEE DIMENSIONS DRAWING

3-2. PILLOW — — — — — ALUMINUM

3-3. IMPELLER — — — — — PLASTIC BROWN UL: 94V-0

3-4. BEARING SYSTEM — — — — — TWO BALL BEARINGS

3-5. WEIGHT — — — — — 785 GRAMS

3-6. SALT FOG TEST COMPLY — — — — — GR487

3-7. INGRESS PROTECTION RATE — — — — — IP54

4. ENVIRONMENTAL:

4-1. OPERATING TEMPERATURE — — — — — -25 TO +70 DEGREE C

4-2. STORAGE TEMPERATURE — — — — — -40 TO +75 DEGREE C

4-3. OPERATING HUMIDITY — — — — — 5 TO 90 % RH

4-3-1. OPERATING HUMIDITY AT 40 °C — — — — — 5 TO 95 % RH

4-4. STORAGE HUMIDITY — — — — — 5 TO 95 % RH

5. PROTECTION:

5-1. LOCKED ROTOR PROTECTION

IMPEDANCE OF MOTOR WINDING PROTECTS MOTOR FROM FIRE IN 96 HOURS OF LOCKED ROTOR CONDITION AT THE RATED VOLTAGE.

5-2. POLARITY PROTECTION

BE CAPABLE OF WITHSTANDING IF REVERSE CONNECTION FOR POSITIVE AND NEGATIVE LEADS.

6. RE OZONE DEPLETING SUBSTANCES:

6-1. NO CONTAINING PBBs, PBBOs, CFCs, PBBEs, PBDPEs AND HCFCs.


7. PRODUCTION LOCATION

7-1. PRODUCTS WILL BE PRODUCED IN CHINA OR THAILAND.

PART NO: 32030092

DELTA MODEL: TCA1748ATAGP

8. P & Q CURVE:

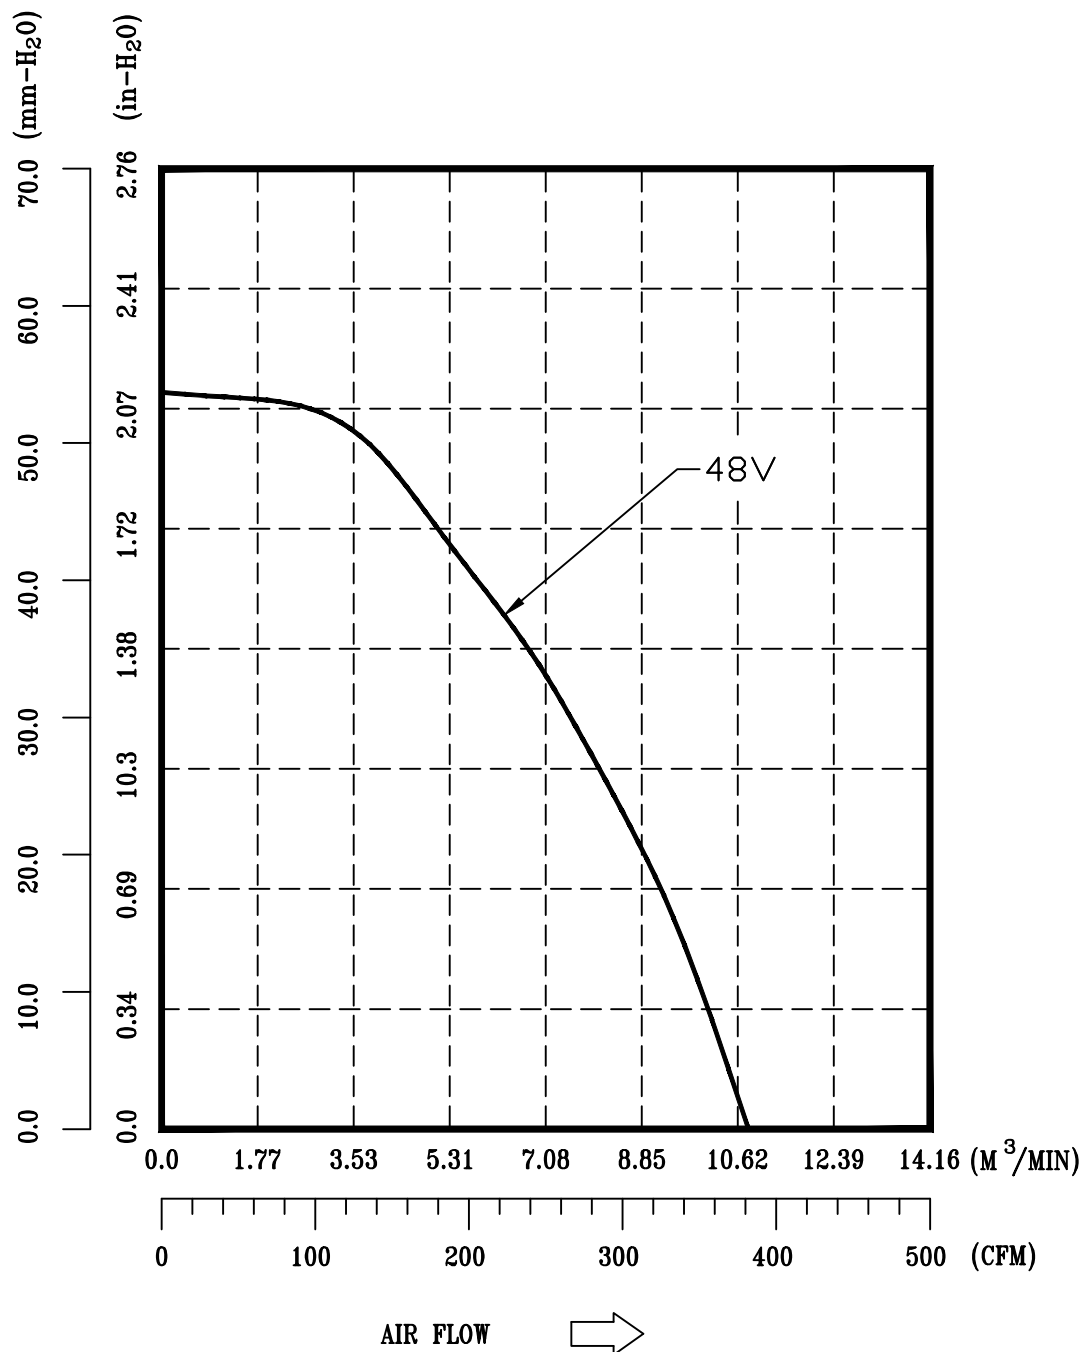

* TEST CONDITION: INPUT VOLTAGE ----- OPERATION VOLTAGE
 TEMPERATURE ----- ROOM TEMPERATURE
 HUMIDITY ----- 65%RH


TCA1748ATAGP Delta Datesheet FansCo

PART NO: 32030092


DELTA MODEL: TCA1748ATAGP

9. DIMENSION DRAWING:



LABEL:



OR



OR

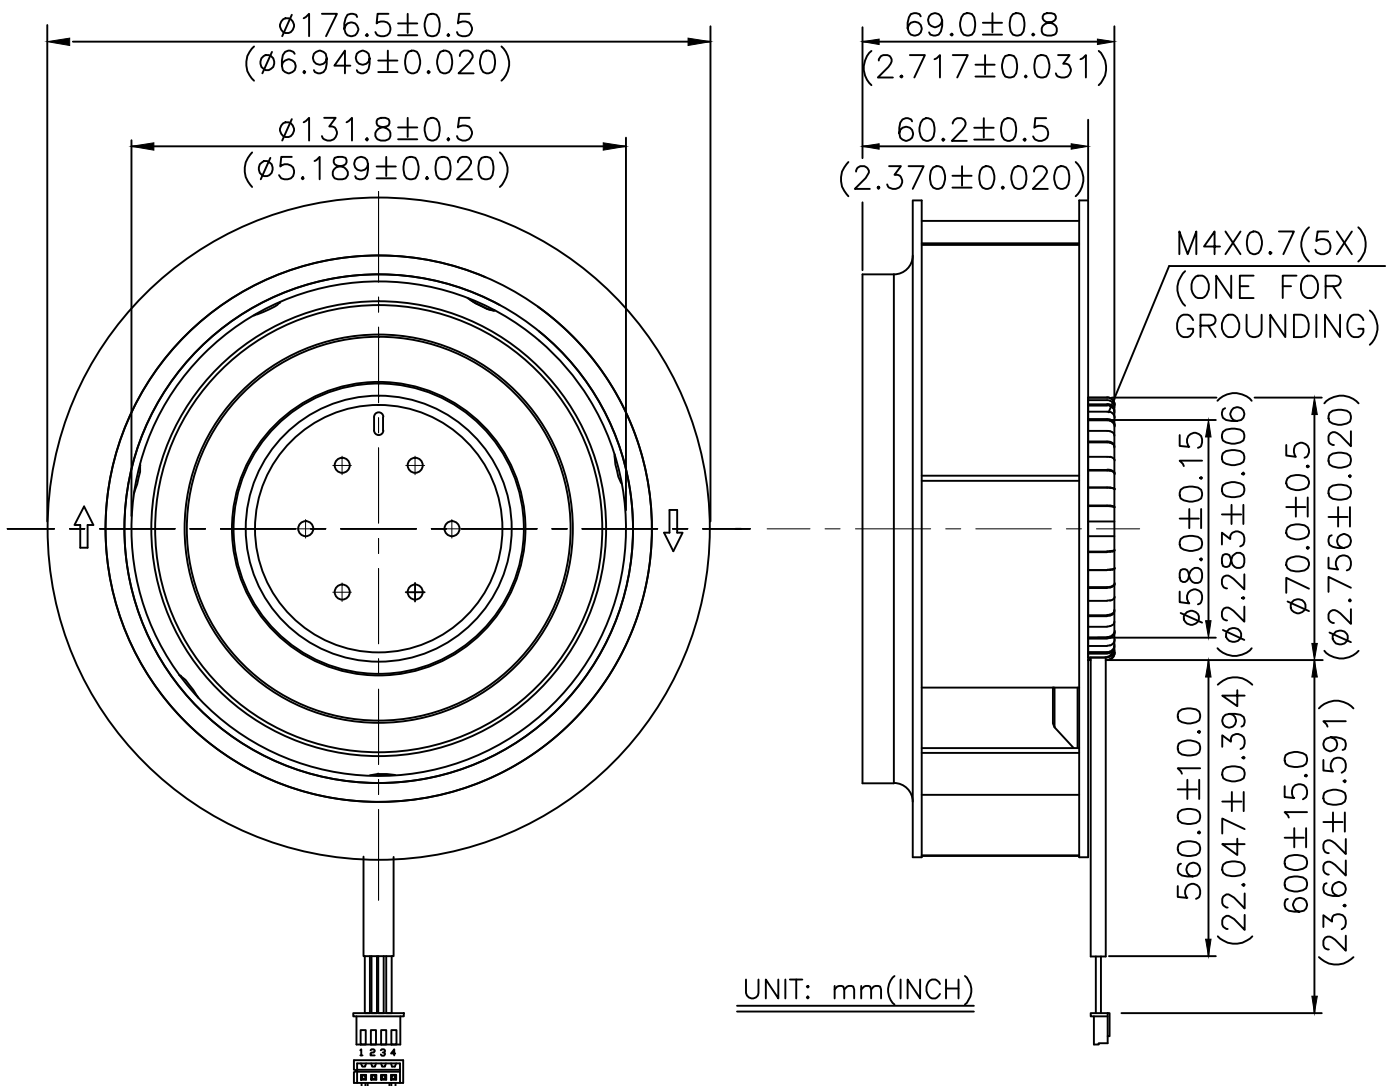

NOTES: 1. CABLE WIRE UL:2464 AWG#22

PIN 1: RED WIRE ----(+)

PIN 2: YELLOW WIRE ----(PWM)

PIN 3: BLUE WIRE ----(F00)

PIN 4: BLACK WIRE ----(-)

2. HOUSING: HST H2500J-04 OR JST XHP-4

3. TERMINAL: HST T2500J OR JST SXH-001T-P0.6


4. THIS PRODUCT IS RoHS COMPLIANT

PART NO: 32030092

DELTA MODEL: TCA1748ATAGP

10. FREQUENCY GENERATOR (FG) SIGNAL:

1. OUTPUT CIRCUIT - OPEN COLLECTOR MODE:

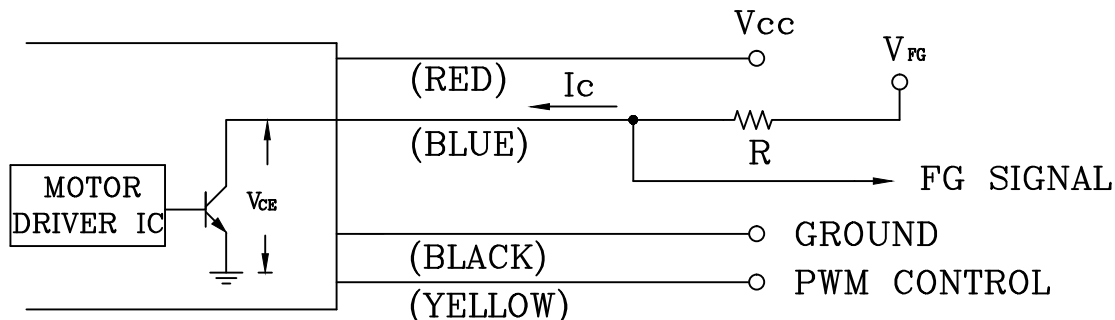


CAUTION: THE FG SIGNAL LEAD WIRE MUST BE KEPT AWAY FROM "+" LEAD WIRE & "-" LEAD WIRE.

2. SPECIFICATION:


$V_{CE}(\text{sat}) = 0.5V \text{ MAX.}$ $V_{FG} = 60.0V \text{ MAX.}$

$I_c = 10mA \text{ MAX.}$ $R \geq V_{FG}/I_c$

3. FREQUENCY GENERATOR WAVEFORM:

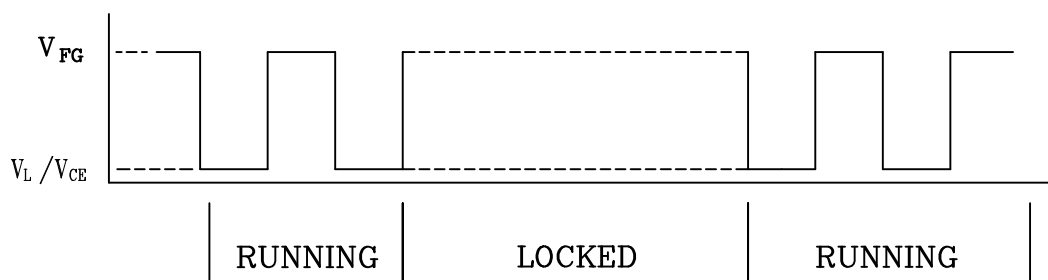

2 PULSES PER ROTATION

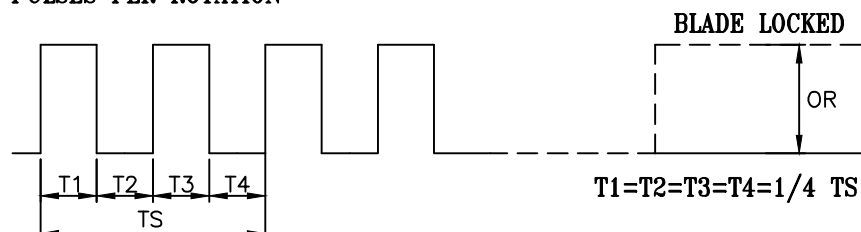

$N = \text{R.P.M}$

$T_S = 60/N(\text{SEC})$

*VOLTAGE LEVEL AFTER BLADE LOCKED


*2 PULSES

PART NO: 32030092

DELTA MODEL: TCA1748ATAGP

11. PWM CONTROL SIGNAL:

SIGNAL VOLTAGE RANGE: -0.8~20VDC

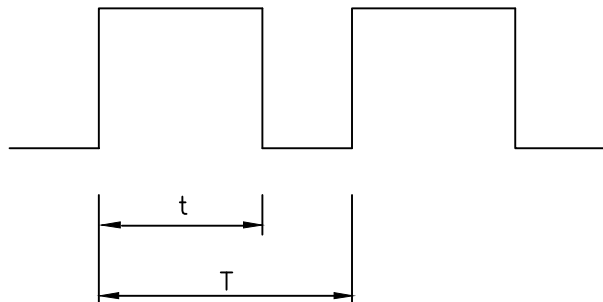

HIGH SIGNAL: 20.0 VDC MAX.
2.8 VDC MIN.

LOW SIGNAL: 0.4 VDC MAX.
-0.8 VDC MIN.


$$\text{DUTY CYCLE} = \frac{t}{T} * 100(\%)$$

- THE FREQUENCY FOR CONTROL SIGNAL OF THE FAN SHALL BE ABLE TO ACCEPT A 600 HZ~30K HZ.
- THE PREFERRED OPERATING POINT FOR THE FAN IS 1KHZ.
- AT 100% DUTY CYCLE, THE ROTOR WILL SPIN AT MAXIMUM SPEED.
- AT 0% DUTY CYCLE, THE ROTOR WILL STOP.
- WITH CONTROL SIGNAL LEAD DISCONNECTED, THE FAN WILL SPIN AT MAXIMUM SPEED.
- AT 48VDC 1KHZ 30% DUTY CYCLE, THE FAN WILL BE ABLE TO START FROM A DEAD STOP.

12. SPEED VS PWM CONTROL SIGNAL: (AT 48VDC & F=1KHZ & TEMP=25DEG.C)

DUTY CYCLE (%)	SPEED (R.P.M.) REF.	CURRENT (A) TYP.
100	4000±10%	1.20
50	2000±10%	0.20
10~20	900±200	0.07
0	0	0.02

13. PWM CONTROL LEAD WIRE INPUT IMPEDANCE:

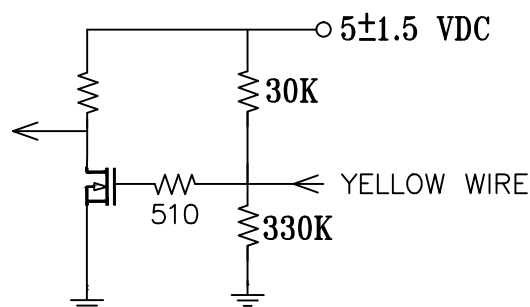


13-1. THE FAN SPEED WILL DEFAULT TO MAXIMUM WHEN THE SPEED CONTROL INPUT IS LEFT UNCONNECTED.


TCA1748ATAGP Delta Datesheet FansCo

Fan Characteristics Informations for Reference *****

1. PQ of Duty

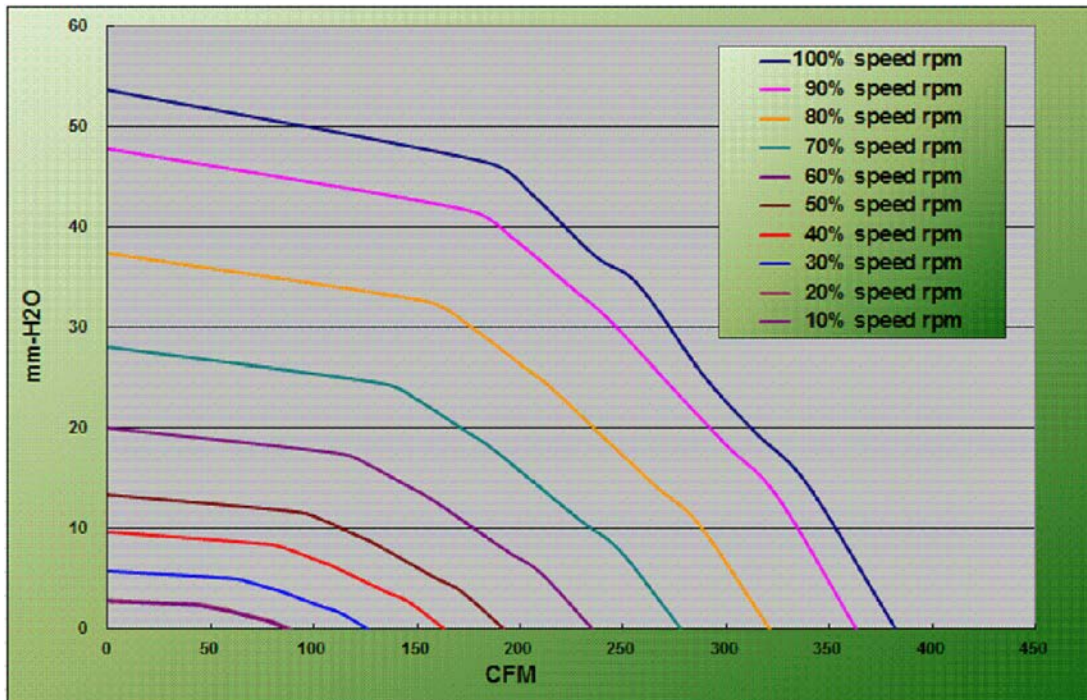


2. Duty vs RPM

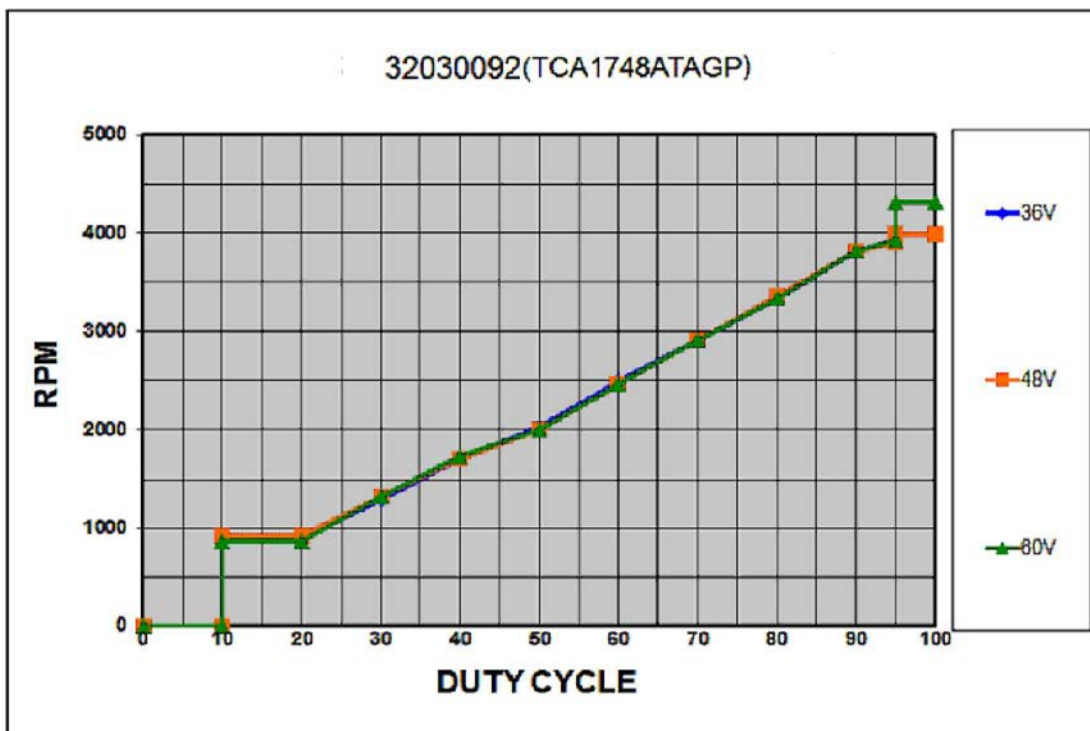

Fan Characteristics Informations for Reference

3. PQ vs Watt of Voltage

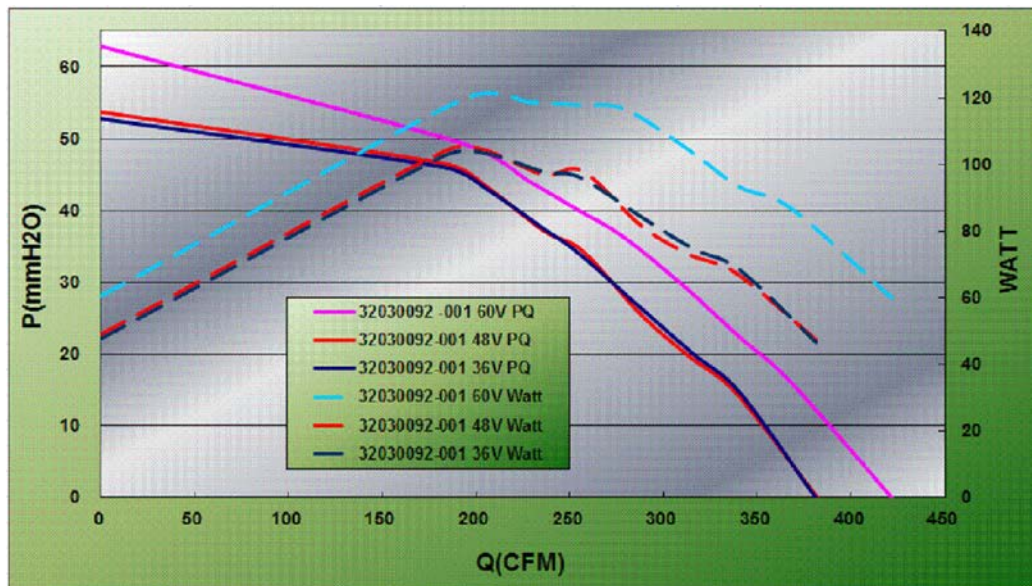


4. RPM vs Watt of Voltage

占空比	額定工作電壓 (48V)		下限工作電壓 (36V)		上限工作電壓 (60V)	
	轉速(r.p.m)	電流 (A)	轉速(r.p.m)	電流 (A)	轉速(r.p.m)	電流 (A)
0%	0	0.02	0	0.02	0	0.02
10%	930	0.06	900	0.07	870	0.05
20%	930	0.06	900	0.07	870	0.05
30%	1320	0.09	1290	0.11	1320	0.08
40%	1710	0.14	1710	0.16	1740	0.12
50%	2010	0.19	2040	0.25	2010	0.16
60%	2460	0.30	2490	0.41	2460	0.25
70%	2910	0.48	2910	0.60	2910	0.37
80%	3360	0.71	3330	0.90	3330	0.56
95%	3990	1.17	3990	1.54	4320	1.17
100%	3990	1.17	3990	1.54	4320	1.17


Above the current value of 10% tolerance

Fan Characteristics Informations for Reference

5. FRAME TYPE OF SCREW TORQUE

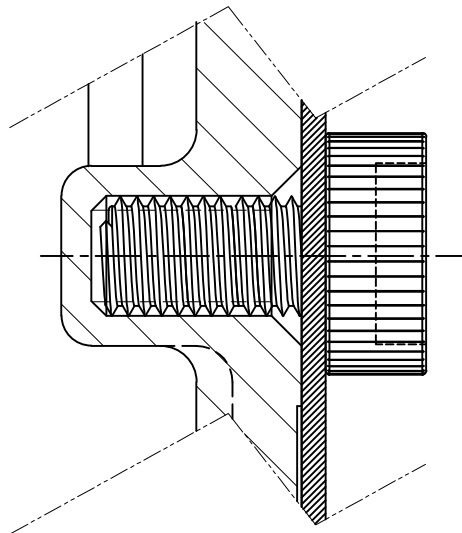

MOUNTING DRAWING

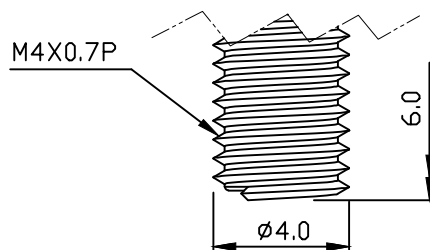

MECHANICAL SCREW

MOUNTING HOLE DIAMETER	SCREW TYPE	SCREW SPEC.	RECOMMENDED MAX. TORQUE(kgf-cm)
M4	MECHANICAL	M4X0.7	10.0±10%

NOTE:

1. MOUNTING HOLE TYPE.
2. MECHANICAL SCREW ACCORDING TO JIS B 0205.



Application Notice

- 1. Delta will not guarantee the performance of the products if the application condition falls outside the parameters set forth in the specification.**
- 2. A written request should be submitted to Delta prior to approval if deviation from this specification is required.**
- 3. Please exercise caution when handling fans. Damage may be caused when pressure is applied to the impeller, if the fans are handled by the lead wires, or if the fan was hard-dropped to the production floor.**
- 4. Except as pertains to some special designs, there is no guarantee that the products will be free from any such safety problems or failures as caused by the introduction of powder, droplets of water or encroachment of insect into the hub.**
- 5. The above-mentioned conditions are representative of some unique examples and viewed as the first point of reference prior to all other information.**
- 6. It is very important to establish the correct polarity before connecting the fan to the power source. Positive (+) and Negative (-). Damage may be caused to the fans if connection is with reverse polarity, if there is no foolproof method to protect against such error specifically mentioned in this spec.**
- 7. Delta fans without special protection are not suitable where any corrosive fluids are introduced to their environment.**
- 8. Please ensure all fans are stored according to the storage temperature limits specified. Do not store fans in a high humidity environment. We highly recommend performance testing is conducted before shipping, if the fans have been stored over 6 months.**
- 9. Not all fans are provided with the Lock Rotor Protection feature. If you impair the rotation of the impeller for the fans that do not have this function, the performance of those fans will lead to failure.**
- 10. Please be cautious when mounting the fan. Incorrect mounting of fans may cause excess resonance, vibration and subsequent noise.**
- 11. It is important to consider safety when testing the fans. A suitable fan guard should be fitted to the fan to guard against any potential for personal injury.**
- 12. Except where specifically stated, all tests are carried out at room (ambient) temperature and relative humidity conditions of 25°C, 65% RH. The test value is only for fan performance itself.**
- 13. Be certain to connect an “ 4.7μF or greater” capacitor to the fan externally when the application calls for using multiple fans in parallel, to avoid any unstable power.**