

8300100227
VBS0250RSLES

EC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100227	
Motor	E06001-23	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2000
Power consumption	W	85
Current draw	A	0.7
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

8300100227
VBS0250RSLES

EC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description


Weight	1.5 kg
Size	250 mm
Motor size	60
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; UKCA; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.
Approval	UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1

8300100227
VBS0250RSLES

EC centrifugal fan - RadiCal

backward-curved, single-intake

Product drawing

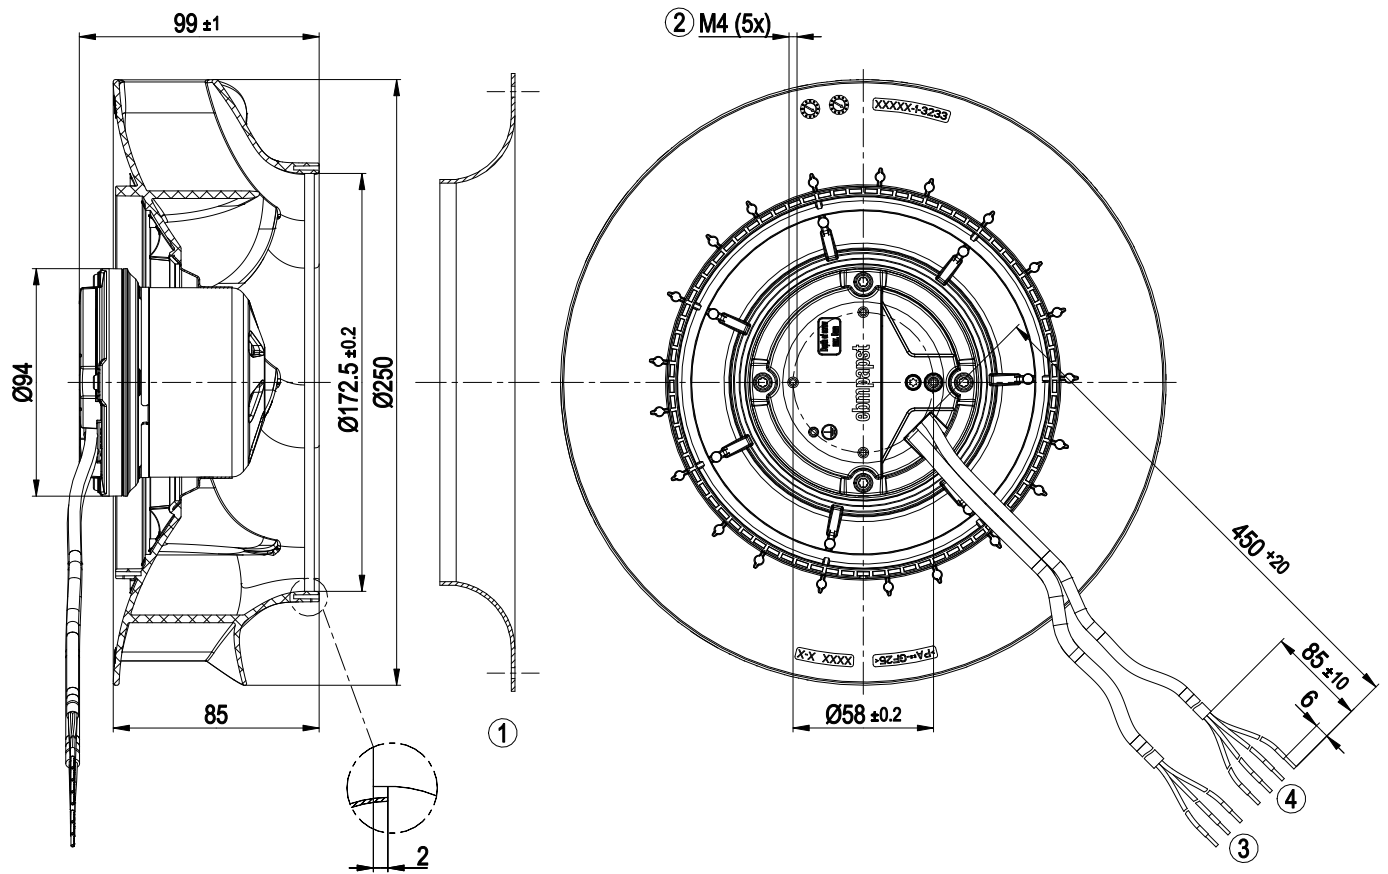



1	Accessory part: inlet ring 96359-2-4013 not included in scope of delivery
2	Max. clearance for screw 5 mm
3	Supply line (PWR) PVC AWG20 3x splice
4	Control wire (CTRL) PVC AWG22 4x splice

8300100227
VBS0250RSLES

EC centrifugal fan - RadiCal


backward-curved, single-intake

Accessory part

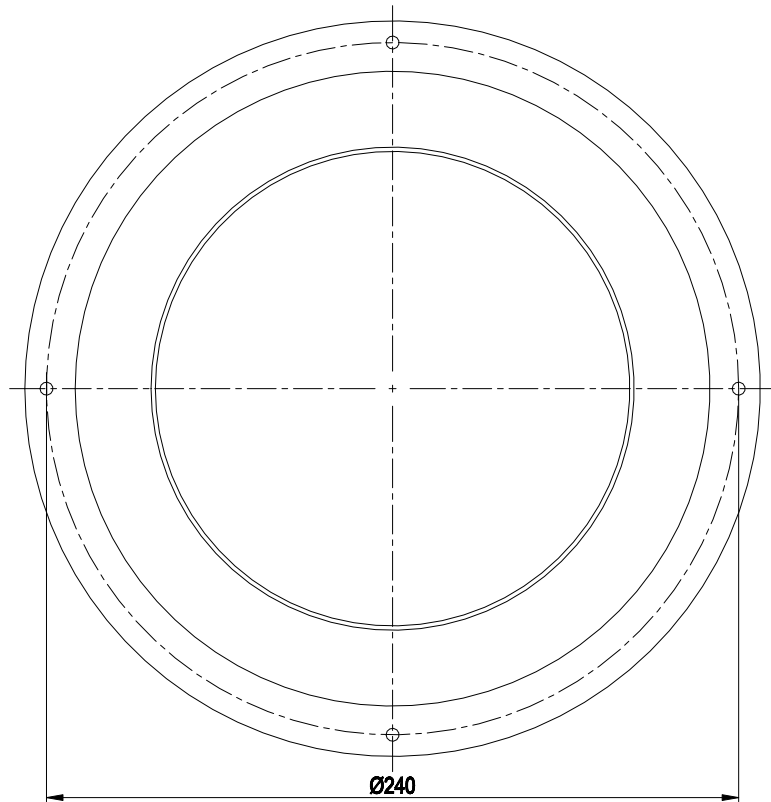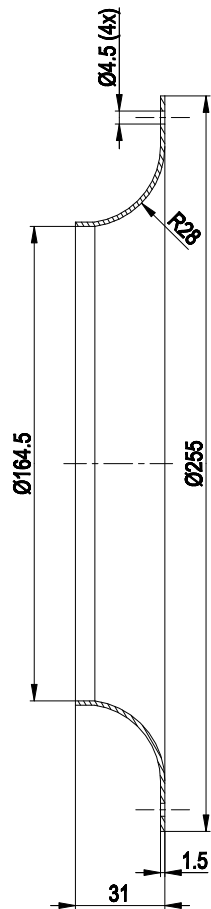

Inlet ring 96359-2-4013

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=1.1 mA Not short-circuit-proof, power supply for external devices, SELV


Terminal/plug assignment

	configurable IO mode	electrical specification	INPUT		OUTPUT					
			switch: parameter set: #1 / #2	switch: direction of rotation: cw / ccw	switch: enable/disable input	configurable function	signal: tach out	signal: diagnostics out	signal: alarm out	signal: run monitoring
IO1	Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV	○	○	○					
	Ain1 0-10 V/PWM: analog input	Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1k..10 kHz, SELV	○		○					
IO2	Tach out (open collector)	U _{max} =50 VDC, I _{max} =10 mA, SELV					○			
	Diagnostics out (open collector)	U _{max} =50 VDC, I _{max} =10 mA, SELV						○		
	Alarm out (open collector)	U _{max} =50 VDC, I _{max} =10 mA, SELV							○	
	Open collector	U _{max} =50 VDC, I _{max} =10 mA, SELV								○
Vout	Voltage output	Voltage 10 VDC, SELV								
			source: set value	switch: parameter set: #1 / #2	switch: enable/disable input	configurable function	signal: tach out	signal: diagnostics out	signal: alarm out	signal: run monitoring
										signal: status
										signal: configurable function

Basic (B4)
Factory configuration option upon request

○ Factory configuration option

Curves: Air performance 50 Hz

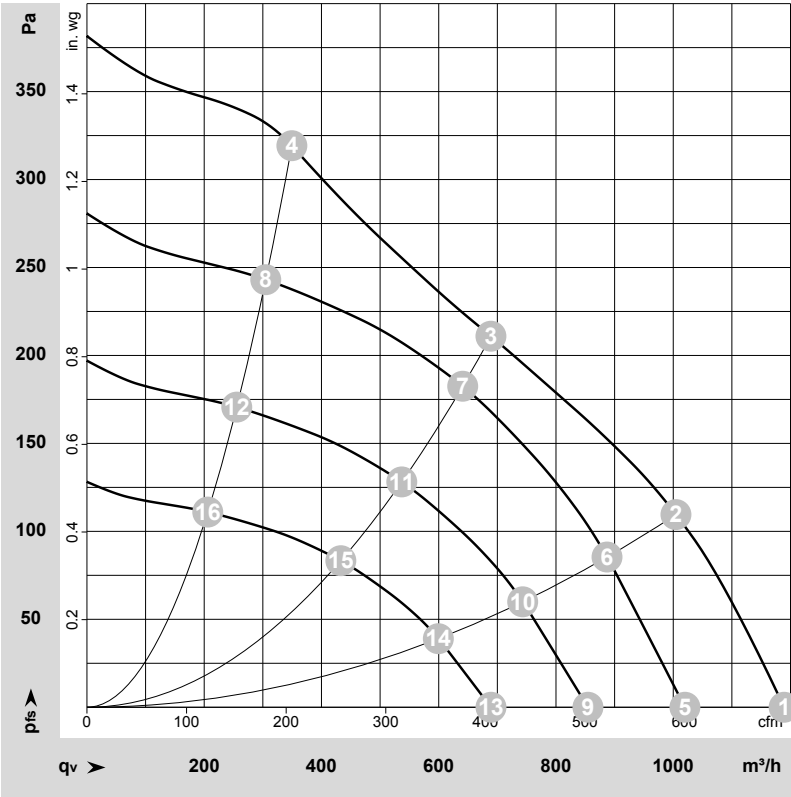

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-215848-1
Date: 2021-09-15
Nozzle: 25010-2-2911

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _V	p _{fs}	q _V	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	2155	75	0.62	64	72	1190	0	700	0.00
2	1~	230	50	2095	85	0.70	59	67	1005	110	590	0.44
3	1~	230	50	2000	85	0.70	54	62	690	210	405	0.84
4	1~	230	50	2120	85	0.70	59	67	350	320	205	1.28
5	1~	230	50	1850	47	0.39	60	68	1020	0	600	0.00
6	1~	230	50	1850	59	0.48	56	64	885	86	520	0.35
7	1~	230	50	1850	69	0.57	52	60	640	183	375	0.73
8	1~	230	50	1850	57	0.47	56	64	305	243	180	0.98
9	1~	230	50	1550	28	0.23	55	63	855	0	505	0.00
10	1~	230	50	1550	35	0.28	51	59	745	60	435	0.24
11	1~	230	50	1550	41	0.33	48	56	535	128	315	0.51
12	1~	230	50	1550	34	0.27	51	59	255	171	150	0.69
13	1~	230	50	1250	15	0.12	50	58	690	0	405	0.00
14	1~	230	50	1250	18	0.15	46	54	600	39	355	0.16
15	1~	230	50	1250	21	0.17	42	50	435	83	255	0.33
16	1~	230	50	1250	18	0.14	46	54	205	111	120	0.45

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_V = Air flow · p_{fs} = Pressure increase