

8300100312
VBS0450CTRNS

EC centrifugal fan - RadiPac

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100312	
Motor	E11233-80	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2940
Power consumption	W	3850
Current draw	A	5.9
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	69.5	57.5	09 Power consumption P_{ed}	kW	3.76
02 Measurement category		A		09 Air flow q_v	m³/h	8305
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	1091
04 Efficiency grade N		74	62	10 Speed (rpm) n	min ⁻¹	2935
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.
The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$ LU-217994



8300100312
VBS0450CTRNS

EC centrifugal fan - RadiPac

backward-curved, single-intake

Technical description

Weight	14.26 kg
Size	450 mm
Motor size	112
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection - Vibration sensor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection



8300100312
VBS0450CTRNS


EC centrifugal fan - RadiPac

backward-curved, single-intake

Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1



Product drawing

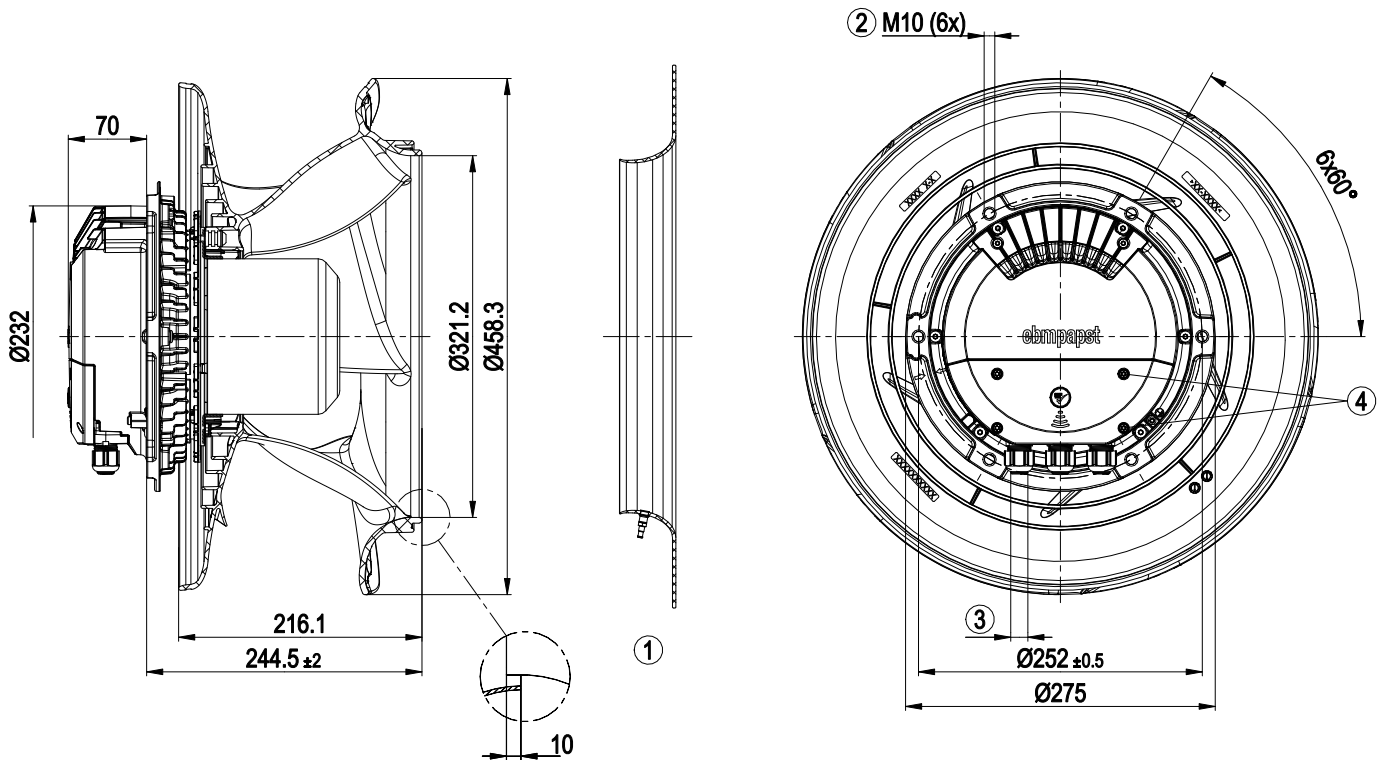


1	Accessory part: Inlet ring 8217102239 with pressure tap (k-factor: 232) (not included in scope of delivery)
2	Max. clearance for screw 20 mm
3	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
4	Tightening torque 1.5 ± 0.2 Nm

8300100312
VBS0450CTRNS

EC centrifugal fan - RadiPac

backward-curved, single-intake

Accessory part

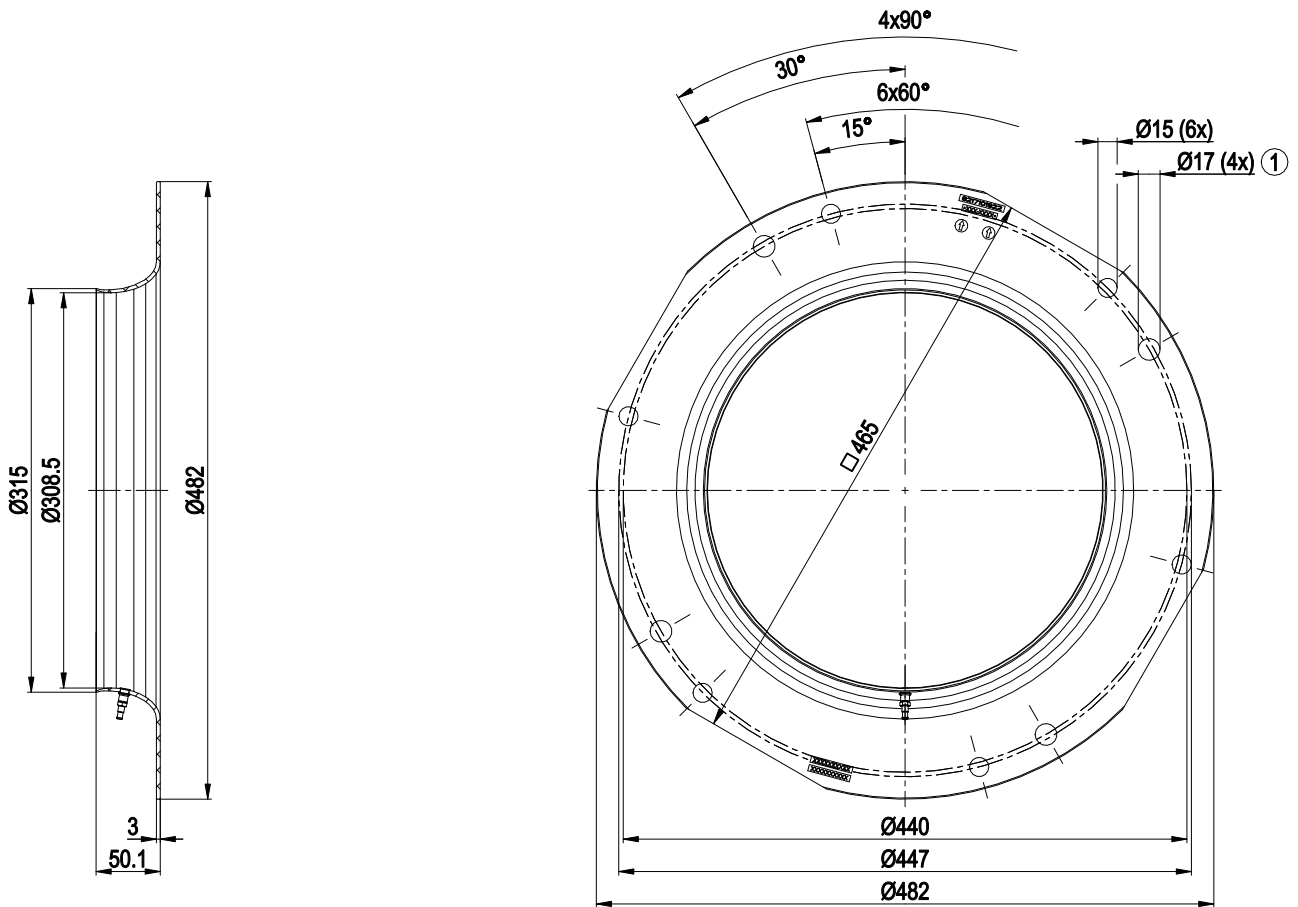

Inlet ring 8217102239 with pressure tap (k-factor: 232)


- | | |
|---|--|
| 1 | Fastening holes for FlowGrid 35505-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required |
|---|--|



EC centrifugal fan - RadiPac

backward-curved, single-intake

Connection diagram

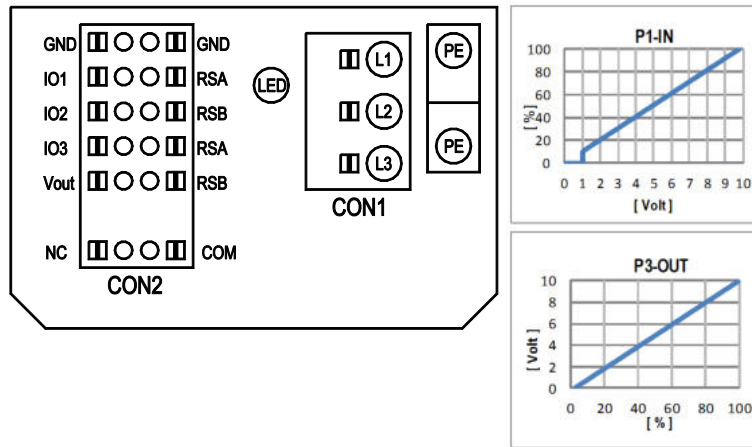


No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Actual speed Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve



Terminal/plug assignment

configurable option		For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3		configurable IO functions: normal / inverse		MODBUS Register for IO mode configuration		electrical specification		configurable IO mode		CON2									
										Din1 (active high): digital input											
IO1	Ain1 0-10V/PWM: analog input Tach out (open collector output) Diagnostics out (open collector output)		active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC Ri = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz SELV Umax = 50VDC, Imax = 20mA SELV Umax = 50VDC, Imax = 20mA SELV		D158 [0] D158 [2] D158 [5] D158 [6]		switch: set value source switch: direction of rotation: cw / ccw switch: control function: heating (pos.) / cooling (neg.) switch: parameter set: #1 / #2		source: set value source: sensor value		D101 [...] D147 [...] D104 [...] D12E [...] D148 [...] D16C [...] D16A [...]		INPUT		OUTPUT						
IO2	Din2 (active high): digital input Ain2 0-10V/PWM: analog input Ain2 4-20mA: analog input		active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC Ri = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz SELV Ri = 125R, characteristic curve parameterizable, SELV		D159 [0] D159 [2] D159 [3]		switch: set value source switch: direction of rotation: cw / ccw switch: control function: heating (pos.) / cooling (neg.) switch: parameter set: #1 / #2		source: set value source: sensor value		D101 [...] D147 [...] D104 [...] D12E [...] D148 [...] D16C [...] D16A [...]		INPUT		OUTPUT						
IO3	Din3 (active high): digital input Din3 (active low): digital input PWMIn3: digital input, idle level high PWMIn3: digital input, idle level low		active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV 40Hz - 10KHz, characteristics parameterizable active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV		D15A [0] D15A [1] D15A [7] D15A [8]		switch: set value source switch: direction of rotation: cw / ccw switch: control function: heating (pos.) / cooling (neg.) switch: parameter set: #1 / #2		source: set value source: sensor value		D101 [...] D147 [...] D104 [...] D12E [...] D148 [...] D16C [...] D16A [...]		INPUT		OUTPUT						
RSA RSB	RS485 bus connection, voltage output alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage		function parameterizable, max. 5mA, max output frequency 300Hz, SELV 0-10V max. 5mA, max output frequency 300Hz, SELV 0-10V max. 5mA, max output frequency 300Hz, SELV MODBUS RTU, specification V6.3, SELV		D15A [4] D15A [5] D15A [6]		switch: set value source switch: direction of rotation: cw / ccw switch: control function: heating (pos.) / cooling (neg.) switch: parameter set: #1 / #2		source: set value source: sensor value		D101 [...] D147 [...] D104 [...] D12E [...] D148 [...] D16C [...] D16A [...]		INPUT		OUTPUT						
Vout			voltage parameterizable 3.3..24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV 15..50VDC		D16E [...]		switch: set value source switch: direction of rotation: cw / ccw switch: control function: heating (pos.) / cooling (neg.) switch: parameter set: #1 / #2		source: set value source: sensor value		D101 [...] D147 [...] D104 [...] D12E [...] D148 [...] D16C [...] D16A [...]		INPUT		OUTPUT						

Curves: Air performance 50 Hz

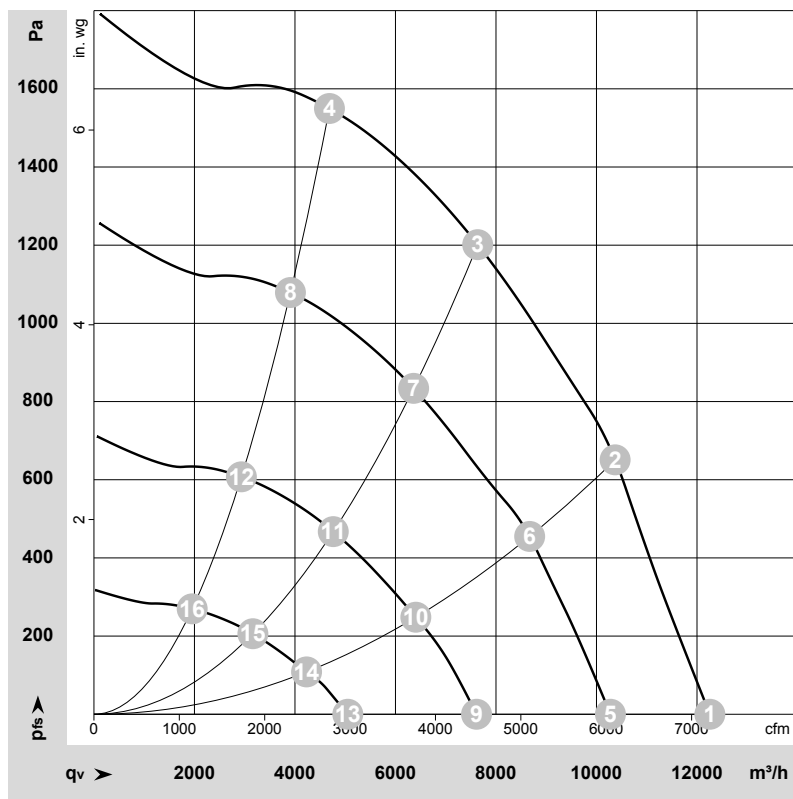

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-217994-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	3~	400	50	2940	2783	4.28	88	96	100	12255	0	7215	0.00
2	3~	400	50	2940	3534	5.40	81	89	93	10370	650	6105	2.61
3	3~	400	50	2940	3850	5.90	78	85	90	7635	1200	4495	4.82
4	3~	400	50	2940	3586	5.48	81	89	96	4685	1550	2760	6.22
5	3~	400	50	2450	1634	2.60	83	91	95	10280	0	6050	0.00
6	3~	400	50	2450	2055	3.22	77	85	89	8670	458	5105	1.84
7	3~	400	50	2450	2232	3.48	73	80	85	6360	834	3745	3.35
8	3~	400	50	2450	2098	3.28	77	84	90	3910	1082	2300	4.34
9	3~	400	50	1835	754	1.37	76	84	88	7615	0	4480	0.00
10	3~	400	50	1835	864	1.52	69	77	82	6405	248	3770	1.00
11	3~	400	50	1835	985	1.68	65	73	78	4760	467	2805	1.87
12	3~	400	50	1835	932	1.61	68	75	81	2935	609	1725	2.44
13	3~	400	50	1220	257	0.67	65	73	77	5050	0	2975	0.00
14	3~	400	50	1220	292	0.73	59	67	71	4230	108	2490	0.43
15	3~	400	50	1220	326	0.78	55	63	68	3165	206	1860	0.83
16	3~	400	50	1220	312	0.76	56	64	69	1955	270	1150	1.08

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase