

8300100732
VWA0630CSPFS

EC axial panel fan - AxiEco

with inlet ring and guard grill

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100732	
Motor	E09001-28	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	720
Power consumption	W	250
Current draw	A	1.6
Max. back pressure	Pa	100
Max. back pressure	in. wg	0.4
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	44.2	29.8	09 Power consumption P_{ed}	kW	0.24
02 Measurement category		A		09 Air flow q_v	m ³ /h	4650
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	73
04 Efficiency grade N		54.4	40	10 Speed (rpm) n	min ⁻¹	720
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_g / 100\,000\text{ Pa}$

LU-223816

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100732
VWA0630CSPFS

EC axial panel fan - AxiEco

with inlet ring and guard grill


Technical description

Weight	21.93 kg
Size	630 mm
Motor size	90
Rotor surface	Painted black
Terminal box material	PA plastic
Electronics housing material	Die-cast aluminum, painted gray
Impeller material	PP plastic, PP ring plastic
Inlet ring material	Sheet steel, galvanized and coated with black plastic (RAL 9005)
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Locked-rotor detection - Speed control - Alarm relay - Power limiter - Motor current limitation - PFC, passive - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

EC axial panel fan - AxiEco

with inlet ring and guard grill

Product drawing

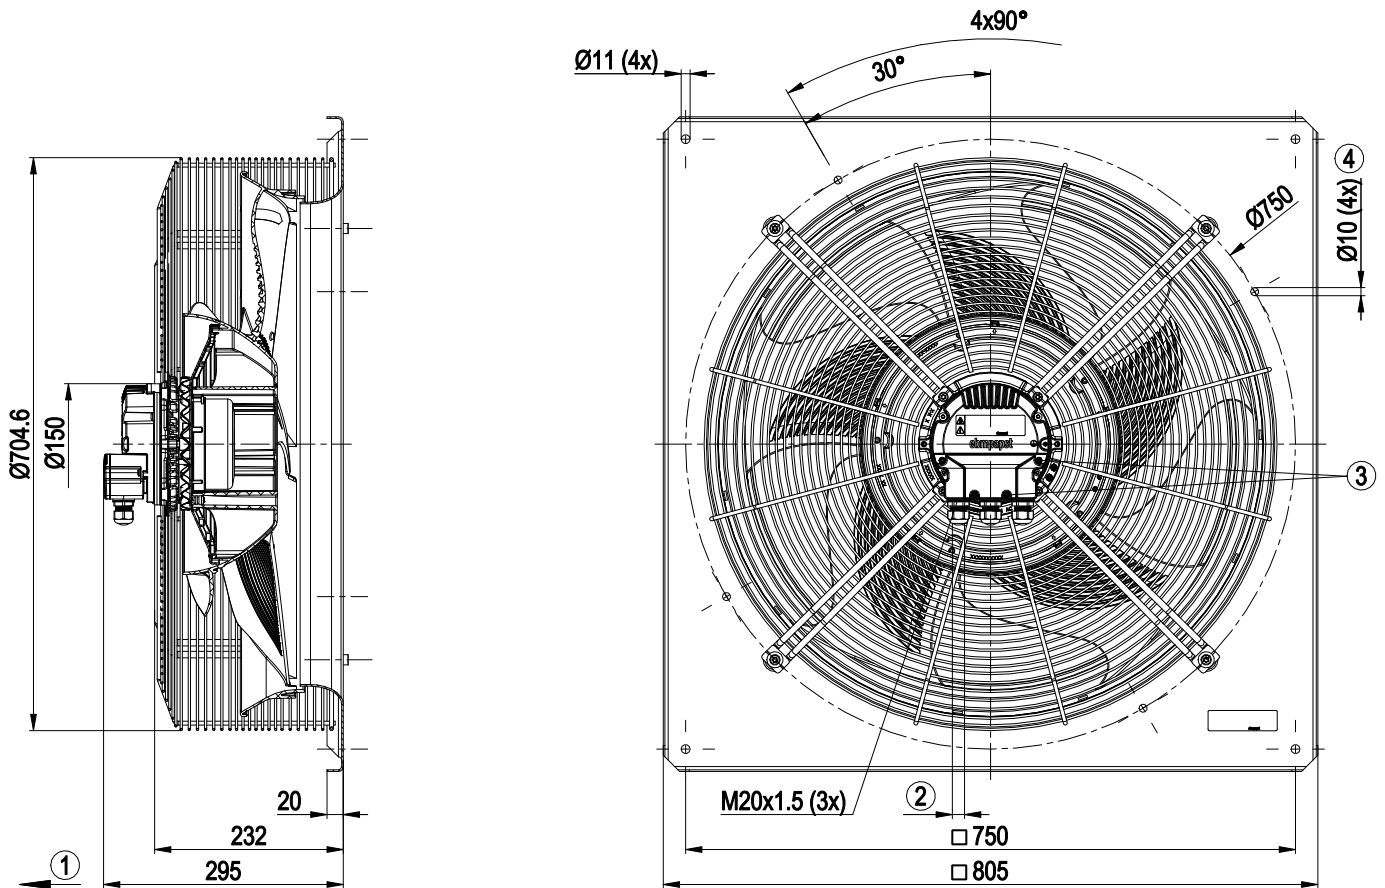


1	Airflow direction "V"
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
3	Tightening torque 2 ± 0.3 Nm
4	Attachment holes for FlowGrid 63000-2-2957 (not included in scope of delivery)

EC axial panel fan - AxiEco

with inlet ring and guard grill

Connection diagram

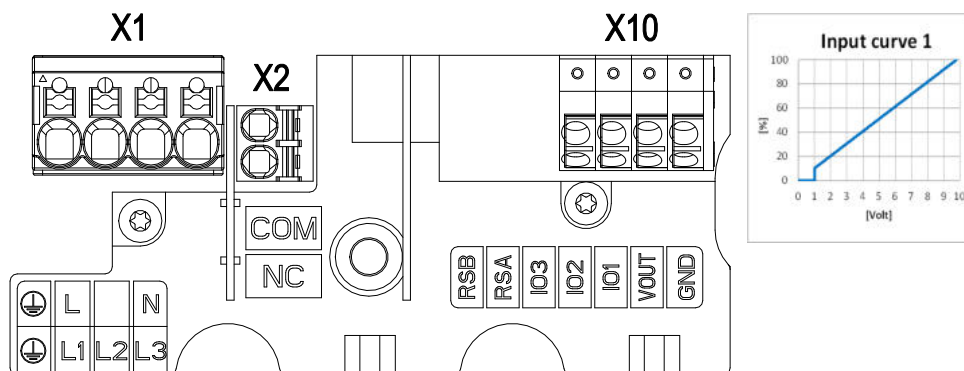

No.	Conn.	Designation	Function/assignment
X1	PWR	PE	Protective earth
X1	PWR	L	Power supply, phase, see nameplate for voltage range
X1	PWR	N	Power supply, neutral conductor, see nameplate for voltage range
X2	CTRL	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
X2	CTRL	NC	Status relay, floating status contact, break for failure
X10	CTRL	GND	Reference ground for control interface, SELV
X10	CTRL	Vout	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV
X10	CTRL	IO1	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable at the factory (see table Optional interface functions)
X10	CTRL	IO2	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)

EC axial panel fan - AxiEco

with inlet ring and guard grill

Terminal/plug assignment

Basic (B5)
Factory configuration option upon request


o factory configuration option

		electrical specification		INPUT		OUTPUT			
configurable IO mode		active: parametrizable voltage x - 30 VDC not active: pin open or parametrizable voltage < x VDC, SELV		switch: parameter set: #1 / #2	switch: direction of rotation: cw / ccw	switch: enable/disable input	configurable function	signal: tach out	signal: diagnostics out
IO1	Din1 (high active): digital input	active: parametrizable voltage x - 30 VDC		o	o	o	o		
	Ain1 0-10 V/PWM: analog input	not active: pin open or parametrizable voltage < x VDC, SELV Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1 k - 10 kHz, SELV		o			o		
IO2	Tach out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV						o	
	Diagnostics out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV							o
	Alarm out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV							o
	Open collector	Umax = 50 VDC, Imax = 20 mA, SELV							
COM	Relais	250 VAC / 2 A (AC1)							
NC									
Vout	Voltage output	Voltage 10 VDC, SELV							
				source: set value	switch: parameter set: #1 / #2	switch: enable/disable input	configurable function	signal: tach out	signal: diagnostics out
				signal: alarm out	signal: run monitoring	signal: status	signal: configurable function	signal: configurable function	signal: configurable function

EC axial panel fan - AxiEco

with inlet ring and guard grill

Curves: Air performance 50 Hz

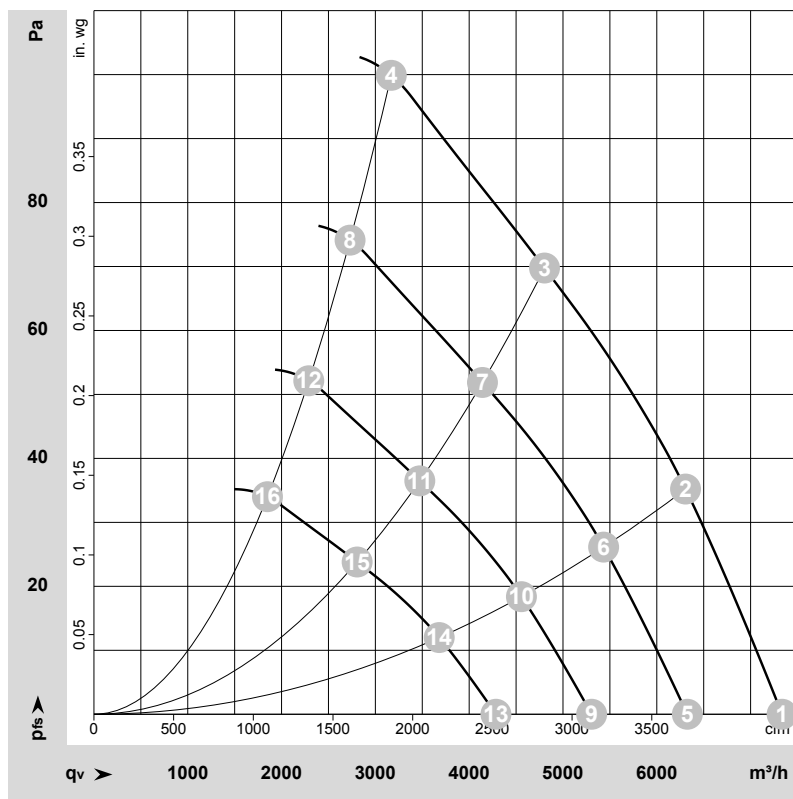

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-223816-1
Date: 2022-11-21
Nozzle: 60630-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	1~	230	50	720	150	1.01	59	66	67	70	7335	0	4320	0.00
2	1~	230	50	720	194	1.27	56	63	65	67	6305	35	3710	0.14
3	1~	230	50	720	237	1.52	55	62	64	66	4805	70	2825	0.28
4	1~	230	50	720	250	1.60	57	64	67	69	3170	100	1865	0.40
5	1~	230	50	620	96	0.65	56	62	64	66	6325	0	3725	0.00
6	1~	230	50	620	124	0.81	52	59	61	63	5435	26	3200	0.10
7	1~	230	50	620	152	0.98	51	58	61	63	4140	52	2440	0.21
8	1~	230	50	620	162	1.04	53	60	63	65	2730	75	1605	0.30
9	1~	230	50	520	57	0.38	51	58	59	62	5305	0	3125	0.00
10	1~	230	50	520	73	0.48	48	54	56	59	4555	19	2680	0.08
11	1~	230	50	520	90	0.58	46	54	56	58	3475	37	2045	0.15
12	1~	230	50	520	96	0.61	49	56	59	60	2290	53	1350	0.21
13	1~	230	50	420	30	0.20	46	53	54	56	4285	0	2520	0.00
14	1~	230	50	420	39	0.25	42	49	51	53	3680	12	2165	0.05
15	1~	230	50	420	47	0.30	41	48	51	53	2805	24	1650	0.10
16	1~	230	50	420	50	0.32	43	51	53	55	1850	34	1090	0.14

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase