

8300100756
VBS0280CSPFS

EC centrifugal fan - RadiPac

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100756	
Motor	E09003-28	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	3640
Power consumption	W	800
Current draw	A	3.5
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	70.7	50.5	09 Power consumption P_{ed}	kW	0.8
02 Measurement category		A		09 Air flow q_v	m³/h	2485
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	753
04 Efficiency grade N		82.2	62	10 Speed (rpm) n	min ⁻¹	3645
05 Variable speed drive		Yes		11 Specific ratio*		1.01


Data obtained at optimum efficiency level.
The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$ LU-225229

Technical description


Weight	5.11 kg
Size	280 mm
Motor size	90
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display with LED - Locked-rotor detection - Speed control - External 15-30 VDC input (parameterization) - Alarm relay - Configurable inputs/outputs (I/O) - Power limiter - MODBUS - Motor current limitation - PFC, active - RS-485 MODBUS-RTU - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Lateral
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 61800-5-1; CE

Product drawing

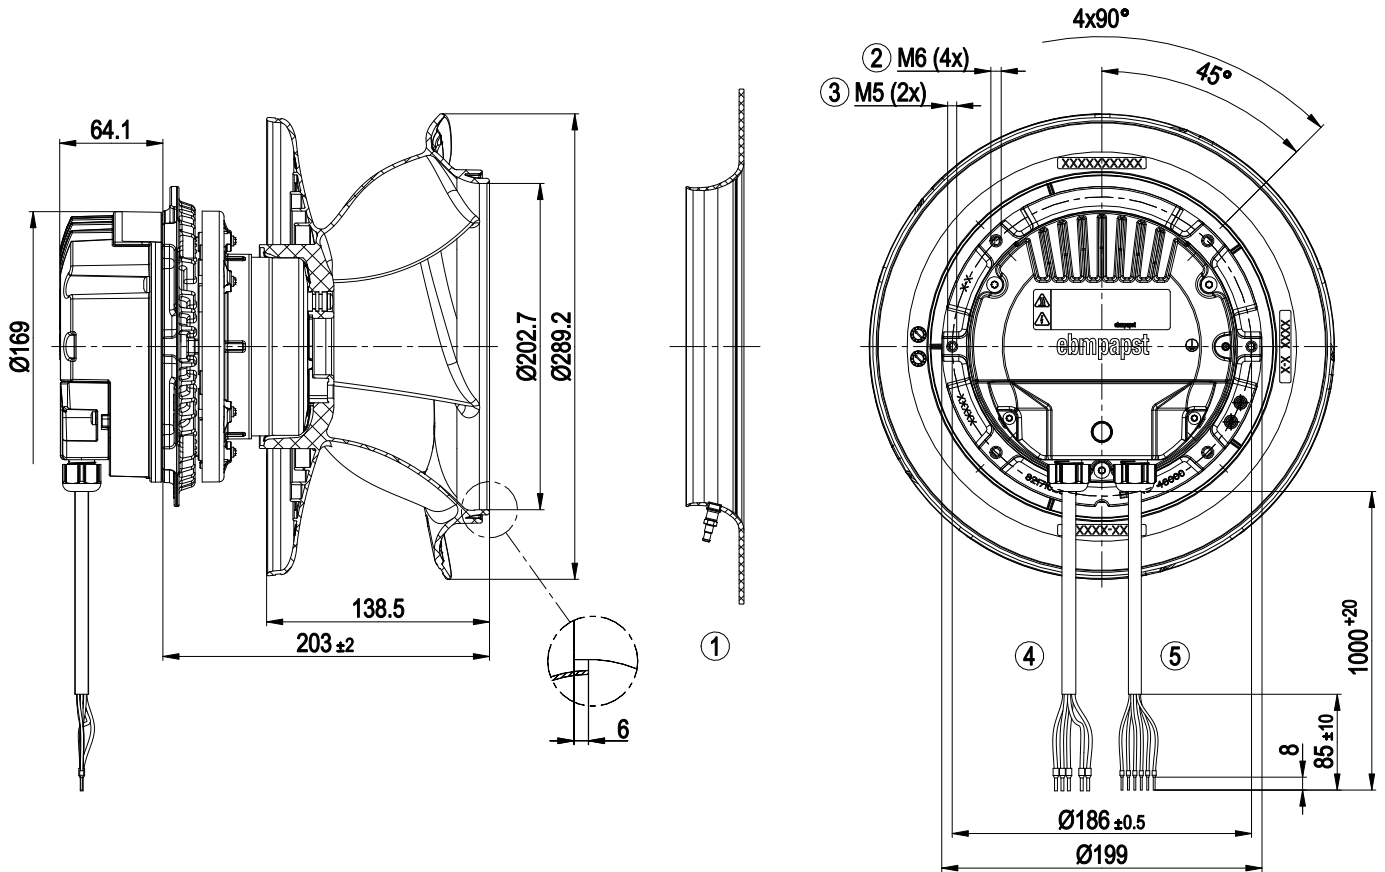

1	Accessory part: Inlet ring 8217104581 with pressure tap (k-factor: 98) (not included in scope of delivery)
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 10 mm
	The M5 tapped holes (2x) can be used to attach hoisting equipment.
4	Supply line (PWR) PVC AWG18
	5x wire-end ferrule
5	Control wire (CTRL) PVC AWG22
	6x wire-end ferrule

Accessory part

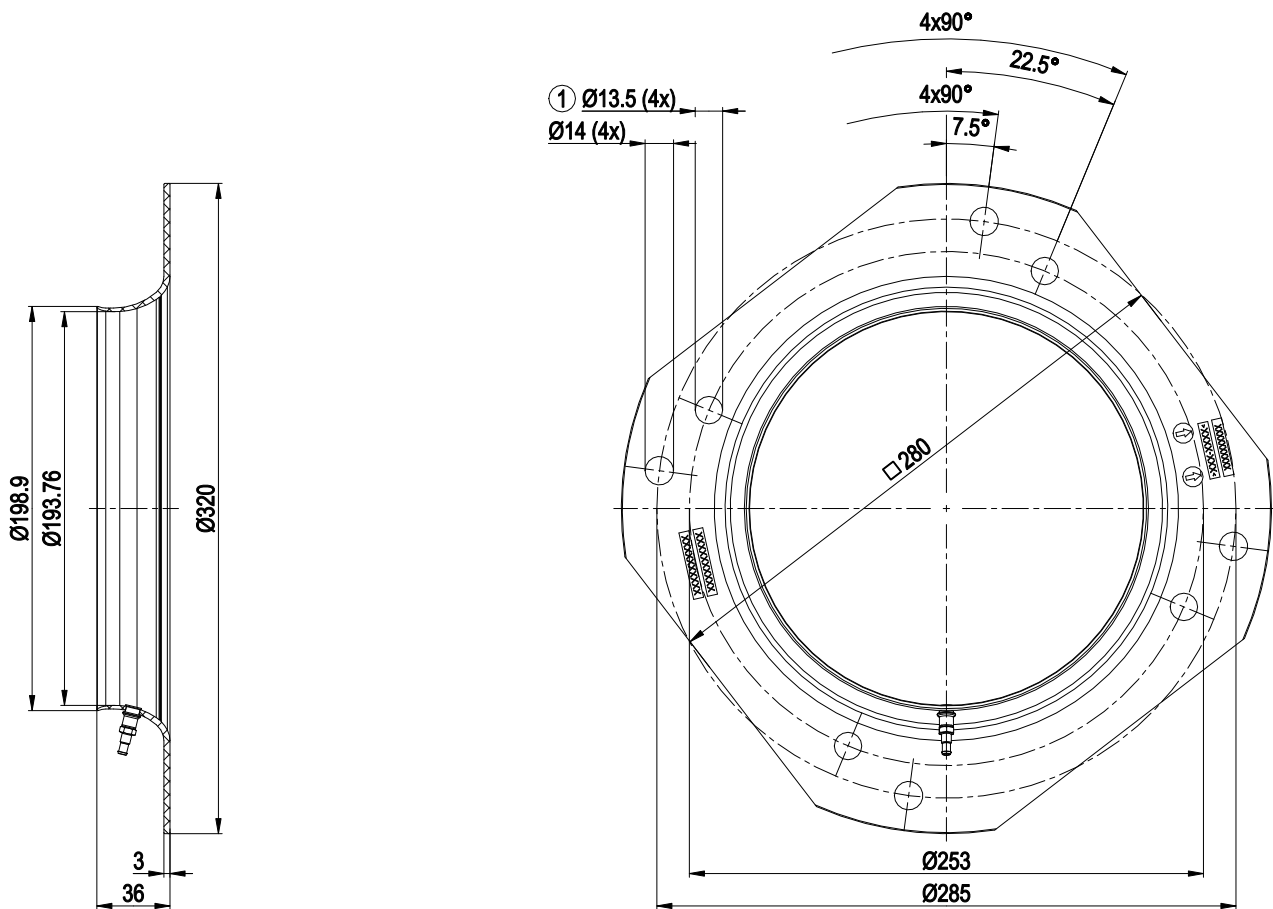


Inlet ring 8217104581 with pressure tap (k-factor: 98)

- | | |
|---|--|
| 1 | Fastening holes for FlowGrid 20280-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required |
|---|--|

EC centrifugal fan - RadiPac

backward-curved, single-intake

Connection diagram




No.	Conn.	Designation	Color	Function/assignment
	PWR	PE	green/yellow	Protective earth
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	COM	orange	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	PWR	NC	orange	Status relay, floating status contact, break for failure
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV alternative: 15-30 VDC input for parameterization via MODBUS without line voltage
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable (see table Optional interface functions)
	CTRL	IO2	white	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable (see table Optional interface functions)
	CTRL	RSA	gray	RS-485 interface for MODBUS RSA, SELV dielectric strength to MODBUS RSB +/-14 V, dielectric strength to GND +/-7 V
	CTRL	RSB	brown	RS-485 interface for MODBUS RSB, SELV dielectric strength to MODBUS RSA +/-14 V, dielectric strength to GND +/-7 V
		LED		green: status = good, ready for operation orange: status = warning red: status = failure

Terminal/plug assignment

Medium (M2)		Functions and parameter description MODBUS V7.1		configurable IO mode		electrical specification		MODBUS Register for IO mode configuration		configurable IO functions: normal / inverse	
IO1	Dim1 (high active): digital input	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D158 [0]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D158 [0]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D158 [0]	source: set value	D101 [...]	source: sensor value	D147 [...]
IO2	Dim1 (low active): digital input	active: applied voltage < 1.5 VDC not active: pin open or applied voltage 3.5 - 50 VDC, SELV	D158 [1]	active: applied voltage < 1.5 VDC not active: pin open or applied voltage 3.5 - 50 VDC, SELV	D158 [1]	active: applied voltage < 1.5 VDC not active: pin open or applied voltage 3.5 - 50 VDC, SELV	D158 [1]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D12E [...]
IO2	Ain1 0-10 V/PWM: analog input	RI = 100 k Ω , characteristic curve parameterizable, f_{PWM} = 1 k - 10 kHz, SELV	D158 [2]	RI = 100 k Ω , characteristic curve parameterizable, f_{PWM} = 1 k - 10 kHz, SELV	D158 [2]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D158 [2]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]
IO2	Ain1 0-10 V/PWM (with pull up): analog input	RI = 100 k Ω , characteristic curve parameterizable, f_{PWM} = 1 k - 10 kHz, SELV	D158 [3]	RI = 100 k Ω , characteristic curve parameterizable, f_{PWM} = 1 k - 10 kHz, SELV	D158 [3]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D158 [3]	source: input pulses autoaddressing	D00C [1]	source: DCI in	D638 [...]
IO2	Dim1 (active high): digital input	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [0]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [0]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [0]	signal: tach out	(o)	signal: diagnostics out	(o)
IO2	Ain1 0-10 V/PWM: analog input	RI = 100 k Ω , characteristic curve parameterizable, f_{PWM} = 1 k - 10 kHz, SELV	D159 [2]	RI = 100 k Ω , characteristic curve parameterizable, f_{PWM} = 1 k - 10 kHz, SELV	D159 [2]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [2]	signal: output pulses autoaddressing	D130 [4]	signal: DCI out	D61B
IO2	Tach out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [5]	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [5]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [5]	signal: fan modulation level %	D130 [0]	signal: actual speed 1/min	D130 [1]
IO2	Diagnostics out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [6]	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [6]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [6]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10 V	D130 [3]
IO2	Alarm out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [10]	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [10]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [10]	signal: alarm out	D130 [1]	signal: run monitoring	D145
IO2	Autodressing pulse output (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [11]	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [11]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [11]	signal: tach out	(o)	signal: diagnostics out	(o)
IO2	DCI-output (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [12]	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [12]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [12]	signal: output pulses autoaddressing	(o)	signal: fan modulation level %	(o)
IO2	RS485 bus connection	MODBUS RTU, parameter specification V7.1, SELV	D159 [12]	MODBUS RTU, parameter specification V7.1, SELV	D159 [12]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [12]	signal: alarm out	(o)	signal: fan modulation level %	(o)
IO2	Relay	250 VAC / 2 A (AC1)	D159 [12]	250 VAC / 2 A (AC1)	D159 [12]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [12]	signal: alarm out	(o)	signal: fan modulation level %	(o)
IO2	Voltage output	Voltage 10 VDC, SELV	D159 [12]	Voltage 10 VDC, SELV	D159 [12]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [12]	signal: alarm out	(o)	signal: fan modulation level %	(o)
IO2	Vout	15 - 30 VDC	D159 [12]	15 - 30 VDC	D159 [12]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [12]	signal: alarm out	(o)	signal: fan modulation level %	(o)

Curves: Air performance 50 Hz

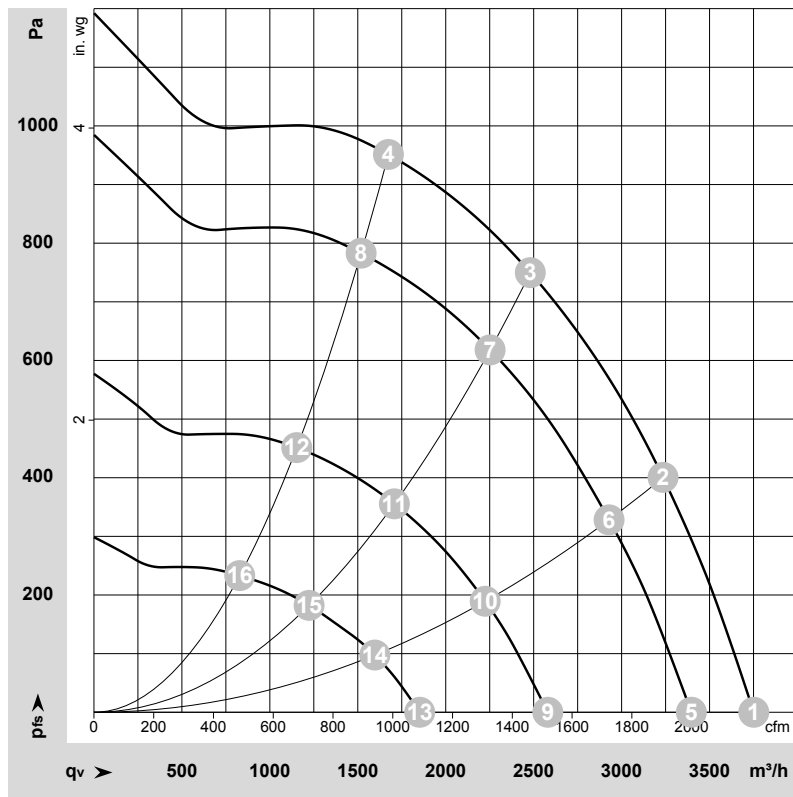

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-225229-1
Date: 2023-02-03
Nozzle: 8217102502

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	3640	551	2.43	78	86	3750	0	2210	0.00
2	1~	230	50	3640	714	3.13	72	80	3235	400	1905	1.61
3	1~	230	50	3640	800	3.50	68	76	2480	750	1460	3.01
4	1~	230	50	3640	771	3.38	72	79	1675	950	985	3.81
5	1~	230	50	3305	422	1.87	76	84	3395	0	2000	0.00
6	1~	230	50	3310	538	2.37	69	77	2930	328	1725	1.32
7	1~	230	50	3310	605	2.66	66	73	2250	621	1325	2.49
8	1~	230	50	3310	582	2.56	70	77	1520	784	895	3.15
9	1~	230	50	2525	200	0.91	69	77	2580	0	1520	0.00
10	1~	230	50	2525	252	1.14	63	71	2225	189	1310	0.76
11	1~	230	50	2525	282	1.26	61	67	1710	357	1005	1.43
12	1~	230	50	2525	271	1.22	63	70	1155	452	680	1.81
13	1~	230	50	1805	88	0.47	60	68	1850	0	1090	0.00
14	1~	230	50	1805	107	0.55	55	63	1595	98	940	0.39
15	1~	230	50	1805	118	0.59	53	60	1225	183	720	0.73
16	1~	230	50	1805	115	0.57	54	61	830	233	490	0.94

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · P_{fs} = Pressure increase