

8300100804
VMA0500CSPFS

EC axial panel fan - AxiEco

with guard grille

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100804	
Motor	E09002-28	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1000
Power consumption	W	320
Current draw	A	1.45
Max. back pressure	Pa	140
Max. back pressure	in. wg	0.56
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	42.7	30.4	09 Power consumption P_{ed}	kW	0.3
02 Measurement category		A		09 Air flow q_v	m ³ /h	4255
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	98
04 Efficiency grade N		52.3	40	10 Speed (rpm) n	min ⁻¹	1000
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-223969

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100804
VMA0500CSPFS


EC axial panel fan - AxiEco

with guard grille

Technical description


Size	500 mm
Motor size	90
Rotor surface	Painted black
Terminal box material	PA plastic
Electronics housing material	Die-cast aluminum, painted gray
Impeller material	PP plastic
Inlet ring material	Sheet steel, galvanized and coated with black plastic (RAL 9005)
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Locked-rotor detection - Speed control - Alarm relay - Power limiter - Motor current limitation - PFC, active - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

Product drawing

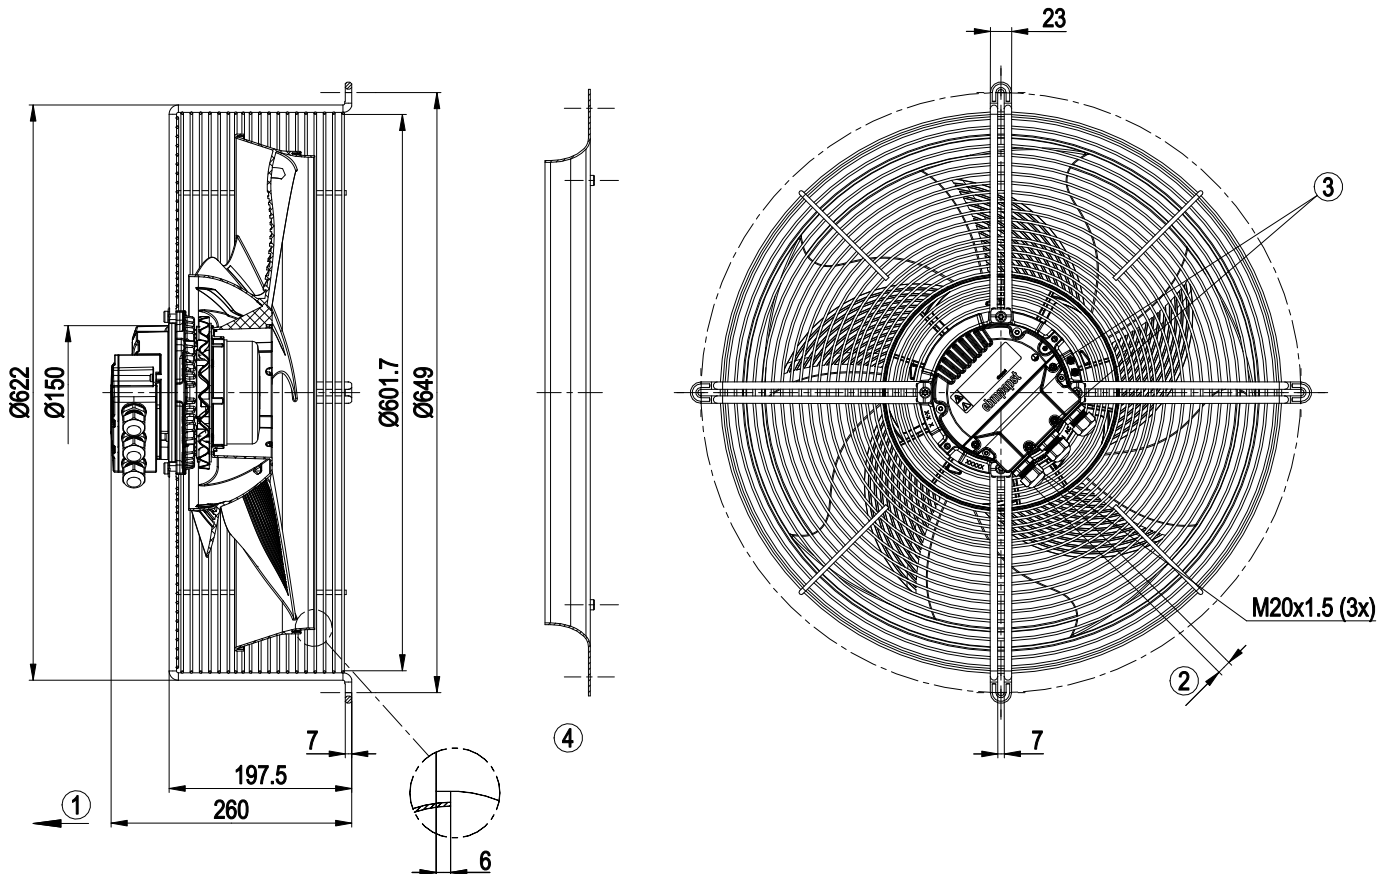

1	Airflow direction "V"
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
3	Tightening torque 2 ± 0.3 Nm
4	Accessory part: Inlet ring 50100-2-4013 not included in scope of delivery.

Accessory part

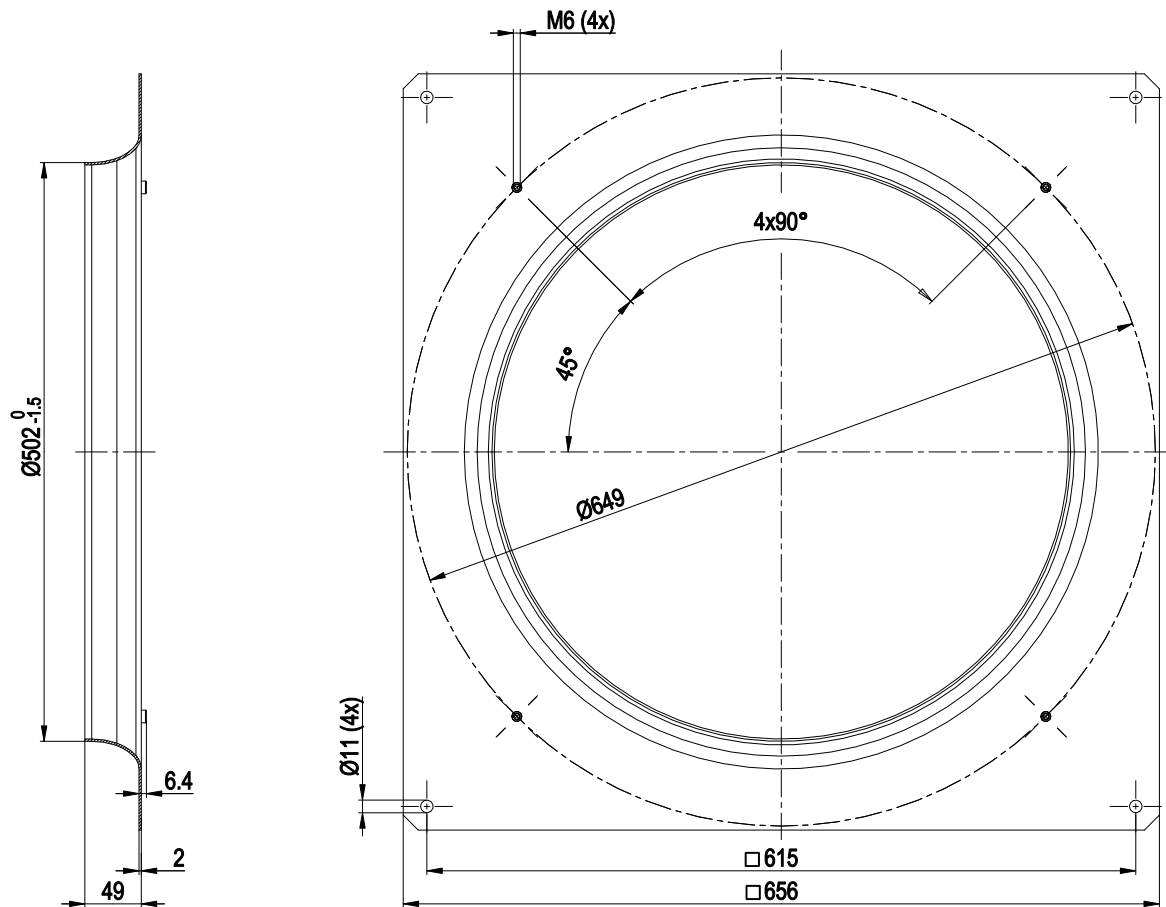


Inlet ring 50100-2-4013

EC axial panel fan - AxiEco

with guard grille

Connection diagram

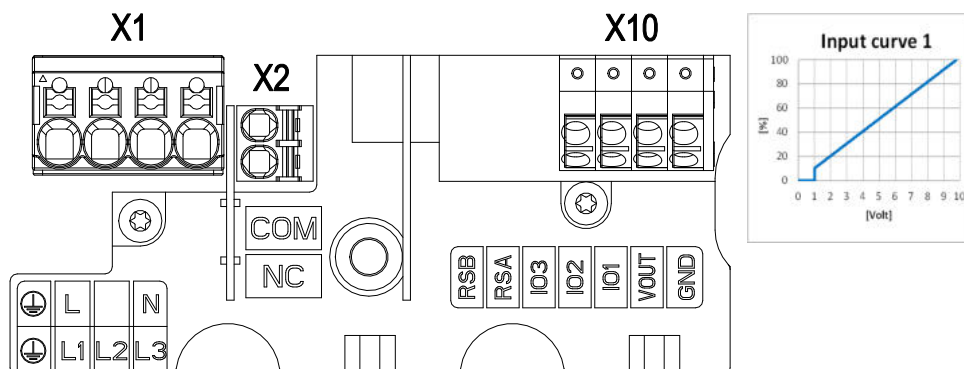

No.	Conn.	Designation	Function/assignment
X1	PWR	PE	Protective earth
X1	PWR	L	Power supply, phase, see nameplate for voltage range
X1	PWR	N	Power supply, neutral conductor, see nameplate for voltage range
X2	CTRL	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
X2	CTRL	NC	Status relay, floating status contact, break for failure
X10	CTRL	GND	Reference ground for control interface, SELV
X10	CTRL	Vout	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV
X10	CTRL	IO1	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable at the factory (see table Optional interface functions)
X10	CTRL	IO2	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)

EC axial panel fan - AxiEco

with guard grille


Terminal/plug assignment

Basic (B5)
Factory configuration option upon request

factory configuration option

		electrical specification		configurable IO mode		INPUT		OUTPUT			
IO1	Din1 (high active): digital input	active: parametrizable voltage x - 30 VDC not active: pin open or parametrizable voltage < x VDC, SELV Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1 k - 10 kHz, SELV		Ain1 0-10 V/PWM: analog input		source: set value	switch: parameter set: #1 / #2	switch: direction of rotation: cw / ccw	switch: enable/disable input	configurable function	signal: tach out
						○	○	○	○	○	signal: diagnostics out
IO2	Tach out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV		Diagnostics out (open collector)							signal: tach out
											○
											○
											○
COM NC	Relais	250 VAC / 2 A (AC1)		Voltage output							signal: run monitoring
											signal: status
Vout											signal: configurable function

Curves: Air performance 50 Hz

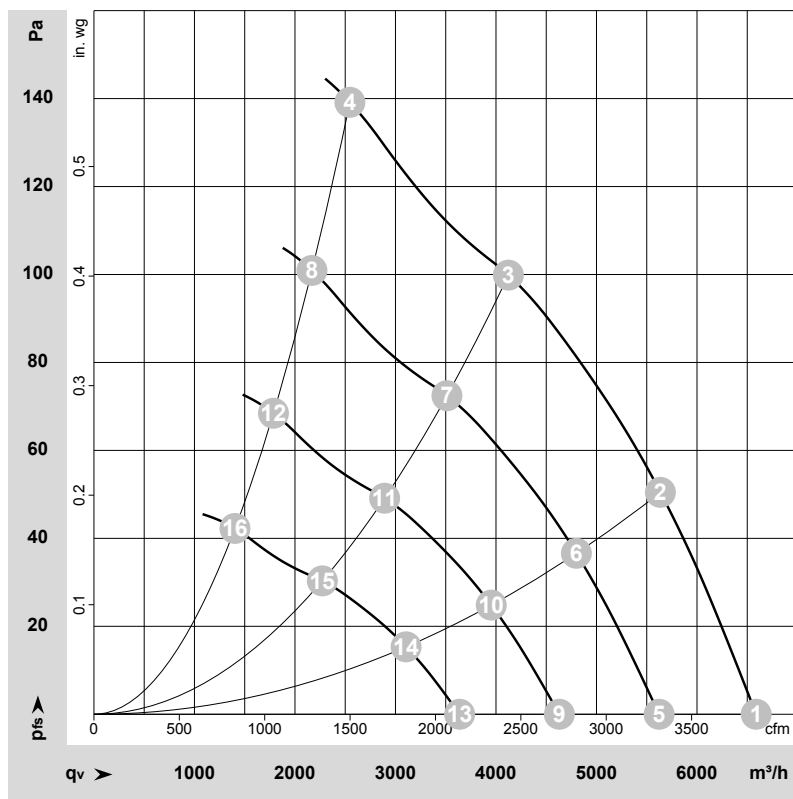

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-223969-1
Date: 2023-01-17
Nozzle: 50100-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _V	P _{fs}	q _V	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	1~	230	50	1000	215	0.98	62	68	71	73	6590	0	3880	0.00
2	1~	230	50	1000	265	1.20	59	66	68	70	5635	50	3315	0.20
3	1~	230	50	1000	305	1.38	58	65	69	70	4125	100	2425	0.40
4	1~	230	50	1000	320	1.45	62	69	75	76	2545	140	1500	0.56
5	1~	230	50	850	134	0.61	58	64	67	69	5625	0	3310	0.00
6	1~	230	50	850	164	0.74	55	62	64	66	4800	37	2825	0.15
7	1~	230	50	850	188	0.85	53	61	65	66	3510	73	2065	0.29
8	1~	230	50	850	197	0.89	58	65	71	72	2170	102	1275	0.41
9	1~	230	50	700	75	0.34	53	59	62	64	4630	0	2725	0.00
10	1~	230	50	700	91	0.42	50	57	59	61	3955	25	2325	0.10
11	1~	230	50	700	105	0.48	49	56	60	62	2890	49	1700	0.20
12	1~	230	50	700	110	0.50	53	60	66	67	1785	69	1050	0.28
13	1~	230	50	550	36	0.17	47	53	56	58	3640	0	2140	0.00
14	1~	230	50	550	44	0.20	44	51	53	55	3105	15	1830	0.06
15	1~	230	50	550	51	0.23	42	50	54	55	2270	30	1335	0.12
16	1~	230	50	550	53	0.24	47	54	60	61	1405	43	825	0.17

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_V = Air flow · P_{fs} = Pressure increase