

8300100888
VBS0500CSPFS

EC centrifugal fan - RadiPac

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KGaA & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100888	
Motor	E09002-28	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1050
Power consumption	W	370
Current draw	A	1.6
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	67.5	46.9	09 Power consumption P_{ed}	kW	0.36
02 Measurement category		A		09 Air flow q_v	m³/h	4050
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	196
04 Efficiency grade N		82.6	62	10 Speed (rpm) n	min ⁻¹	1050
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level. * Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$ LU-224474

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

Technical description

Weight	7.4 kg
Size	500 mm
Motor size	90
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1 = Moist – occasional or constantly high level of humidity
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display with LED - Locked-rotor detection - Speed control - External 15-30 VDC input (parameterization) - Alarm relay - Configurable inputs/outputs (I/O) - Power limiter - MODBUS - Motor current limitation - PFC, active - RS-485 MODBUS-RTU - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Power Factor Correction (PFC)	Active
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Lateral
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 61800-5-1; CE; UKCA

8300100888
VBS0500CSPFS

EC centrifugal fan - RadiPac

backward-curved, single-intake


Approval

CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

EC centrifugal fan - RadiPac


backward-curved, single-intake

Product drawing

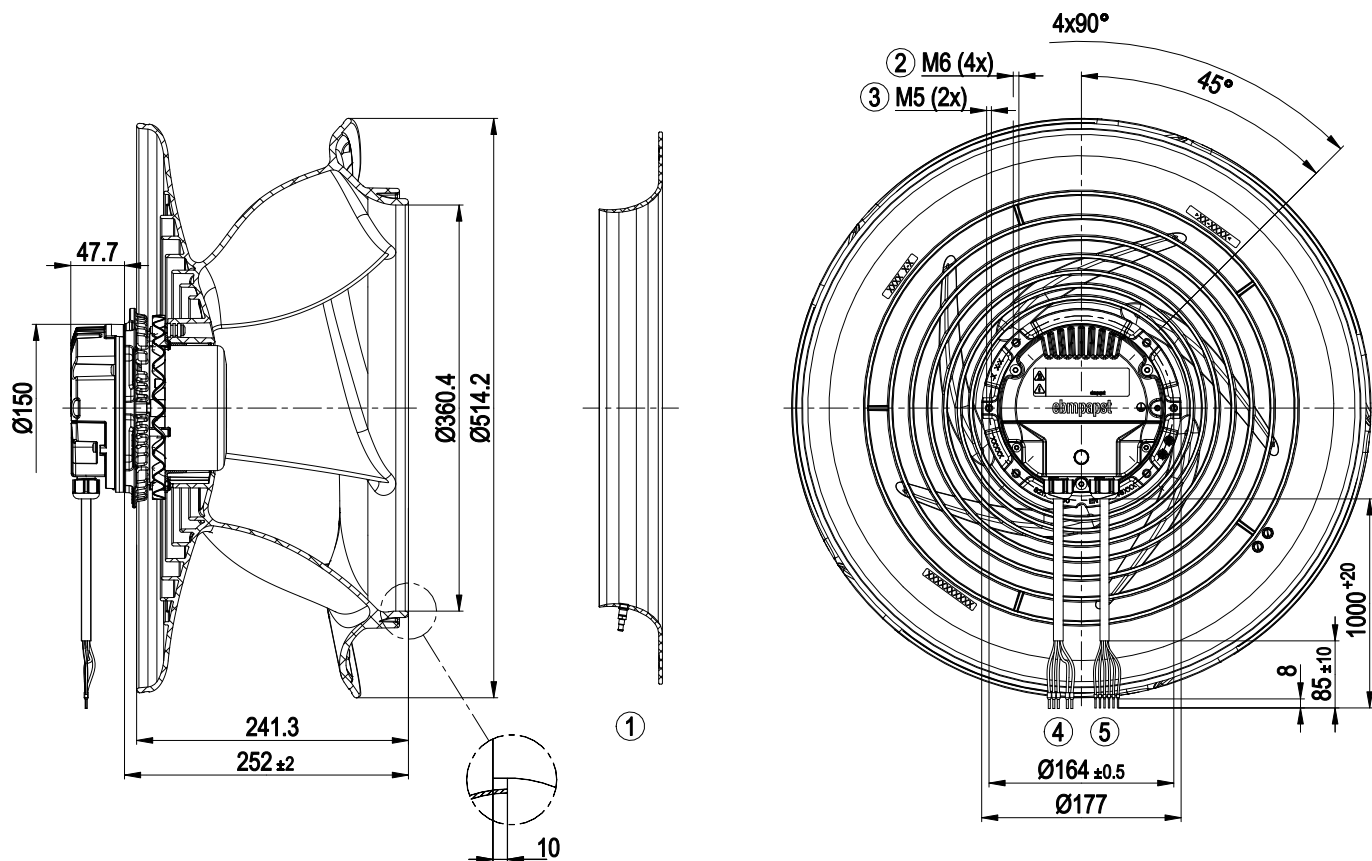

1	Accessory part: Inlet ring 8217102238 with pressure tap (k-factor: 290) (not included in scope of delivery)
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 10 mm The M5 tapped holes (2x) can be used to attach hoisting equipment.
4	Supply line (PWR) PVC AWG18 5x wire-end ferrule
5	Control wire (CTRL) PVC AWG22 6x wire-end ferrule


Accessory part

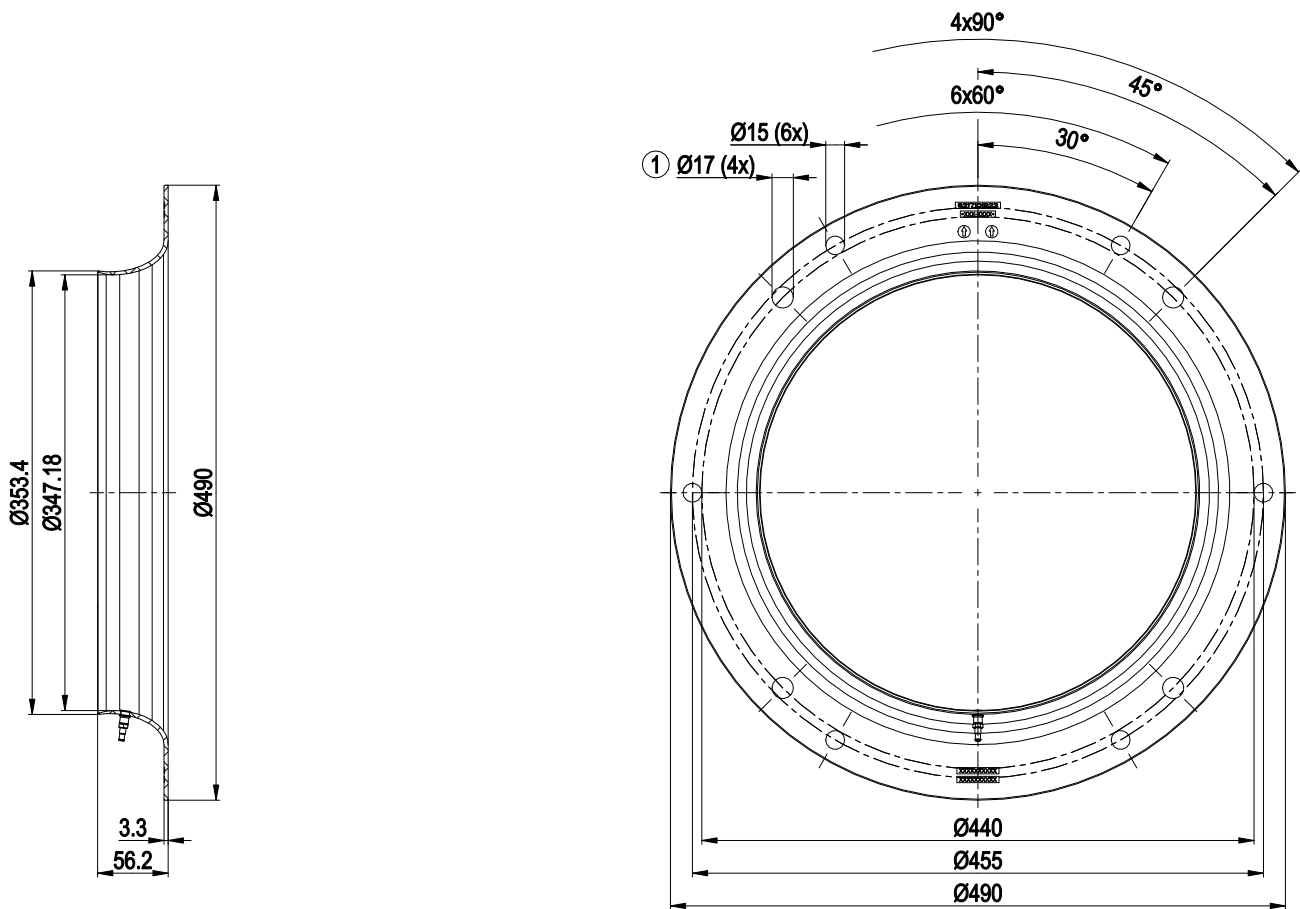

EC centrifugal fan - RadiPac

backward-curved, single-intake

Connection diagram




No.	Conn.	Designation	Color	Function/assignment
	PWR	PE	green/yellow	Protective earth
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	COM	orange	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	PWR	NC	orange	Status relay, floating status contact, break for failure
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV alternative: 15-30 VDC input for parameterization via MODBUS without line voltage
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable (see table Optional interface functions)
	CTRL	IO2	white	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable (see table Optional interface functions)
	CTRL	RSA	gray	RS-485 interface for MODBUS RSA, SELV dielectric strength to MODBUS RSB +/-14 V, dielectric strength to GND +/-7 V
	CTRL	RSB	brown	RS-485 interface for MODBUS RSB, SELV dielectric strength to MODBUS RSA +/-14 V, dielectric strength to GND +/-7 V
		LED		green: status = good, ready for operation orange: status = warning red: status = failure

Terminal/plug assignment

Medium (M2)		Functions and parameter description MODBUS V7.1		configurable IO mode		electrical specification		MODBUS Register for IO mode configuration		configurable IO functions: normal / inverse		
								IO mode configuration				
IO1	Dim1 (high active): digital input	active: applied voltage 3.5 - 50 VDC		D158 [0]		active: applied voltage 3.5 - 50 VDC		source: set value		D101 [...] source: set value		
		not active: pin open or applied voltage < 1.5 VDC		D158 [1]		active: applied voltage < 1.5 VDC		source: sensor value		D147 [...] source: sensor value		
		active: applied voltage < 1.5 VDC		D158 [2]		not active: pin open or applied voltage 3.5 - 50 VDC, SELV		switch: parameter set: #1 / #2		D104 [...] switch: parameter set: #1 / #2		
		not active: pin open or applied voltage 3.5 - 50 VDC, SELV		D158 [9]		RI = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1 k - 10 kHz, SELV		switch: control function: heating (pos.) / cooling (neg.)		D12E [...] switch: control function: heating (pos.) / cooling (neg.)		
IO2	Dim1 (low active): digital input	RI = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1 k - 10 kHz, SELV		D158 [9]		RI = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1 k - 10 kHz, SELV		switch: direction of rotation: cw / ccw		D148 [...] switch: direction of rotation: cw / ccw		
		active: applied voltage 3.5 - 50 VDC		D159 [0]		not active: pin open or applied voltage < 1.5 VDC, SELV		switch: fan enable / disable		D16A [...] switch: fan enable / disable		
		not active: pin open or applied voltage < 1.5 VDC		D159 [2]		RI = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1 k - 10 kHz, SELV		source: input pulses autoaddressing		D00C [1] source: input pulses autoaddressing		
		Umax = 50 VDC, Imax = 20 mA, SELV		D159 [5]		Umax = 50 VDC, Imax = 20 mA, SELV		source: DCI in		D638 [...] source: DCI in		
IO2	Tach out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV		D159 [6]		Umax = 50 VDC, Imax = 20 mA, SELV		signal: tach out		signal: tach out		
		Umax = 50 VDC, Imax = 20 mA, SELV		D159 [10]		Umax = 50 VDC, Imax = 20 mA, SELV		signal: diagnostics out		signal: diagnostics out		
		Umax = 50 VDC, Imax = 20 mA, SELV		D159 [11]		Umax = 50 VDC, Imax = 20 mA, SELV		signal: alarm out		signal: alarm out		
		Umax = 50 VDC, Imax = 20 mA, SELV		D159 [12]		Umax = 50 VDC, Imax = 20 mA, SELV		signal: output pulses autoaddressing		D130 [4] signal: output pulses autoaddressing		
RSA	RS485 bus connection		MODBUS RTU, parameter specification V7.1, SELV									
RSB	Relay		250 VAC / 2 A (AC1)									
COM	Relay		250 VAC / 2 A (AC1)									
NC	Voltage output		Voltage 10 VDC, SELV									
Vout	Alternatively: input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage		15 - 30 VDC									

○ configurable function
○ function to be activated via IO Mode

Curves: Air performance 50 Hz

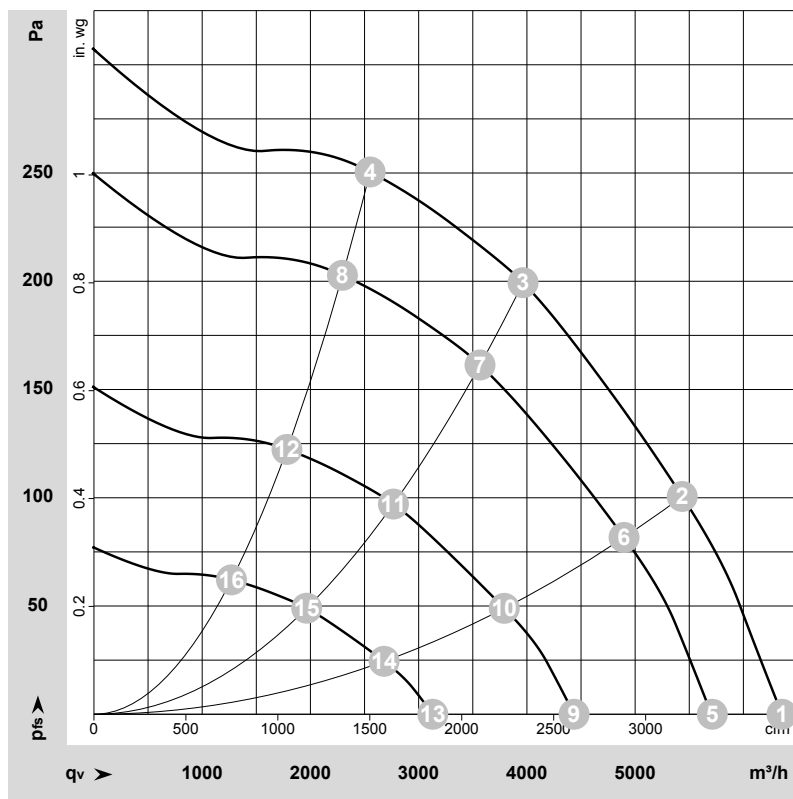

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-224474-1
Date: 2022-12-12
Nozzle: 8217101923

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	1~	230	50	1050	228	1.03	64	73	77	78	6355	0	3740	0.00
2	1~	230	50	1050	310	1.39	59	67	71	73	5435	100	3200	0.40
3	1~	230	50	1050	370	1.60	54	61	66	67	3965	200	2335	0.80
4	1~	230	50	1050	340	1.52	55	61	66	67	2550	250	1500	1.00
5	1~	230	50	945	169	0.77	62	71	75	76	5715	0	3365	0.00
6	1~	230	50	945	226	1.03	56	65	69	71	4895	82	2880	0.33
7	1~	230	50	945	264	1.19	51	58	64	65	3565	161	2100	0.65
8	1~	230	50	945	247	1.11	52	58	63	64	2295	203	1350	0.81
9	1~	230	50	735	84	0.43	58	66	70	71	4435	0	2610	0.00
10	1~	230	50	735	109	0.53	52	60	64	65	3790	49	2230	0.20
11	1~	230	50	735	126	0.60	47	53	58	60	2765	97	1630	0.39
12	1~	230	50	735	118	0.57	46	52	57	58	1785	122	1050	0.49
13	1~	230	50	525	36	0.27	48	56	63	64	3130	0	1840	0.00
14	1~	230	50	525	45	0.30	41	50	56	57	2680	24	1580	0.10
15	1~	230	50	525	50	0.31	37	46	54	55	1965	49	1155	0.20
16	1~	230	50	525	48	0.31	37	44	49	50	1270	62	745	0.25

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase