

8300100911
VBH0500CSPLS

EC centrifugal module - RadiPac

backward-curved, single-intake
with support bracket

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100911	
Motor	E09001-55	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1110
Power consumption	W	400
Current draw	A	2.5
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	71.4	47.3	09 Power consumption P_{ed}	kW	0.4
02 Measurement category		A		09 Air flow q_v	m ³ /h	4255
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	218
04 Efficiency grade N		86.1	62	10 Speed (rpm) n	min ⁻¹	1105
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

LU-224219

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100911

VBH0500CSPLS

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Technical description

Size	500 mm
Motor size	90
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Inlet nozzle material	ABS plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display with LED - Locked-rotor detection - Speed control - External 15-30 VDC input (parameterization) - Alarm relay - Configurable inputs/outputs (I/O) - Power limiter - MODBUS - Motor current limitation - PFC, passive - RS-485 MODBUS-RTU - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Lateral
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 61800-5-1; UKCA; CE
Approval	UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1

8300100911


VBH0500CSPLS

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Product drawing

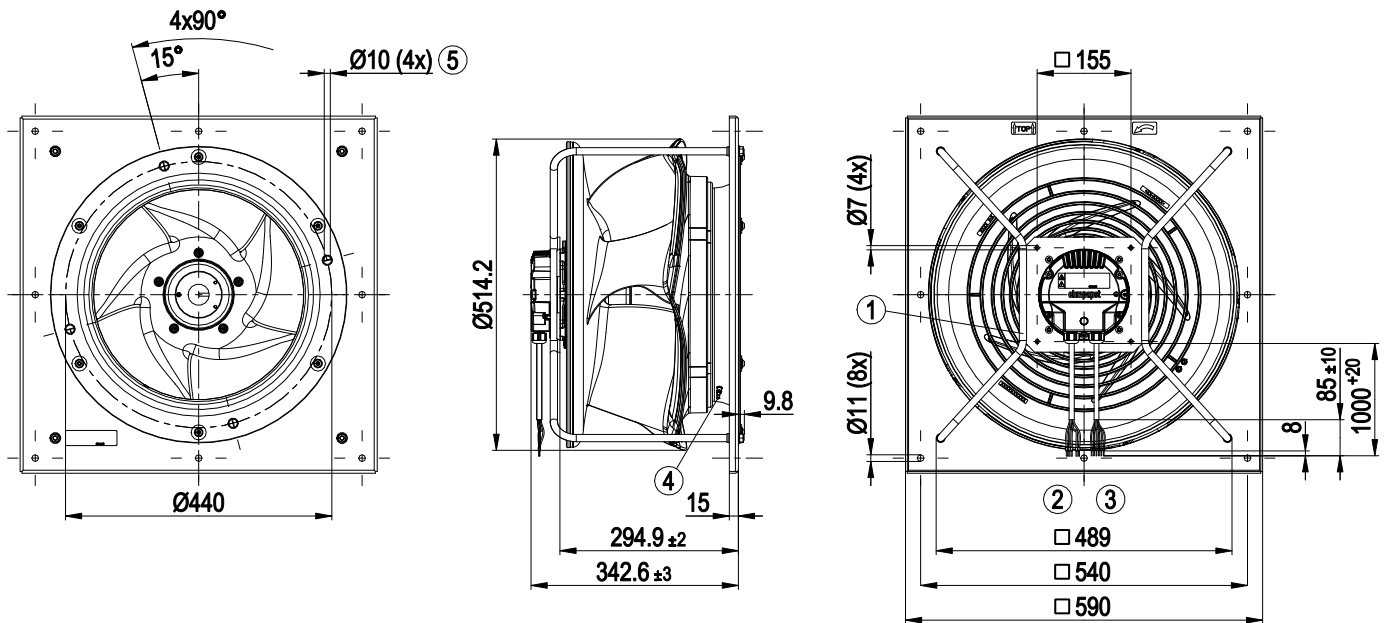

1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Supply line (PWR) PVC AWG18
	5x wire-end ferrule
3	Control wire (CTRL) PVC AWG22
	6x wire-end ferrule
4	Inlet ring with pressure tap (k-factor: 290)
5	Fastening holes for FlowGrid 35505-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required

8300100911


VBH0500CSPLS

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	PE	green/yellow	Protective earth
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	COM	orange	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	PWR	NC	orange	Status relay, floating status contact, break for failure
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV alternative: 15-30 VDC input for parameterization via MODBUS without line voltage
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable (see table Optional interface functions)
	CTRL	IO2	white	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable (see table Optional interface functions)
	CTRL	RSA	gray	RS-485 interface for MODBUS RSA, SELV dielectric strength to MODBUS RSB +/-14 V, dielectric strength to GND +/-7 V
	CTRL	RSB	brown	RS-485 interface for MODBUS RSB, SELV dielectric strength to MODBUS RSA +/-14 V, dielectric strength to GND +/-7 V
		LED		green: status = good, ready for operation orange: status = warning red: status = failure

VBH0500CSPLS

with support bracket

[illegible]

configurable IO functions: normal / inverse

MODBUS Register for IO mode configuration

IO1	◦ Din1 (high active): digital input	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D158 [0]
	◦ Din1 (low active): digital input	active: applied voltage < 1.5 VDC not active: pin open or applied voltage 3.5 - 50 VDC, SELV	D158 [1]
	◦ Ain1 0-10 V/PWM: analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{P_{NOM}} = 1 \text{ k} - 10 \text{ kHz}$, SELV	D158 [2]
	◦ Ain1 0-10 V/PWM (with pull up): analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{P_{NOM}} = 1 \text{ k} - 10 \text{ kHz}$, SELV	D158 [9]
	◦ Din1 (active high): digital input	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [0]
IO2	◦ Ain1 0-10 V/PWM: analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{P_{NOM}} = 1 \text{ k} - 10 \text{ kHz}$, SELV	D159 [2]
	◦ Tach out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [5]
	◦ Diagnostics out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [6]
	◦ Alarm out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [10]
	◦ Autodressing pulse output (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [11]
RSA RSB	◦ DCI-output (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [12]
	RS485 bus connection	MODBUS RTU, parameter specification V7.1, SELV	
COM NC	Relay	250 VAC / 2 A (AC1)	
Vout	Voltage output	Voltage 10 VDC, SELV	
	Alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	15 - 30 VDC	

- configurable function
- function to be activated via IO Mode

Functions and parameter description

8300100911


VBH0500CSPLS

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Curves: Air performance 50 Hz

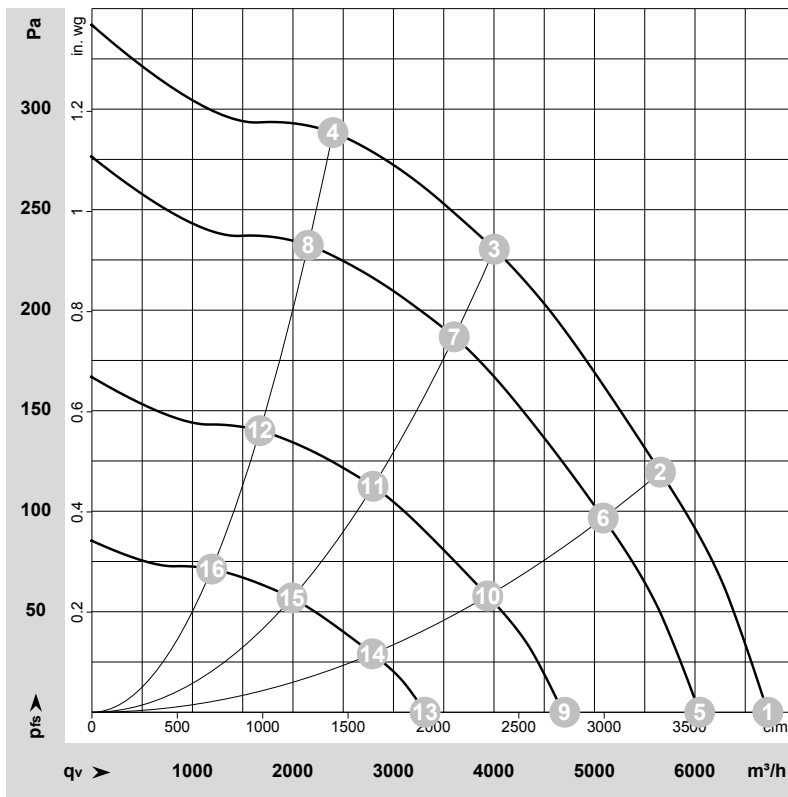

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-224219-1

Date: 2022-11-30

Nozzle: 8217101923

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	1110	269	1.71	67	74	78	80	6725	0	3960	0.00
2	1~	230	50	1110	353	2.20	61	69	73	74	5655	120	3330	0.48
3	1~	230	50	1110	400	2.50	55	62	67	68	4005	230	2355	0.92
4	1~	230	50	1110	367	2.28	56	63	68	69	2400	290	1410	1.16
5	1~	230	50	995	197	1.29	64	72	76	77	6045	0	3560	0.00
6	1~	230	50	995	258	1.65	58	66	70	72	5085	97	2995	0.39
7	1~	230	50	995	294	1.86	53	60	64	66	3605	187	2120	0.75
8	1~	230	50	995	266	1.70	54	60	65	66	2150	233	1265	0.94
9	1~	230	50	775	98	0.69	60	67	71	73	4705	0	2770	0.00
10	1~	230	50	775	125	0.85	54	61	65	67	3935	58	2315	0.23
11	1~	230	50	775	141	0.96	47	54	59	60	2795	113	1645	0.45
12	1~	230	50	775	129	0.88	47	54	58	60	1670	140	985	0.56
13	1~	230	50	555	41	0.32	50	58	65	65	3315	0	1950	0.00
14	1~	230	50	555	50	0.38	43	51	58	59	2790	29	1640	0.12
15	1~	230	50	555	56	0.42	39	46	53	54	1990	57	1170	0.23
16	1~	230	50	555	52	0.39	38	45	50	51	1190	71	700	0.29

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase