

8300101165
VBH0190SSLBS

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101165	
Motor	E06001-10	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	3400
Power consumption	W	85
Current draw	A	0.7
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

8300101165
VBH0190SSLBS

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

Technical description


Size	190 mm
Motor size	60
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Housing material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; CE; UKCA
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

8300101165
VBH0190SSLBS

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

Product drawing

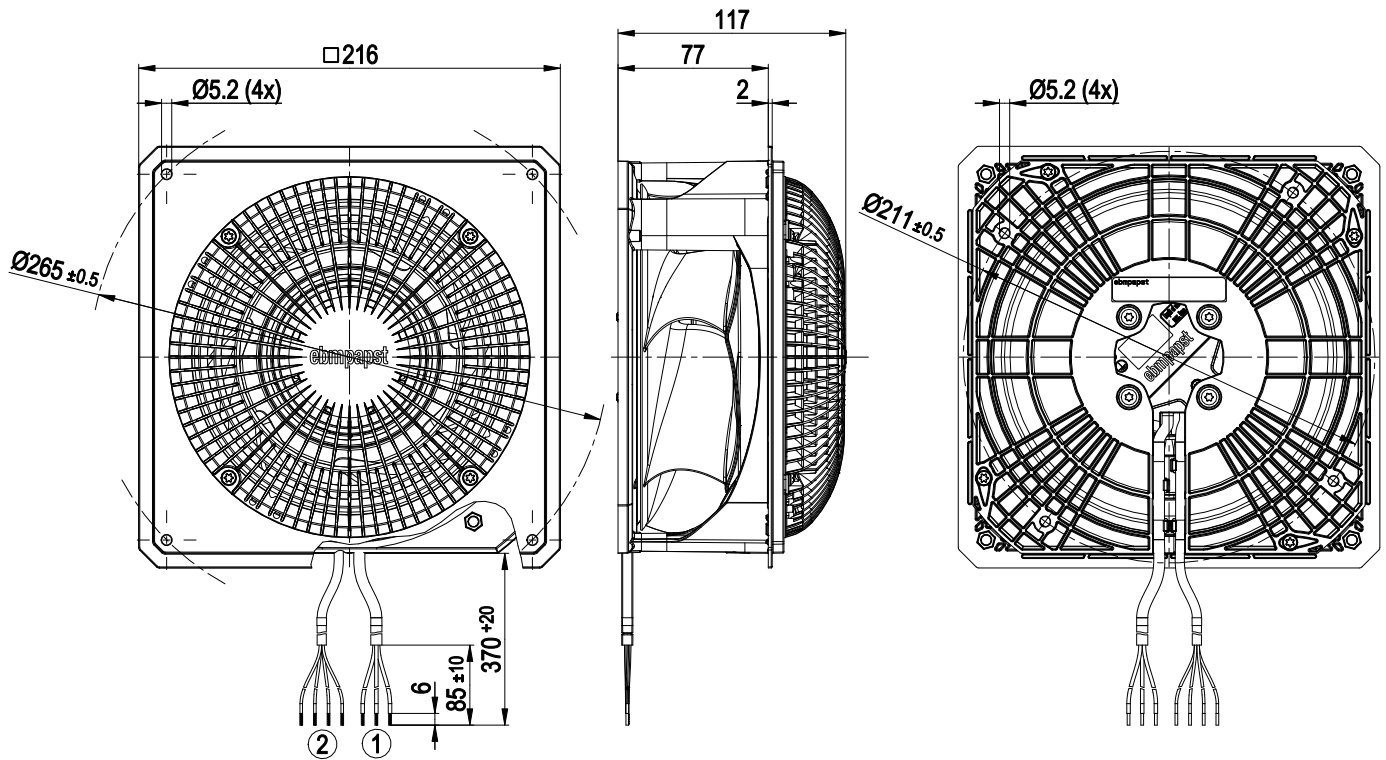


1	Supply line (PWR) PVC AWG20
	3x splice
2	Control wire (CTRL) PVC AWG22
	4x splice

EC centrifugal module - RadiCal


backward-curved, single-intake
with housing

Mounting dimensions

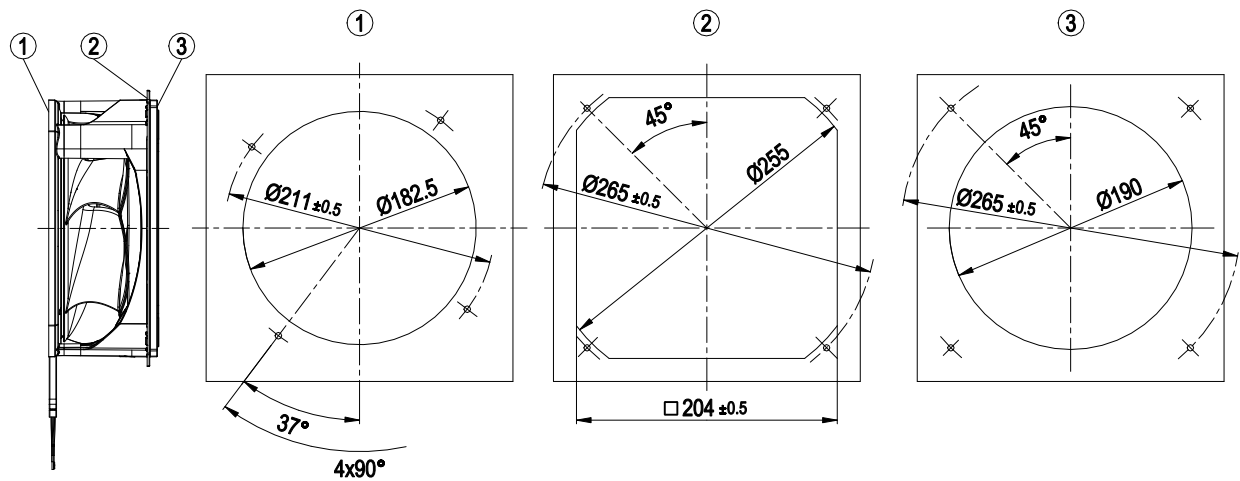

- | | |
|---|---|
| 1 | Installation of motor plate |
| 2 | Installation of nozzle plate on outlet side |
| 3 | Installation of nozzle plate on intake side |

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=1.1 mA Not short-circuit-proof, power supply for external devices, SELV

8300101165
VBH0190SSLBS

EC centrifugal module - RadiCal

backward-curved, single-intake

with housing

Terminal/plug assignment


		electrical specification		configurable IO mode		INPUT		OUTPUT			
IO1	Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1k..10 kHz, SELV		Ain1 0-10 V/PWM: analog input		switch: parameter set: #1 / #2	○	configurable function	○	signal: tach out	○
						switch: direction of rotation: cw / ccw	○	switch: enable/disable input	○	signal: diagnostics out	○
										signal: alarm out	○
										signal: run monitoring	○
										signal: status	○
IO2	Tach out (open collector) Diagnostics out (open collector) Alarm out (open collector) Open collector	U _{max} =50 VDC, I _{max} =10 mA, SELV U _{max} =50 VDC, I _{max} =10 mA, SELV U _{max} =50 VDC, I _{max} =10 mA, SELV U _{max} =50 VDC, I _{max} =10 mA, SELV				source: set value	○	signal: configurable function	○	signal: configurable function	○
Vout	Voltage output	Voltage 10 VDC, SELV									

Basic (B4)

Factory configuration option upon request

○ Factory configuration option

Curves: Air performance 50 Hz

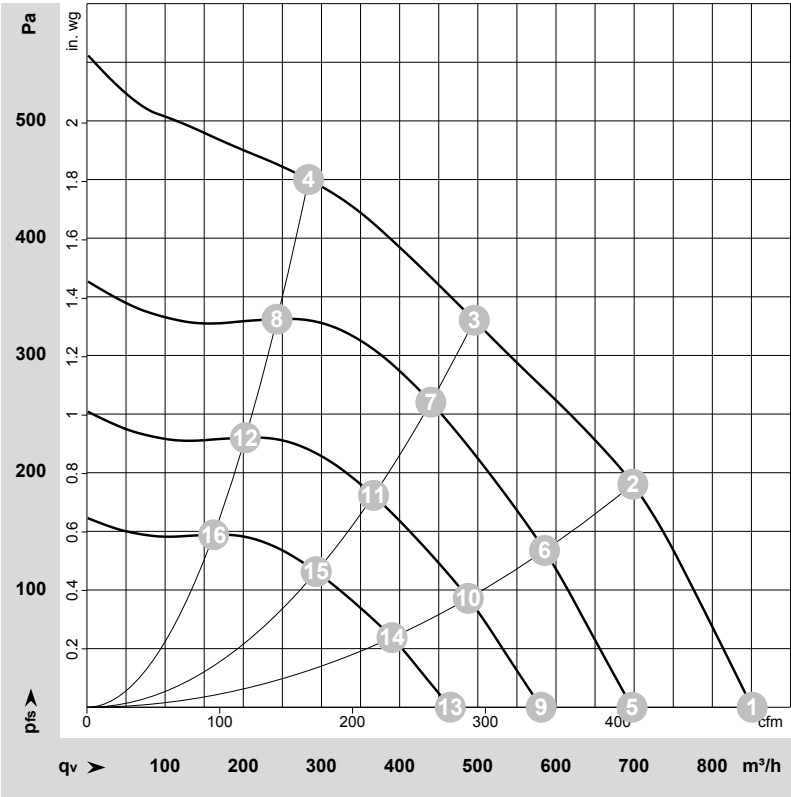

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-227293-1
Date: 2023-06-15
Nozzle: 8217116915

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	3660	66	0.56	64	72	850	0	500	0.00
2	1~	230	50	3580	85	0.70	60	69	700	190	410	0.76
3	1~	230	50	3400	85	0.70	58	66	495	330	290	1.32
4	1~	230	50	3500	85	0.70	66	75	285	450	165	1.81
5	1~	230	50	3000	37	0.31	59	67	695	0	410	0.00
6	1~	230	50	3000	51	0.41	56	64	585	135	345	0.54
7	1~	230	50	3000	62	0.50	55	63	440	260	260	1.04
8	1~	230	50	3000	55	0.45	62	71	245	331	145	1.33
9	1~	230	50	2500	21	0.18	55	63	580	0	340	0.00
10	1~	230	50	2500	29	0.24	51	59	490	93	285	0.37
11	1~	230	50	2500	36	0.29	50	59	365	181	215	0.73
12	1~	230	50	2500	32	0.26	58	66	205	230	120	0.92
13	1~	230	50	2000	11	0.09	49	57	465	0	275	0.00
14	1~	230	50	2000	15	0.12	45	54	390	60	230	0.24
15	1~	230	50	2000	18	0.15	45	53	295	116	170	0.47
16	1~	230	50	2000	16	0.13	52	61	160	147	95	0.59

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase