

8300101193
VBH0225SSLES

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101193	
Motor	E06002-23	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2900
Power consumption	W	120
Current draw	A	1.0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

8300101193
VBH0225SSLES

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

Technical description


Weight	2,14
Size	225 mm
Motor size	60
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Housing material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE; UKCA
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.

8300101193
VBH0225SSLES

EC centrifugal module - RadiCal


backward-curved, single-intake
with housing

Product drawing

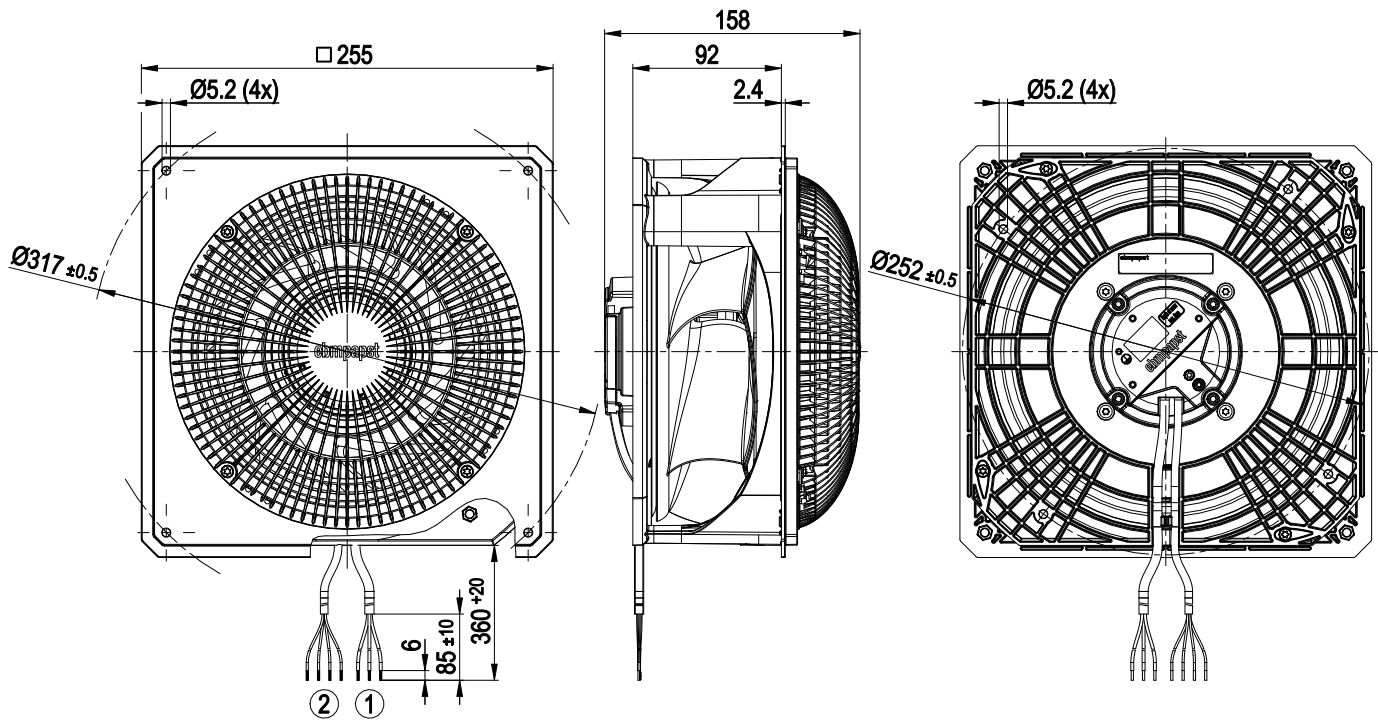


1	Supply line (PWR) PVC AWG20
	3x splice
2	Control wire (CTRL) PVC AWG22
	4x splice

Mounting dimensions

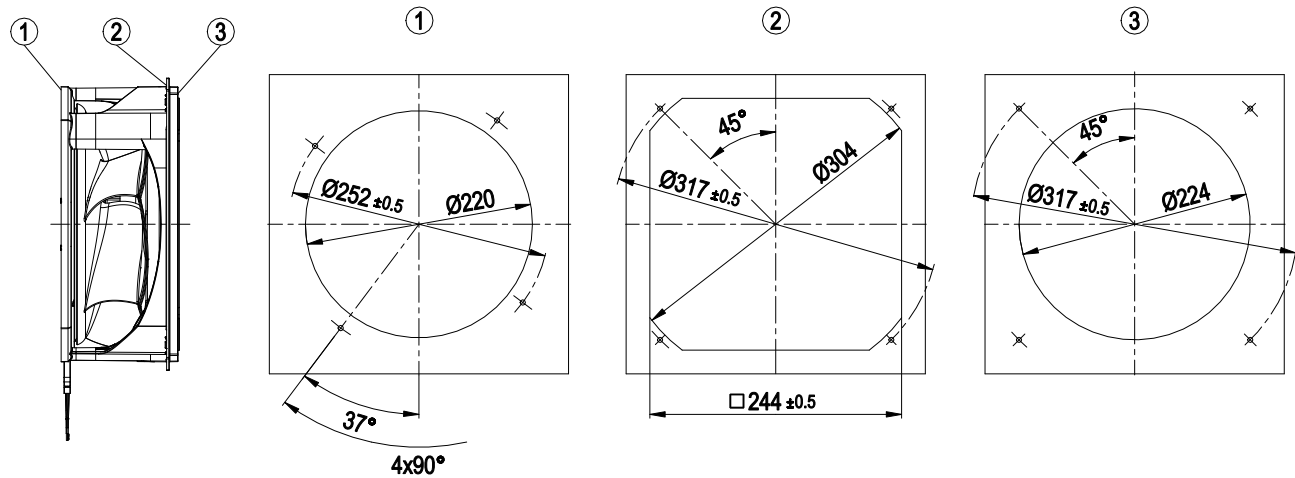

1	Installation of motor plate
2	Installation of nozzle plate on outlet side
3	Installation of nozzle plate on intake side

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV

8300101193
VBH0225SSLES

EC centrifugal module - RadiCal

backward-curved, single-intake

with housing

Terminal/plug assignment


		electrical specification		configurable IO mode		INPUT		OUTPUT			
IO1	Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1k..10 kHz, SELV		Ain1 0-10 V/PWM: analog input		switch: parameter set: #1 / #2	○	configurable function	○	signal: tach out	○
						switch: direction of rotation: cw / ccw	○	switch: enable/disable input	○	signal: diagnostics out	○
										signal: alarm out	○
										signal: run monitoring	○
										signal: status	○
IO2	Tach out (open collector) Diagnostics out (open collector) Alarm out (open collector) Open collector	U _{max} =50 VDC, I _{max} =10 mA, SELV U _{max} =50 VDC, I _{max} =10 mA, SELV U _{max} =50 VDC, I _{max} =10 mA, SELV U _{max} =50 VDC, I _{max} =10 mA, SELV				source: set value	○	signal: configurable function	○	signal: configurable function	○
Vout	Voltage output	Voltage 10 VDC, SELV									

Basic (B4)

Factory configuration option upon request

○ Factory configuration option

Curves: Air performance 50 Hz

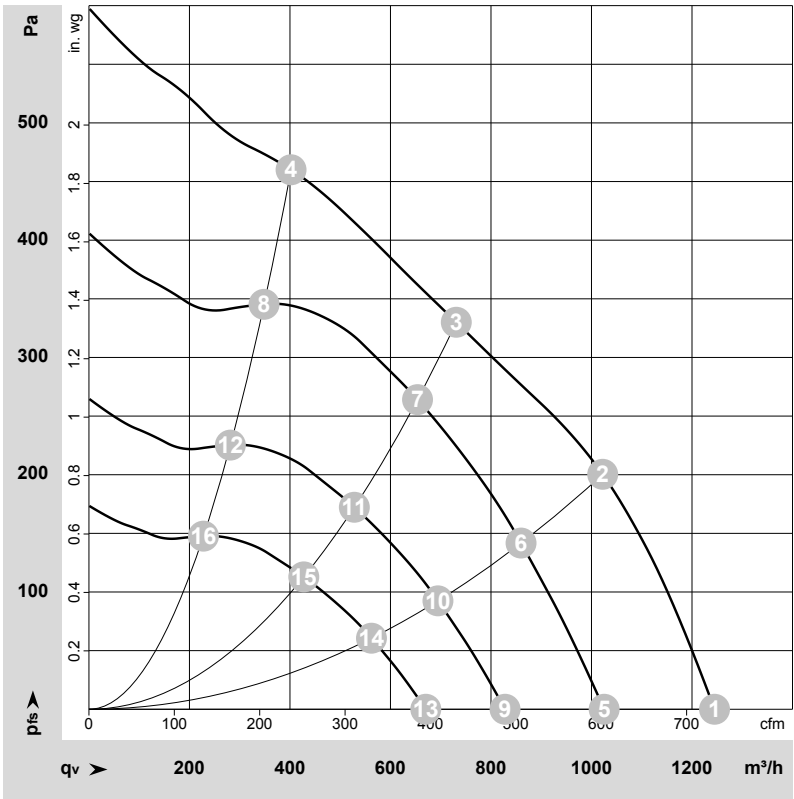

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-227548-1
Date: 2023-07-03
Nozzle: 8217118359

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _V	p _{fs}	q _V	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	3155	92	0.79	64	73	1245	0	735	0.00
2	1~	230	50	3095	120	1.00	61	70	1020	200	600	0.80
3	1~	230	50	2900	120	1.00	58	67	730	330	430	1.32
4	1~	230	50	3000	120	1.00	68	76	400	460	235	1.85
5	1~	230	50	2600	52	0.44	59	68	1025	0	605	0.00
6	1~	230	50	2600	73	0.61	57	66	860	142	505	0.57
7	1~	230	50	2600	87	0.73	56	65	655	265	385	1.06
8	1~	230	50	2600	80	0.67	64	73	350	345	205	1.39
9	1~	230	50	2100	27	0.23	54	63	830	0	485	0.00
10	1~	230	50	2100	38	0.32	51	60	695	92	410	0.37
11	1~	230	50	2100	46	0.38	50	59	530	173	310	0.69
12	1~	230	50	2100	42	0.35	59	67	280	225	165	0.90
13	1~	230	50	1700	14	0.12	49	57	670	0	395	0.00
14	1~	230	50	1700	20	0.17	46	55	560	61	330	0.24
15	1~	230	50	1700	24	0.20	45	54	430	113	250	0.45
16	1~	230	50	1700	22	0.19	53	62	230	148	135	0.59

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_V = Air flow · p_{fs} = Pressure increase