

8300101212
VBF0560CTTRS

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design

ebm-papst Mulfingen GmbH & Co. KGaA & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101212	
Motor	E15034-120	

Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	2370
Power consumption	W	6500
Current draw	A	10
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	75.5	59.9	09 Power consumption P_{ed}	kW	6.32
02 Measurement category		A		09 Air flow q_v	m³/h	14165
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	1172
04 Efficiency grade N		77.6	62	10 Speed (rpm) n	min ⁻¹	2370
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-215301

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300101212
VBF0560CTTRS

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design

Technical description

Size	560 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Spacer material	Aluminum
Inlet nozzle material	ABS plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.4 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection - Vibration sensor
Power Factor Correction (PFC)	Passive (through low-capacitance DC link)
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection

8300101212
VBF0560CTTRS

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design


Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1

8300101212
VBF0560CTTRS

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design

Product drawing

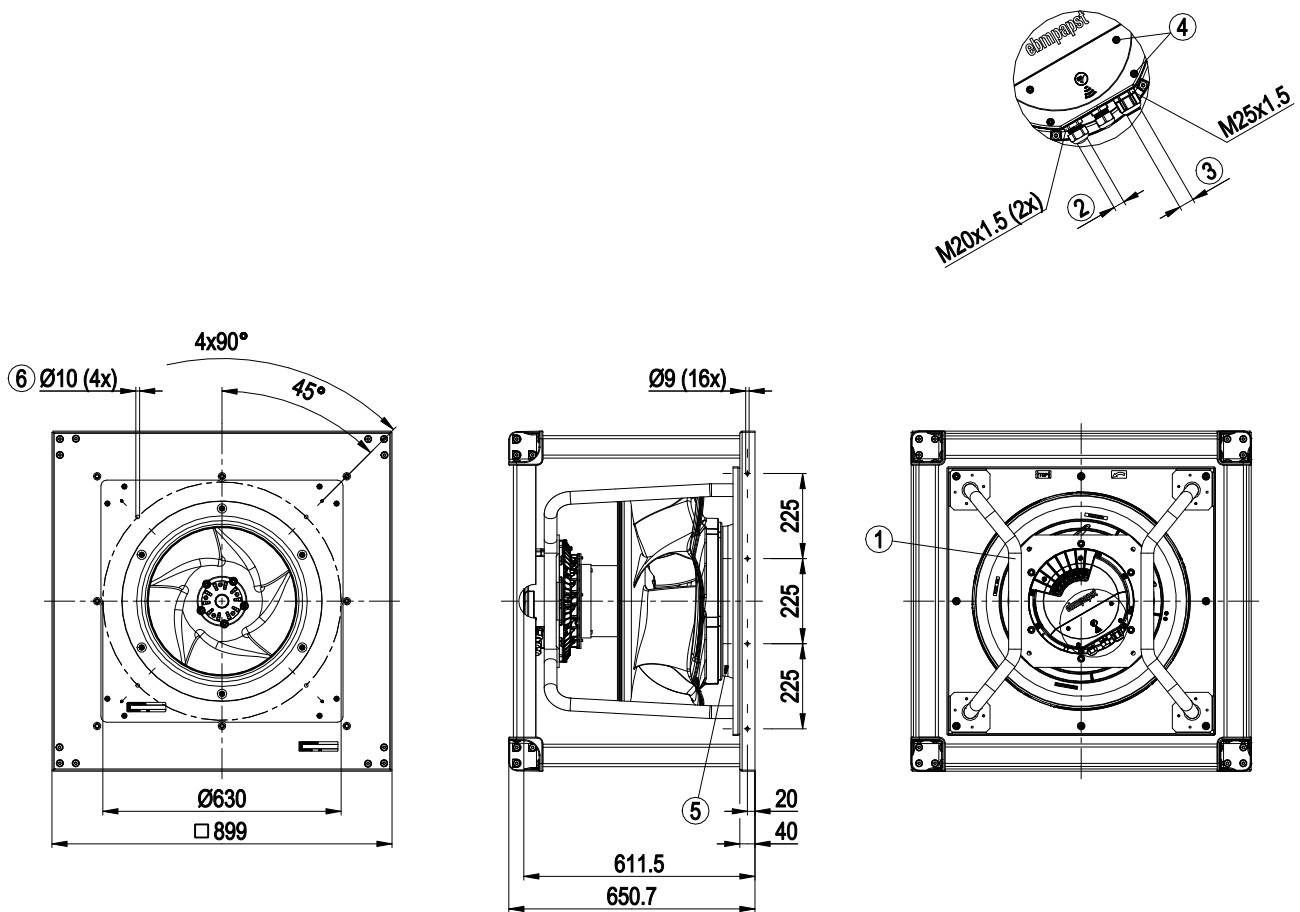





1	Installation position: Shaft horizontal (only install support struts vertically as illustrated)
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm
3	Cable diameter min. 5 mm, max. 14 mm, tightening torque 6 ± 0.9 Nm
	(The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
4	Tightening torque 3 ± 0.3 Nm
5	Inlet ring with pressure tap (k-factor: 381)
6	Attachment holes for FlowGrid 50710-2-2957 (not included in scope of delivery)

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design

Accessory part

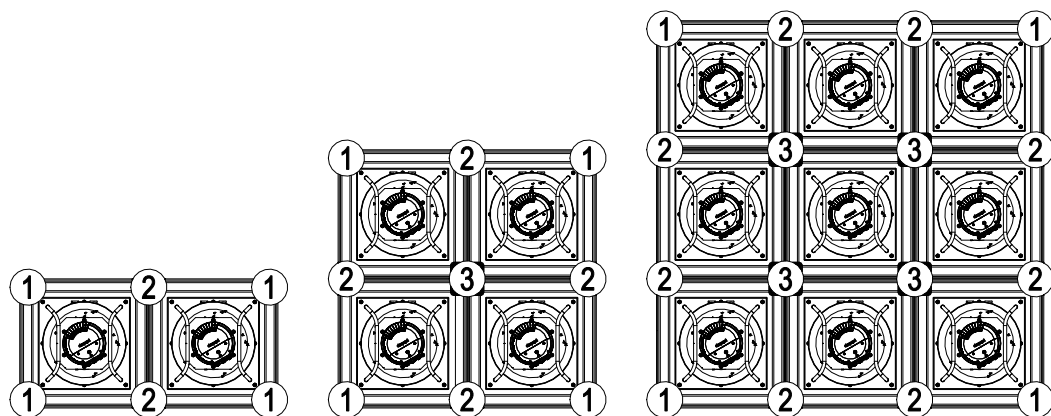

① 	4x	4x	4x
② 	2x	4x	8x
③ 	-	1x	4x

1 Angle connector 93570-2-4060 for fastening to the floor, wall, or ceiling

2 Side connector 93572-2-4060 for fastening to the floor, wall, ceiling, or additional FanGrid fan

3 Cross connector 93574-2-4060

The angle, side and cross connectors are fastened with the screws already present on the fan in the corner connectors. The screws have to be fitted by hand and secured with a tightening torque of 30 ± 4.5 Nm. Screws for fastening to the floor, wall, or ceiling are not included in scope of delivery.



There are four holes on each edge of the flange plate for screws. These holes must also be used for fastening to the floor, wall, ceiling or adjacent fans. Use M8 or 8 mm diameter screws and, if necessary, screw anchors of sufficient size and strength that the fan assembly cannot come loose even under heavy load.

Maximum height: 5 FanGrid fans vertically. The assembly must be at least as wide as it is high. Example:
3 FanGrid fans vertically = at least 3 FanGrid fans horizontally.

In a structure of one FanGrid fan in height and several FanGrid fans wide, the FanGrid fans must be screwed to the floor, the ceiling and the adjacent FanGrid fans.

For a height of two or more FanGrid fans, the FanGrid fans must be screwed to the floor, the ceiling, the wall and the adjacent FanGrid fans.

Fitting instructions

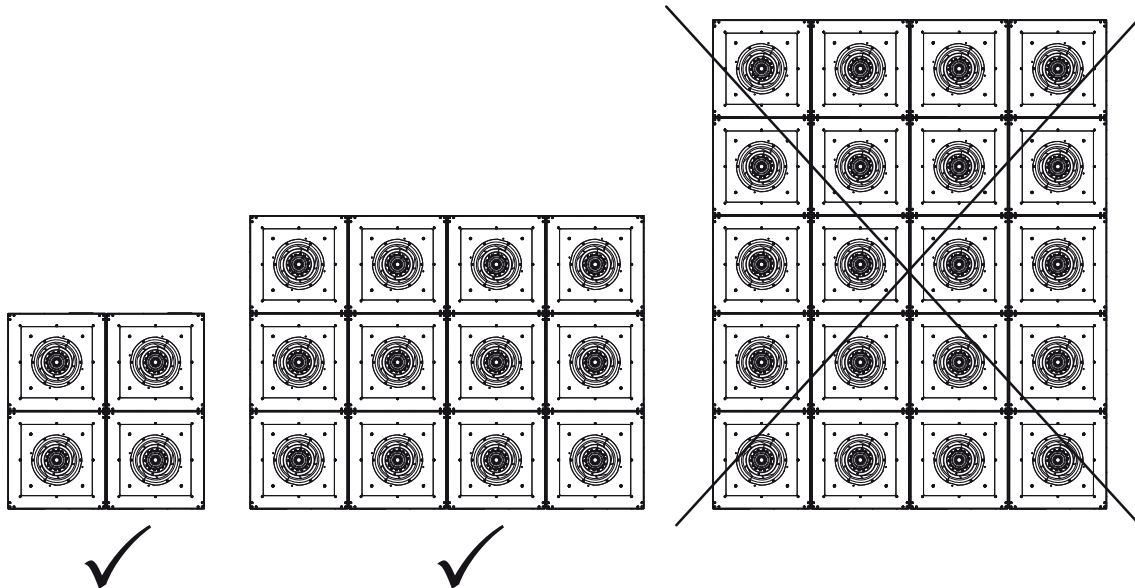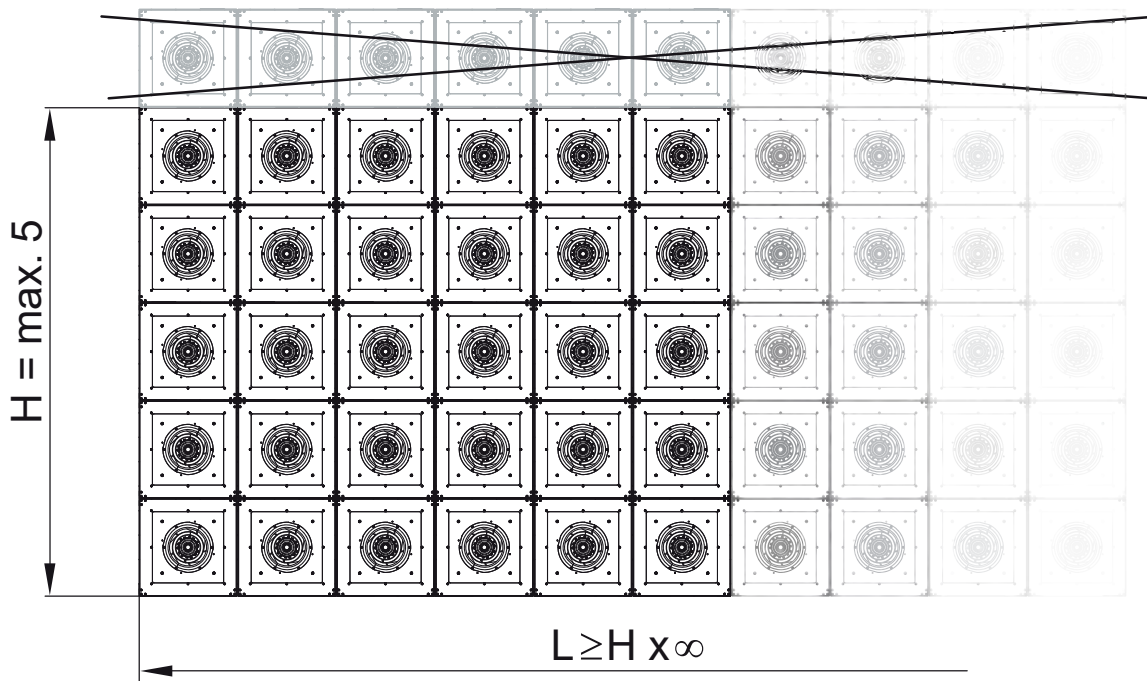

Assembled FanGrids may not be transported.

There is a risk that the assembly could fall over or be damaged.

If it is not possible to mount the fan combination to the floor, wall and ceiling, the fan combination must be mounted in an auxiliary construction that is suitably stable.

The construction in which the fans are mounted must have sufficient strength to bear any loads that may occur over the entire service life.


In order to avoid heavy loads due to the composite bending, from a height of four fans and a width of four fans, a consistent, vertical strut must be installed approximately in the center.

From a width of six fans, a corresponding number of additional vertical struts must be installed. The struts can be attached to both the intake and the delivery side. The trim between the fans and the wall or ceiling (as bulkhead) must not be used as a supporting element.

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design

Connection diagram

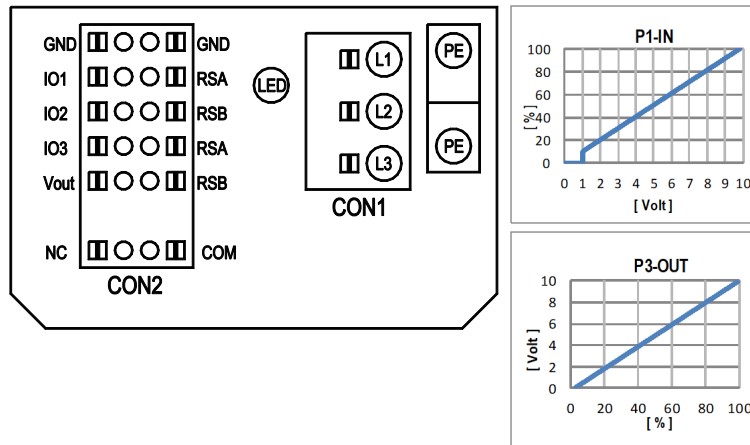


No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Actual speed Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

Terminal/plug assignment

○ configurable option		configurable IO functions: normal / inverse																																																																																																																																																																																																																																																																																																																																																																																																																																													
For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.4																																																																																																																																																																																																																																																																																																																																																																																																																																															
CON2	configurable IO mode	electrical specification	MODBUS Register for IO mode configuration	source: set value	D101 [...]	D147 [...]	D104 [...]	D12E [...]	D148 [...]	D16C [...]	D16A [...]	(selected directly via IO mode)	D130 [0]	D130 [1]	D130 [2]	D130 [5]	D00C [1]	D130 [4]																																																																																																																																																																																																																																																																																																																																																																																																																													
					source: sensor value	switch: parameter set: #1 / #2	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	switch: set value source	switch: fan enable / disable	signal: tach out	signal: diagnostics out	signal: fan modulation level %	signal: actual speed	signal: system modulation level %	signal: remote control output 0-10V	pulse input for auto-addressing	pulse output for auto-addressing																																																																																																																																																																																																																																																																																																																																																																																																																													
					○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																																										
					○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																																										
IO1	Din1 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	D158 [0]	source: set value	D158 [2]	D158 [5]	D158 [6]	D159 [0]	D159 [2]	D159 [3]	D15A [0]	D15A [1]	D15A [7]	D15A [8]	D15A [4]	D15A [5]	D15A [6]	D16E [...]																																																																																																																																																																																																																																																																																																																																																																																																																													
					RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz, SELV	Umax = 50VDC, Imax = 20mA, SELV	Umax = 50VDC, Imax = 20mA, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz, SELV	RI = 125R, characteristic curve parameterizable, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	active: applied voltage < 1.5VDC, SELV not active: pin open or applied voltage 3.5-50VDC	PWM = 40Hz - 10KHz, characteristics parameterizable	active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	40Hz - 10KHz, characteristics parameterizable	active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1.5VDC, SELV	function parameterizable, max. 5mA max output frequency 300Hz, SELV	0-10Vmax. 5mA max output frequency 300Hz, SELV	0-10Vmax. 5mA max output frequency 300Hz, SELV	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV																																																																																																																																																																																																																																																																																																																																																																																																																											
					○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																																										
					○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																																									
IO2	Din2 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	D159 [0]	source: set value	D159 [2]	D159 [3]	D15A [0]	D15A [1]	D15A [7]	D15A [8]	D15A [4]	D15A [5]	D15A [6]	D16E [...]																																																																																																																																																																																																																																																																																																																																																																																																																																	
					RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz, SELV	RI = 125R, characteristic curve parameterizable, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	active: applied voltage < 1.5VDC, SELV not active: pin open or applied voltage 3.5-50VDC	PWM = 40Hz - 10KHz, characteristics parameterizable	active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	40Hz - 10KHz, characteristics parameterizable	active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1.5VDC, SELV	function parameterizable, max. 5mA max output frequency 300Hz, SELV	0-10Vmax. 5mA max output frequency 300Hz, SELV	0-10Vmax. 5mA max output frequency 300Hz, SELV	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV																																																																																																																																																																																																																																																																																																																																																																																																																															
					○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																																										
					○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																																									
IO3	Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	D15A [0]	source: set value	D15A [2]	D15A [3]	D15A [4]	D15A [5]	D15A [6]	D16E [...]																																																																																																																																																																																																																																																																																																																																																																																																																																					
					RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz, SELV	RI = 125R, characteristic curve parameterizable, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	active: applied voltage < 1.5VDC, SELV not active: pin open or applied voltage 3.5-50VDC	PWM = 40Hz - 10KHz, characteristics parameterizable	active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	40Hz - 10KHz, characteristics parameterizable	active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1.5VDC, SELV	function parameterizable, max. 5mA max output frequency 300Hz, SELV	0-10Vmax. 5mA max output frequency 300Hz, SELV	0-10Vmax. 5mA max output frequency 300Hz, SELV	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV																																																																																																																																																																																																																																																																																																																																																																																																																															
					○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																																									
					○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																																								
IO3	PWMIn3: digital input idle level high	PWM = 40Hz - 10KHz, characteristics parameterizable	D15A [7]	source: set value	D15A [8]	D15A [4]	D15A [5]	D15A [6]	D16E [...]																																																																																																																																																																																																																																																																																																																																																																																																																																						
					active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	40Hz - 10KHz, characteristics parameterizable	active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1.5VDC, SELV	function parameterizable, max. 5mA max output frequency 300Hz, SELV	0-10Vmax. 5mA max output frequency 300Hz, SELV	0-10Vmax. 5mA max output frequency 300Hz, SELV	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV																																																																																																																																																																																																																																																																																																																																																																																																																																				
					○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Curves: Air performance 50 Hz

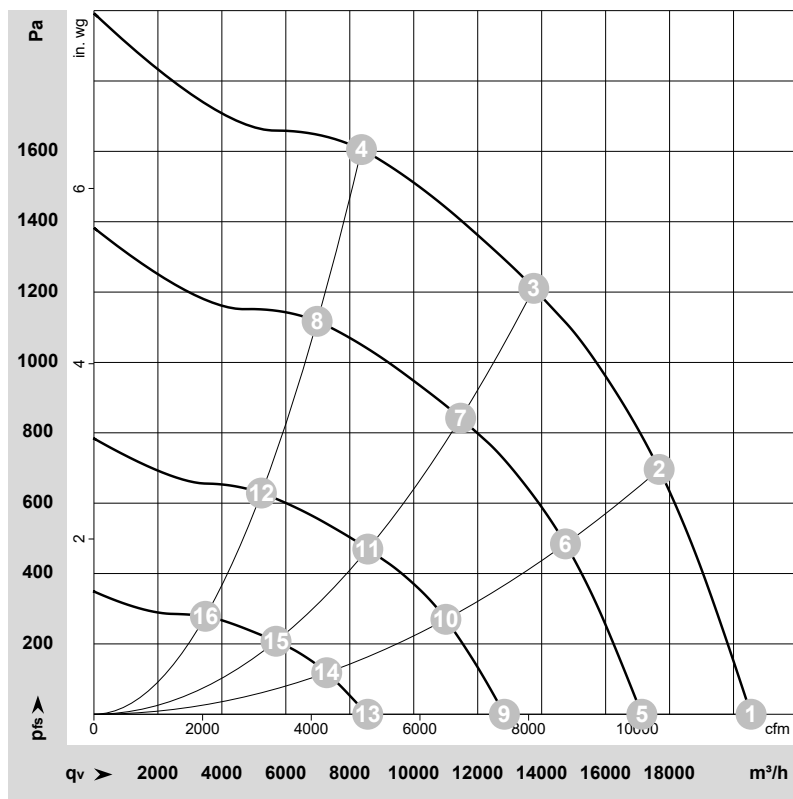

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-215301-1
Date: 2021-07-27
Nozzle: 8217101924

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	3~	400	50	2370	4002	6.28	87	95	98	100	20550	0	12095	0.00
2	3~	400	50	2370	5793	8.93	81	89	92	94	17675	700	10405	2.81
3	3~	400	50	2370	6500	10.00	76	84	89	90	13755	1200	8095	4.82
4	3~	400	50	2370	5991	9.26	80	86	91	92	8365	1600	4925	6.42
5	3~	400	50	1975	2374	4.12	82	91	94	96	17135	0	10085	0.00
6	3~	400	50	1975	3402	5.57	76	84	88	89	14745	485	8675	1.95
7	3~	400	50	1975	3720	6.02	72	79	84	85	11465	842	6750	3.38
8	3~	400	50	1975	3519	5.74	76	82	87	88	6980	1118	4110	4.49
9	3~	400	50	1485	1092	2.40	75	83	86	88	12835	0	7555	0.00
10	3~	400	50	1480	1529	3.01	69	77	80	82	11005	270	6480	1.08
11	3~	400	50	1485	1655	3.18	65	72	77	78	8565	469	5040	1.88
12	3~	400	50	1480	1567	3.06	66	73	79	80	5235	629	3080	2.53
13	3~	400	50	985	401	1.22	66	74	78	79	8560	0	5040	0.00
14	3~	400	50	985	519	1.45	58	67	71	73	7280	118	4285	0.47
15	3~	400	50	985	558	1.52	55	63	68	69	5695	208	3350	0.84
16	3~	400	50	985	534	1.48	56	62	67	68	3485	280	2050	1.12

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase