

8300101295
VVY0500CSNFS

EC axial panel fan - AxiEco

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data


Item	8300101295	
Motor	E07432-29	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	630
Power consumption	W	85
Current draw	A	0.7
Max. back pressure	Pa	48
Max. back pressure	in. wg	0.19
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Technical description


Size	500 mm
Motor size	74
Rotor surface	Galvanized
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic, galvanized sheet-metal plate
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; UKCA; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.

Product drawing

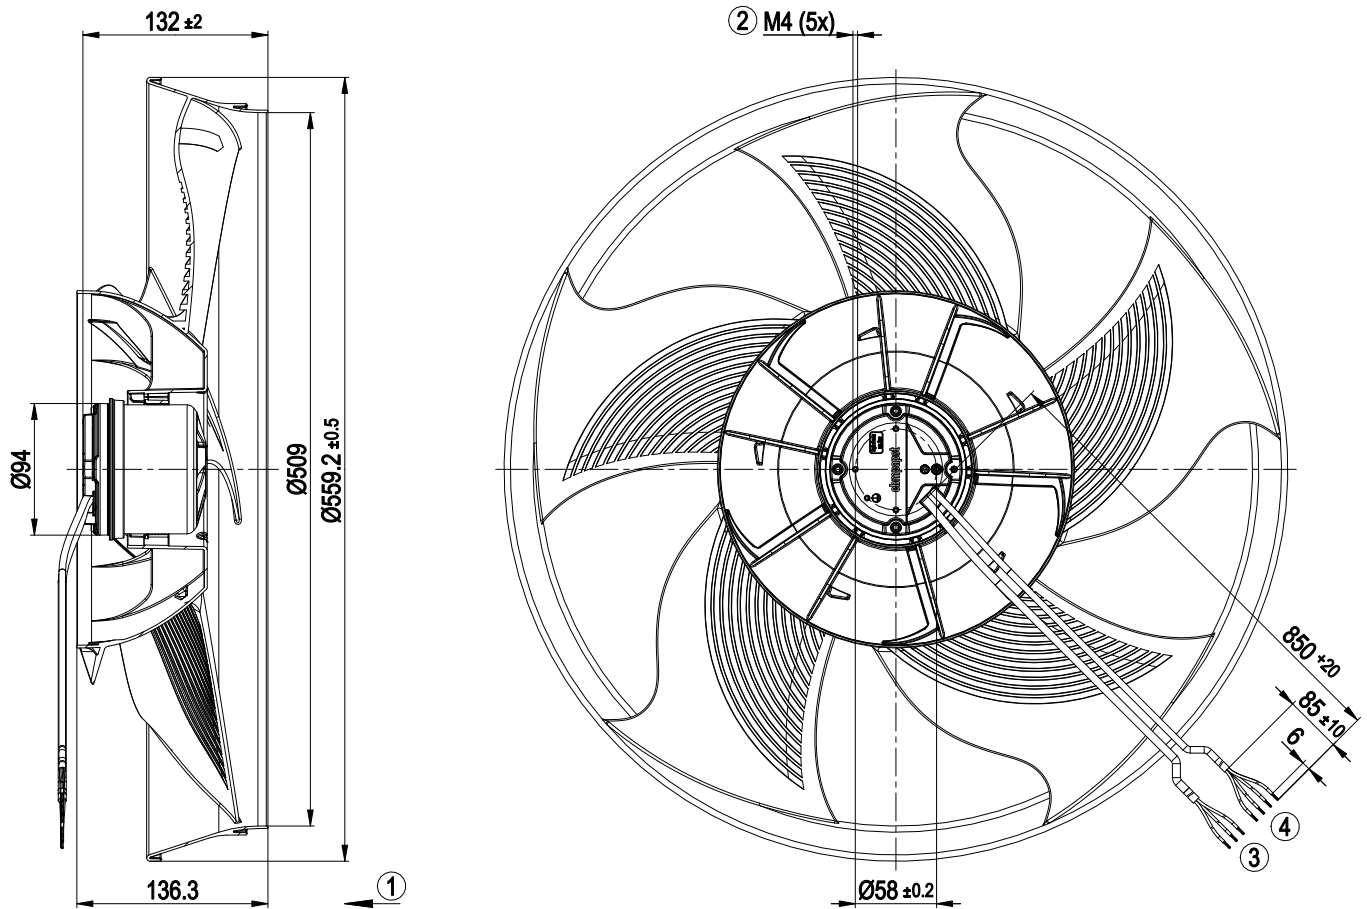

1	Airflow direction "V"
2	Max. clearance for screw 5 mm
3	Supply line (PWR) PVC AWG20 3x splice
4	Control wire (CTRL) PVC AWG22 4x splice

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=1.1 mA Not short-circuit-proof, power supply for external devices, SELV


Terminal/plug assignment

	configurable IO mode	electrical specification	INPUT		OUTPUT					
			switch: parameter set: #1 / #2	switch: direction of rotation: cw / ccw	switch: enable/disable input	configurable function	signal: tach out	signal: diagnostics out	signal: alarm out	signal: run monitoring
IO1	Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV	○	○	○					signal: status
	Ain1 0-10 V/PWM: analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{\text{PWM}} = 1\text{k}..10\text{ kHz}$, SELV	○		○					signal: configurable function
IO2	Tach out (open collector)	Umax=50 VDC, Imax=10 mA, SELV					○			
	Diagnostics out (open collector)	Umax=50 VDC, Imax=10 mA, SELV						○		
	Alarm out (open collector)	Umax=50 VDC, Imax=10 mA, SELV							○	
	Open collector	Umax=50 VDC, Imax=10 mA, SELV								○
Vout	Voltage output	Voltage 10 VDC, SELV								

Basic (B4)
Factory configuration option upon request

○ Factory configuration option

Curves: Air performance 50 Hz

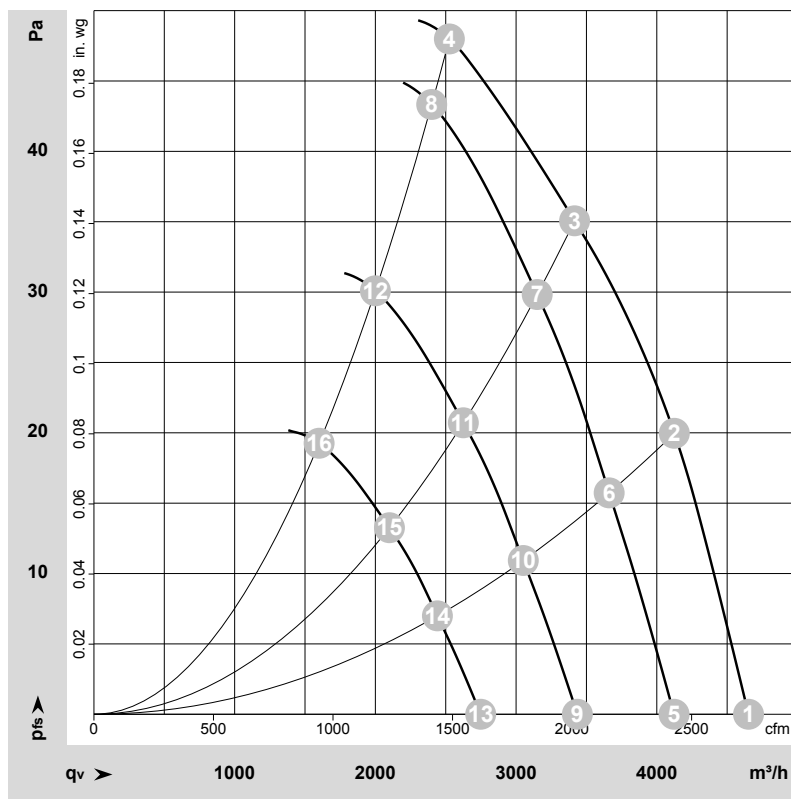

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-229096-1
Date: 2023-10-12
Nozzle: 50100-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	1~	230	50	675	66	0.55	54	61	62	65	4650	0	2740	0.00
2	1~	230	50	675	82	0.67	51	58	60	62	4125	20	2430	0.08
3	1~	230	50	650	85	0.70	49	56	58	60	3415	35	2010	0.14
4	1~	230	50	630	85	0.70	48	56	58	60	2525	48	1485	0.19
5	1~	230	50	600	46	0.39	51	58	59	62	4125	0	2425	0.00
6	1~	230	50	600	56	0.46	48	55	56	59	3660	16	2155	0.06
7	1~	230	50	600	66	0.54	47	54	56	58	3150	30	1855	0.12
8	1~	230	50	600	72	0.59	47	55	57	59	2400	44	1415	0.18
9	1~	230	50	500	27	0.22	46	53	54	57	3435	0	2020	0.00
10	1~	230	50	500	33	0.27	43	50	52	54	3050	11	1795	0.04
11	1~	230	50	500	38	0.31	42	50	52	54	2625	21	1545	0.08
12	1~	230	50	500	42	0.34	42	50	53	54	2000	30	1175	0.12
13	1~	230	50	400	14	0.11	41	48	49	51	2750	0	1620	0.00
14	1~	230	50	400	17	0.14	38	45	46	49	2440	7	1435	0.03
15	1~	230	50	400	20	0.16	37	44	46	48	2100	13	1235	0.05
16	1~	230	50	400	21	0.18	36	44	47	49	1600	19	940	0.08

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase