

8300101484
VMA0350CSNDS

EC axial panel fan - AxiEco

with guard grille for short nozzle

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101484	
Motor	E07432-18	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1180
Power consumption	W	85
Current draw	A	0.7
Max. back pressure	Pa	95
Max. back pressure	in. wg	0.38
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

8300101484
VMA0350CSNDS

EC axial panel fan - AxiEco

with guard grille for short nozzle


Technical description

Size	350 mm
Motor size	74
Rotor surface	Galvanized
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; UKCA; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.

EC axial panel fan - AxiEco

with guard grille for short nozzle

Product drawing

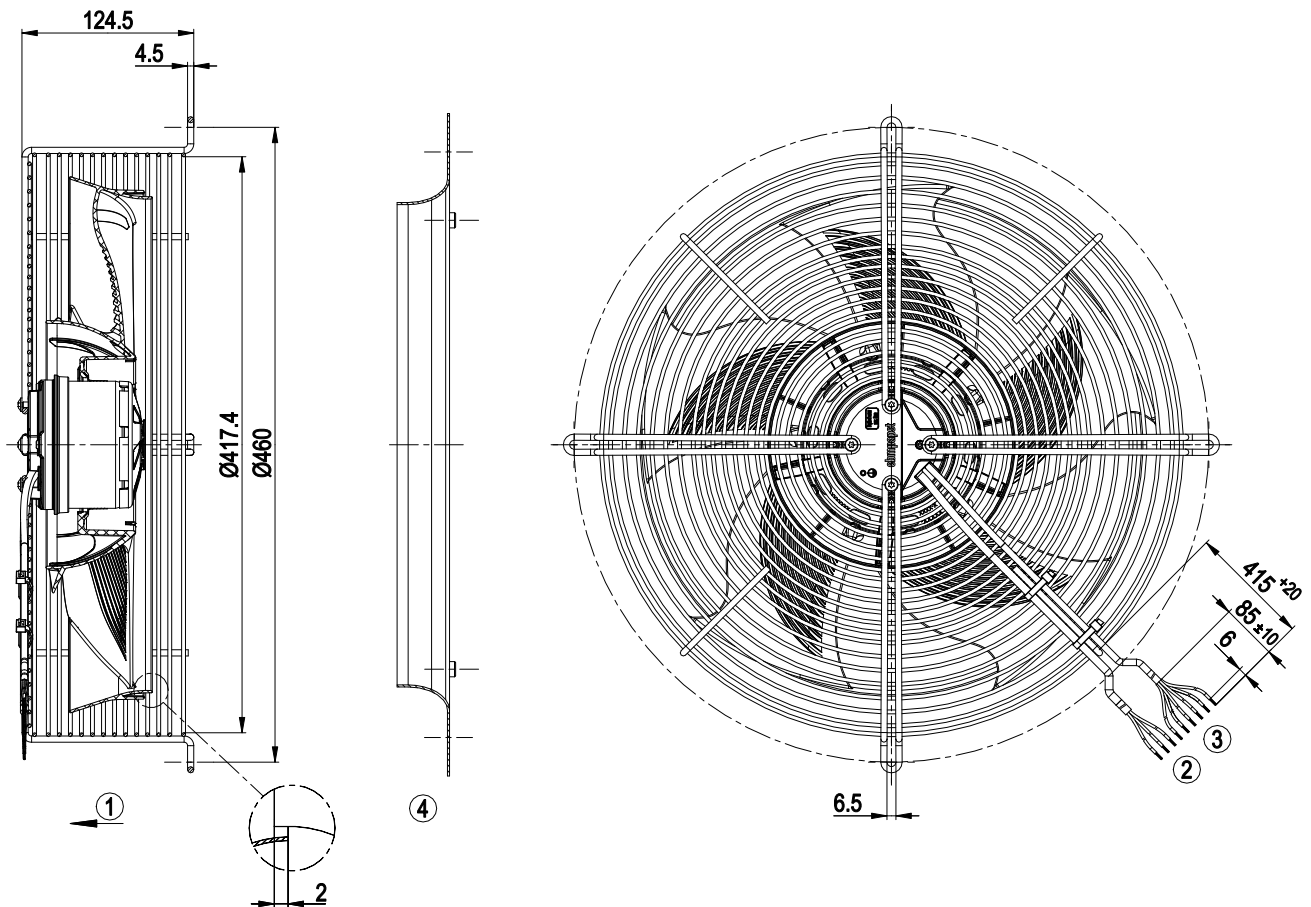


1	Airflow direction "V"
2	Supply line (PWR) PVC AWG20 3x splice
3	Control wire (CTRL) PVC AWG22 6x splice
4	Accessory part: Inlet ring 35100-2-4013 not included in scope of delivery

8300101484
VMA0350CSNDS

EC axial panel fan - AxiEco

with guard grille for short nozzle

Accessory part

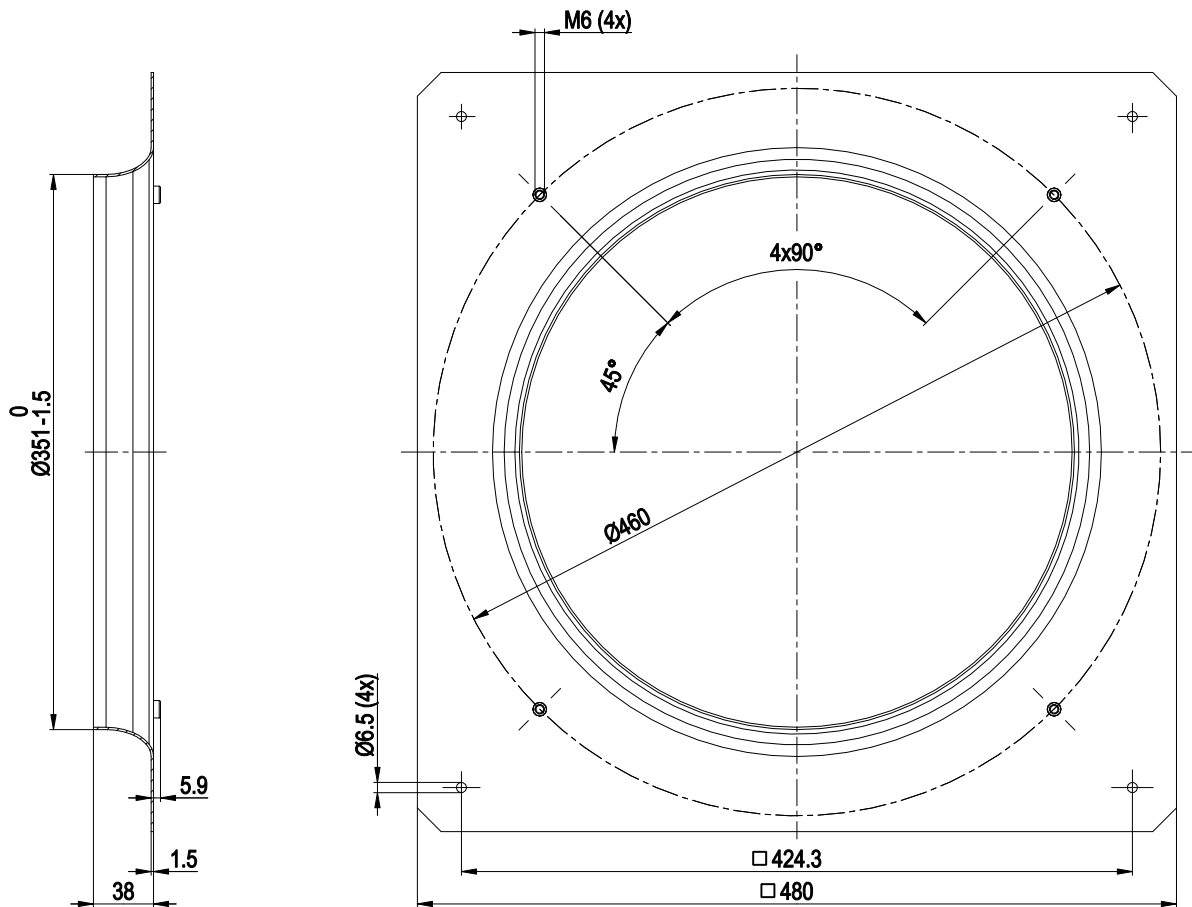


Inlet ring 35100-2-4013

EC axial panel fan - AxiEco

with guard grille for short nozzle

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=1.1 mA Not short-circuit-proof, power supply for external devices, SELV

EC axial panel fan - AxiEco

with guard grille for short nozzle

Terminal/plug assignment

		electrical specification		configurable IO mode		INPUT		OUTPUT			
IO1	Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1k..10 kHz, SELV		Ain1 0-10 V/PWM: analog input		switch: parameter set: #1 / #2	○	configurable function	○	signal: tach out	○
						switch: direction of rotation: cw / ccw	○	switch: enable/disable input	○	signal: diagnostics out	○
							○			signal: alarm out	○
										signal: run monitoring	○
										signal: status	○
IO2	Tach out (open collector) Diagnostics out (open collector) Alarm out (open collector) Open collector	Umax=50 VDC, Imax=10 mA, SELV Umax=50 VDC, Imax=10 mA, SELV Umax=50 VDC, Imax=10 mA, SELV Umax=50 VDC, Imax=10 mA, SELV				source: set value	○	signal: configurable function	○		○
Vout	Voltage output	Voltage 10 VDC, SELV									


Basic (B4)
Factory configuration option upon request

○ Factory configuration option

EC axial panel fan - AxiEco

with guard grille for short nozzle

Curves: Air performance 50 Hz

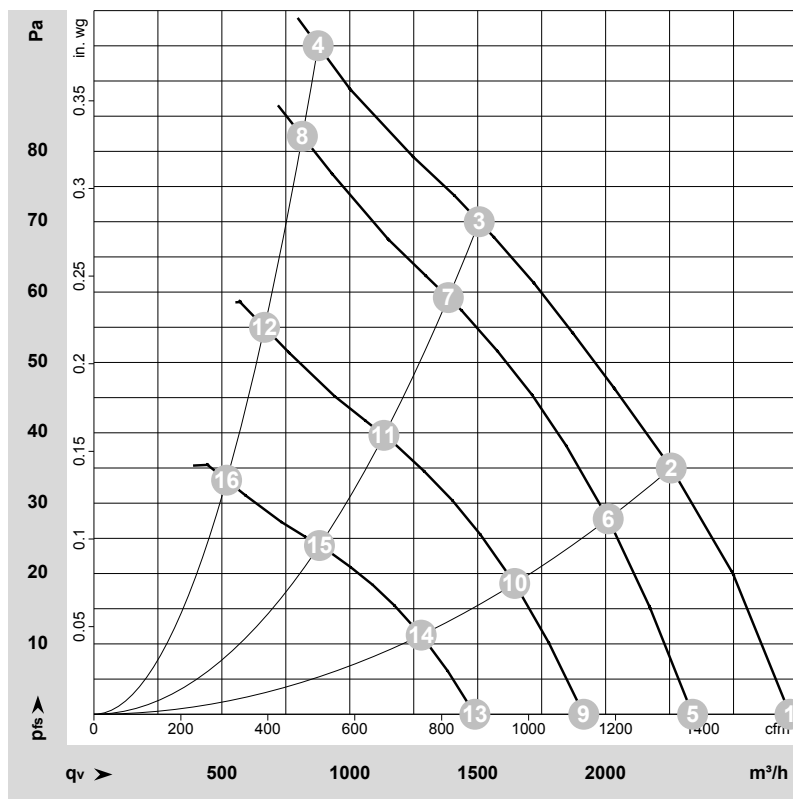

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-229690-1
Date: 2023-11-17
Housing: 35100-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	1280	81	0.67	59	65	2720	0	1600	0.00
2	1~	230	50	1235	86	0.71	56	62	2255	35	1330	0.14
3	1~	230	50	1195	86	0.71	54	62	1505	70	885	0.28
4	1~	230	50	1185	86	0.71	57	65	875	95	515	0.38
5	1~	230	50	1100	51	0.42	55	61	2340	0	1375	0.00
6	1~	230	50	1100	61	0.50	53	59	2010	28	1185	0.11
7	1~	230	50	1100	67	0.55	52	60	1385	59	815	0.24
8	1~	230	50	1100	69	0.57	56	63	815	82	480	0.33
9	1~	230	50	900	28	0.23	50	56	1915	0	1125	0.00
10	1~	230	50	900	33	0.27	48	54	1645	19	970	0.08
11	1~	230	50	900	37	0.30	47	55	1135	40	665	0.16
12	1~	230	50	900	38	0.31	51	58	665	55	395	0.22
13	1~	230	50	700	13	0.11	43	50	1490	0	875	0.00
14	1~	230	50	700	16	0.13	41	48	1280	11	755	0.04
15	1~	230	50	700	17	0.14	41	48	880	24	520	0.10
16	1~	230	50	700	18	0.15	44	52	520	33	305	0.13

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase