

8300101672
VBS0250RSNFS

EC centrifugal fan - RadiCal

backward-curved, single-intake

www.fansco.com
sales@fansco.com

Nominal data

Item	8300101672	
Motor	E07434-29	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	3800
Power consumption	W	500
Current draw	A	2.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	59.5	48.3	09 Power consumption P_{ed}	kW	0.5
02 Measurement category		A		09 Air flow q_v	m³/h	1290
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	755
04 Efficiency grade N		73.2	62	10 Speed (rpm) n	min ⁻¹	3735
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-233267

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300101672
VBS0250RSNFS

EC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description


Size	250 mm
Motor size	74
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Motor bearing	Ball bearing
Technical features	- Locked-rotor detection - Speed control - Alarm relay - Power limiter - Motor current limitation - PFC, active - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Lateral
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; CE; UKCA

8300101672
VBS0250RSNFS

EC centrifugal fan - RadiCal

backward-curved, single-intake

Product drawing

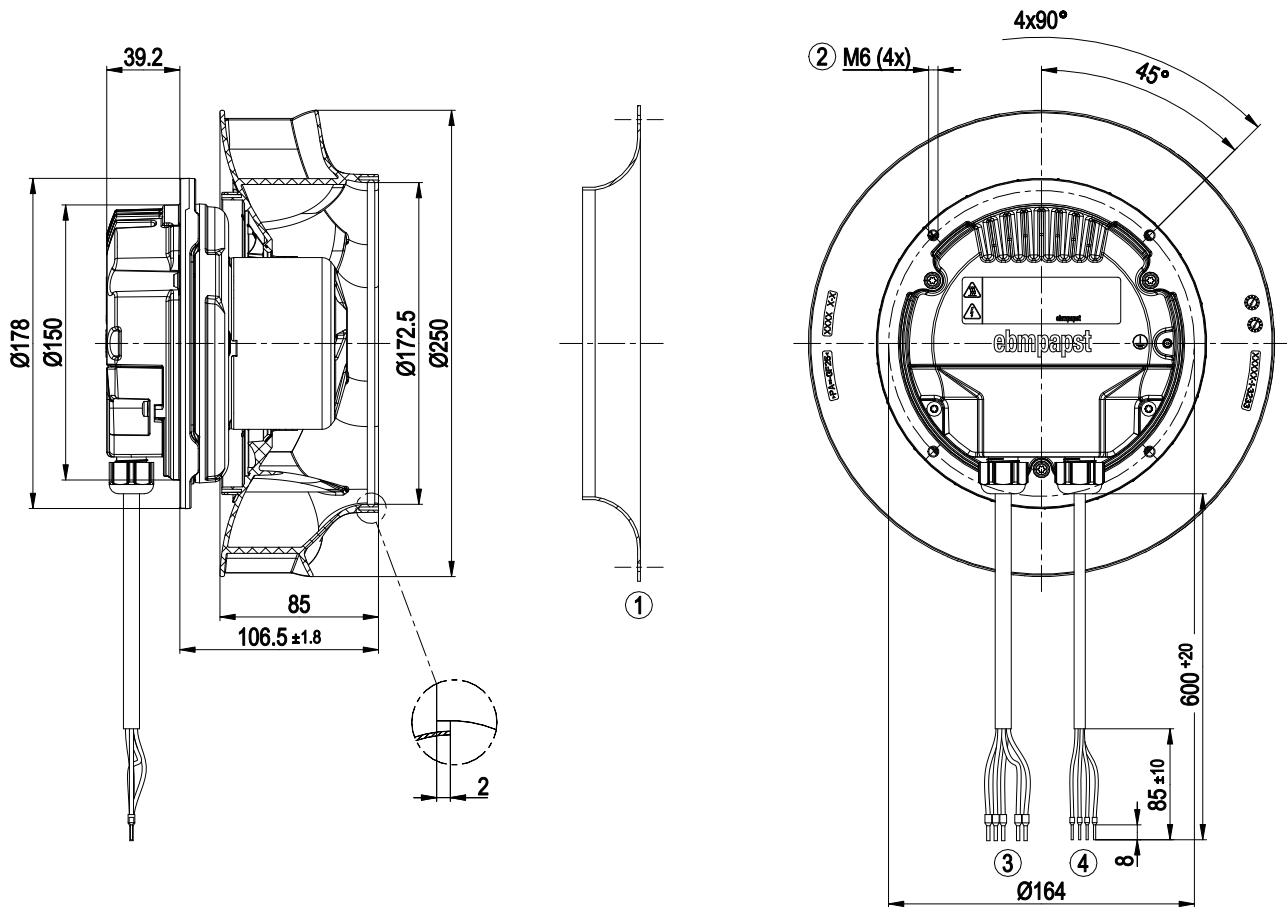



1	Accessory part: inlet ring 96359-2-4013 not included in scope of delivery
2	Max. clearance for screw 16 mm
3	Cable PVC AWG18 (PWR) 5x wire-end ferrule
4	Cable PVC AWG22 (CTRL) 4x wire-end ferrule

8300101672
VBS0250RSNFS

EC centrifugal fan - RadiCal


backward-curved, single-intake

Accessory part

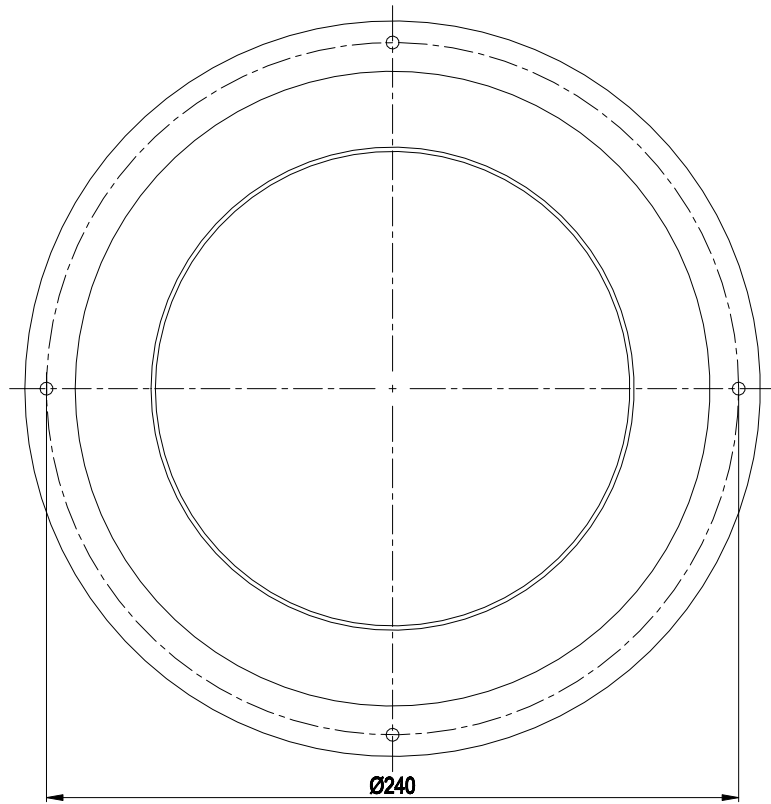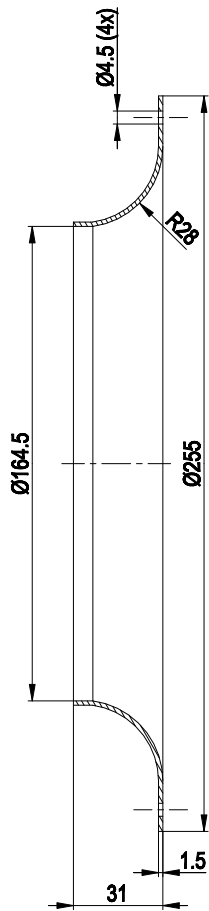

Inlet ring 96359-2-4013

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	PE	green/yellow	Protective earth
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	COM	orange	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	PWR	NC	orange	Status relay, floating status contact, break for failure
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable at the factory (see table Optional interface functions)
	CTRL	IO2	white	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)


Terminal/plug assignment

configurable IO mode			electrical specification			INPUT			OUTPUT		
IO1	Din1 (high active): digital input	active: parametrizable voltage x - 30 VDC not active: pin open or parametrizable voltage < x VDC, SELV Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1 k - 10 kHz, SELV	source: set value	switch: parameter set: #1 / #2	switch: direction of rotation: cw / ccw	switch: enable/disable input	configurable function	signal: tach out	signal: diagnostics out	signal: alarm out	signal: run monitoring
IO2	Ain1 0-10 V/PWM: analog input	Umax = 50 VDC, Imax = 20 mA, SELV Umax = 50 VDC, Imax = 20 mA, SELV Umax = 50 VDC, Imax = 20 mA, SELV Umax = 50 VDC, Imax = 20 mA, SELV	signal: configurable function	signal: tach out	signal: diagnostics out	signal: alarm out	signal: run monitoring	signal: status	signal: configurable function		
COM	Relais	250 VAC / 2 A (AC1)									
NC											
Vout	Voltage output	Voltage 10 VDC, SELV									

Basic (B5)
Factory configuration option upon request

o factory configuration option

Curves: Air performance 50 Hz

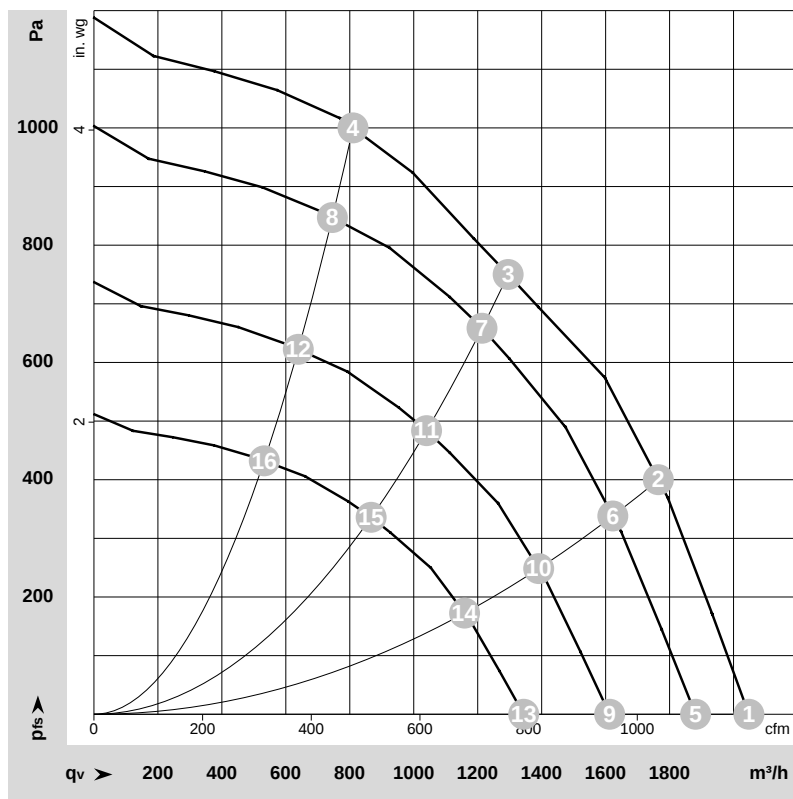

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-233267-1
Date: 2024-08-09
Nozzle: 25011-2-2911

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	3810	381	1.68	78	85	2050	0	1205	0.00
2	1~	230	50	3805	465	2.04	73	81	1765	400	1040	1.61
3	1~	230	50	3735	500	2.20	70	77	1295	750	760	3.01
4	1~	230	50	3805	482	2.12	74	81	810	1000	475	4.01
5	1~	230	50	3500	295	1.30	76	83	1880	0	1105	0.00
6	1~	230	50	3500	361	1.59	71	79	1625	338	955	1.36
7	1~	230	50	3500	412	1.81	68	76	1215	658	715	2.64
8	1~	230	50	3500	376	1.65	72	80	745	847	440	3.40
9	1~	230	50	3000	186	0.82	72	79	1615	0	950	0.00
10	1~	230	50	3000	228	1.00	67	75	1390	248	820	1.00
11	1~	230	50	3000	259	1.14	64	72	1040	484	610	1.94
12	1~	230	50	3000	237	1.04	69	76	640	622	375	2.50
13	1~	230	50	2500	108	0.47	67	75	1345	0	790	0.00
14	1~	230	50	2500	132	0.58	63	70	1160	173	680	0.69
15	1~	230	50	2500	150	0.66	60	67	865	336	510	1.35
16	1~	230	50	2500	137	0.60	64	71	535	432	315	1.73

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase