

G1G120-AB71-02

EC centrifugal fan

forward-curved, single-intake
with housing (flange)



G1G120-AB71-02 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	G1G120-AB71-02	
Motor	M1G055-BD	
Nominal voltage	VDC	48
Nominal voltage range	VDC	36 .. 57
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	2200
Power consumption	W	40
Current draw	A	0.95
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	1.5 kg
Size	120 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	Sheet steel, galvanized
Housing material	Die-cast aluminum
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP22
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Tach output - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Reverse polarity protection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment)
With cable	Axial
Protection class assignment	<p>III; Requires supply with safety extra-low voltage SELV.</p> <p>This component for installation may have several local protection classes. This information relates to this component's basic design.</p> <p>The final protection class is based on the component's intended installation and connection. If there is a PE connection point on the housing, it must not be visible after installation.</p>
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1
Approval	EAC

G1G120-AB71-02

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

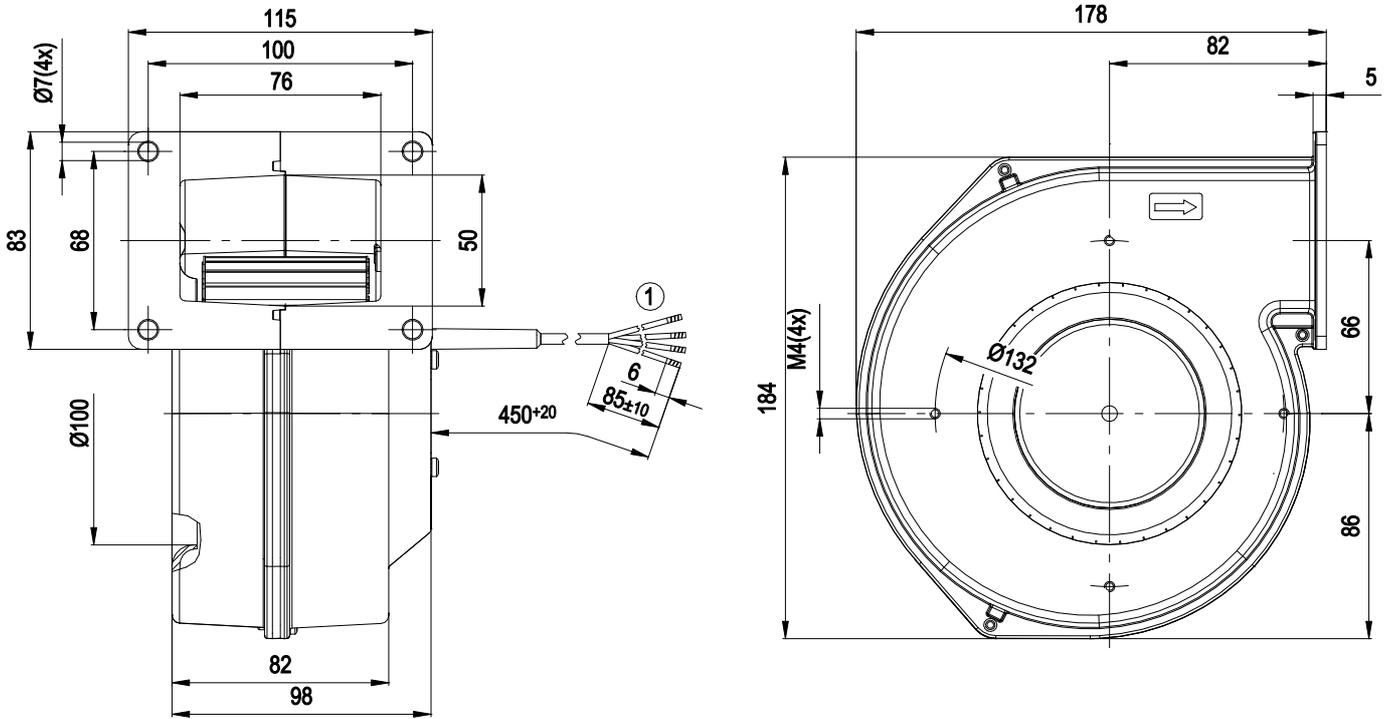


1 Cable AWG20, 4x crimped splices



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Connection diagram

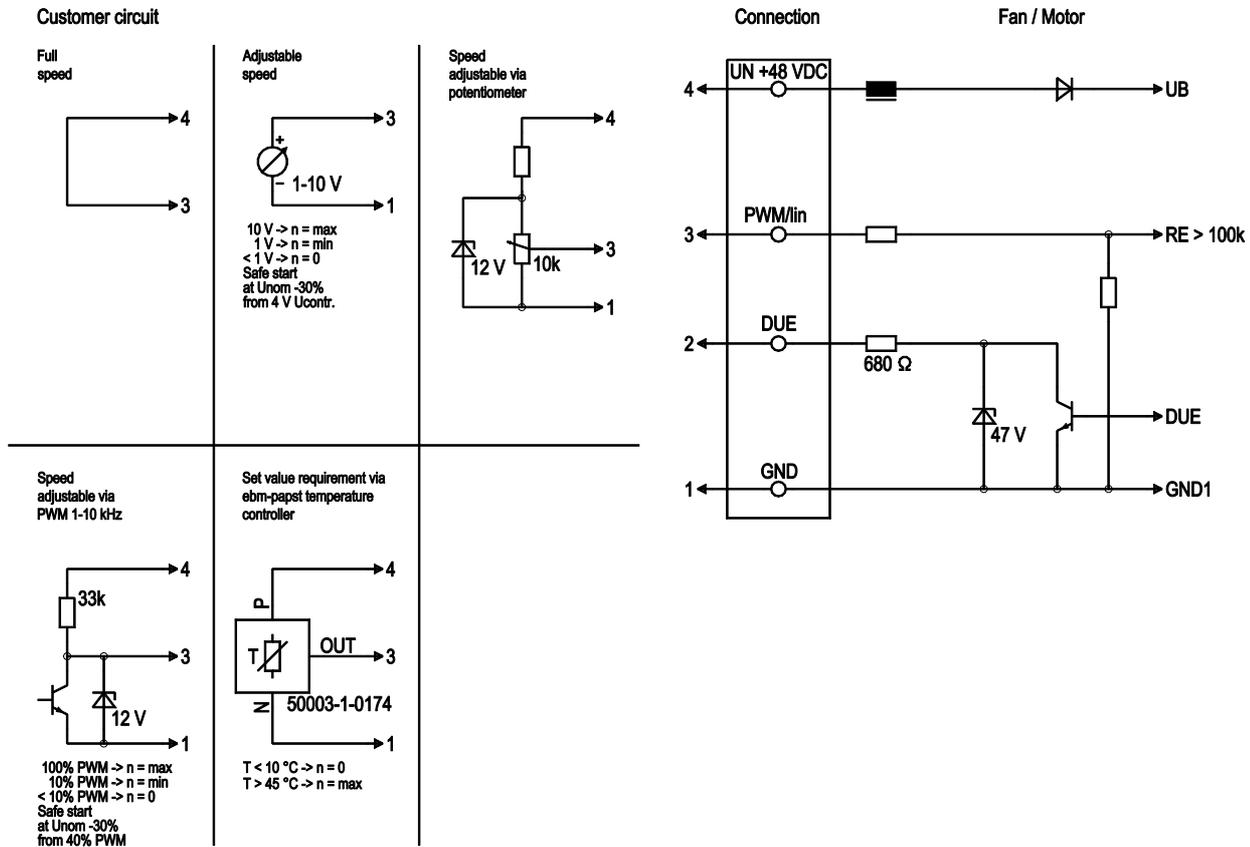

No.	Conn.	Designation	Color	Function/assignment
1	1	GND	blue	Reference ground
1	2	DUE	white	Tach output, 2 pulses per revolution, Isink max = 10 mA
1	3	PWM/LIN	yellow	Control input Re > 100k
1	4	Un +48 VDC	red	Power supply 48 VDC, maximum ripple 3.5%




EC centrifugal fan

forward-curved, single-intake

with housing (flange)

Curves: Air performance

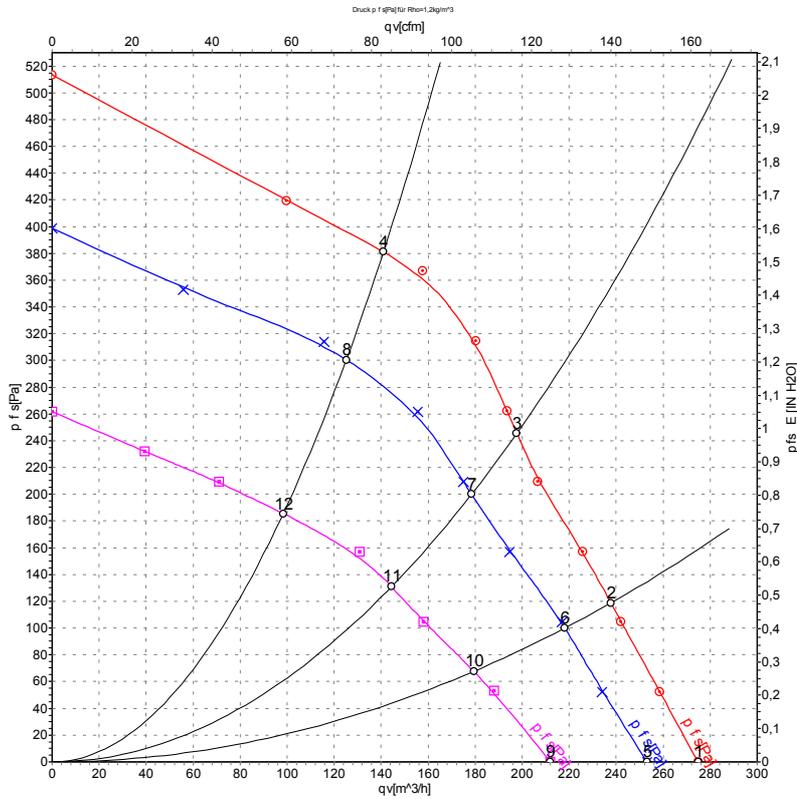

Measurement: LU-50544-1
Measurement: LU-50545-1
Measurement: LU-50542-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	57	2420	51	1.05	275	0	160	0.00
2	57	2615	48	0.95	240	119	140	0.48
3	57	2855	45	0.87	200	246	115	0.99
4	57	3155	38	0.74	140	382	85	1.53
5	48	2200	40	0.95	255	0	150	0.00
6	48	2410	37	0.85	220	100	130	0.40
7	48	2580	33	0.75	180	200	105	0.80
8	48	2815	27	0.62	125	300	75	1.20
9	36	1885	24	0.74	210	0	125	0.00
10	36	1985	21	0.66	180	68	105	0.27
11	36	2100	19	0.58	145	131	85	0.53
12	36	2275	15	0.48	100	186	60	0.75

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

