

EC centrifugal module - RadiCal

backward-curved, single-intake

with housing

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	K3G225-RE07-22	
Motor	M3G055-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2860
Power consumption	W	170
Current draw	A	1.4
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	56.3	43.3
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		75	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.16
09 Air flow q_v	m ³ /h	705
09 Pressure increase p_{fs}	Pa	422
10 Speed (rpm) n	min ⁻¹	2875
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-196416




Technical description

Weight	2.42 kg
Size	225 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PA plastic
Housing material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Auto-addressing can be activated by BUS - Power limiter - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1




Product drawing

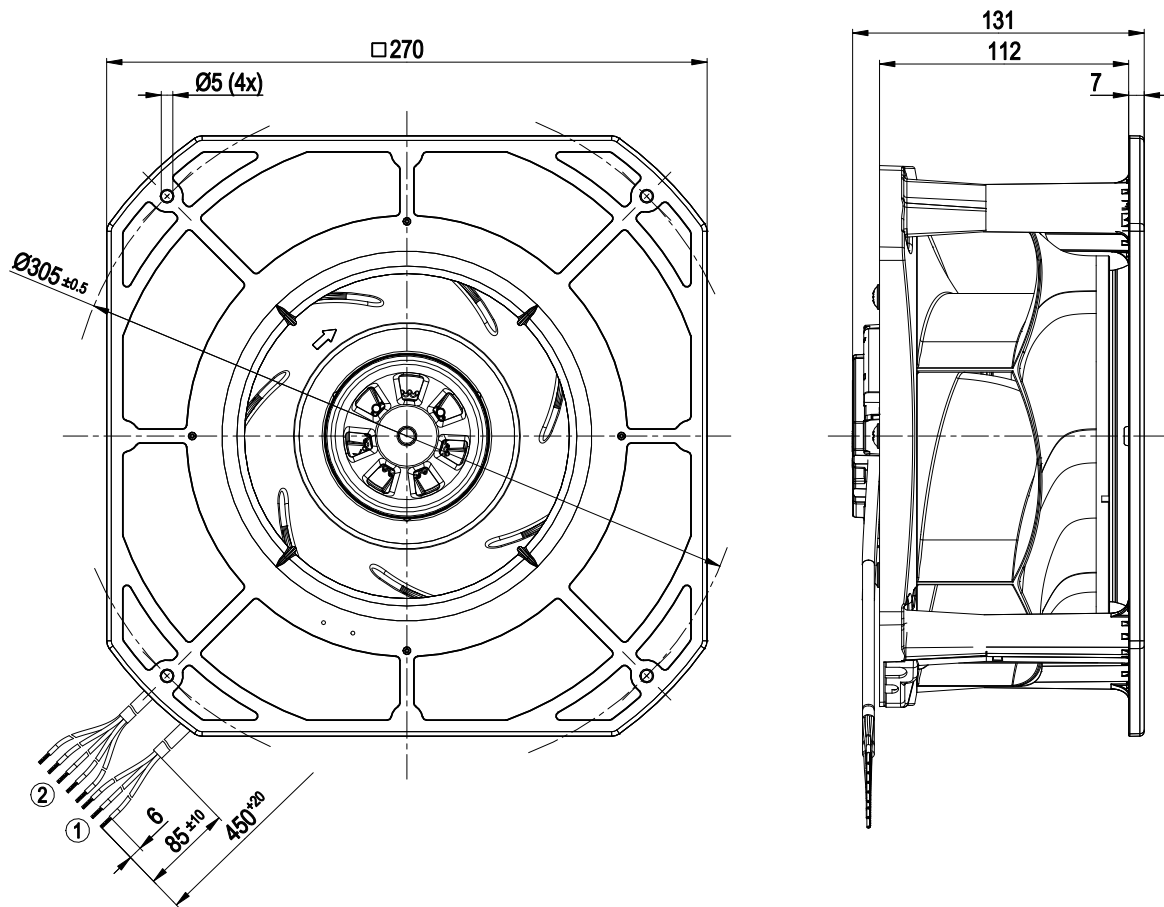

1	Cable PVC AWG20	3x splice	2	Cable PVC AWG22
	5x splice			


Mounting dimensions

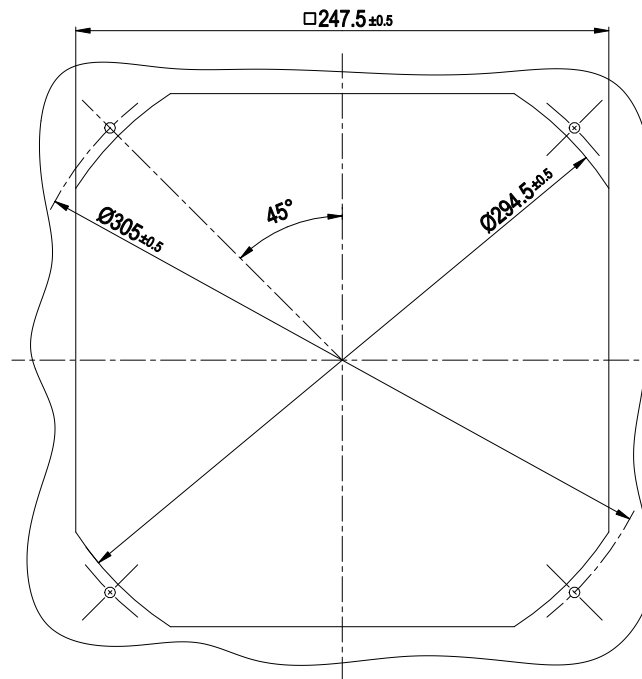

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing


Connection diagram

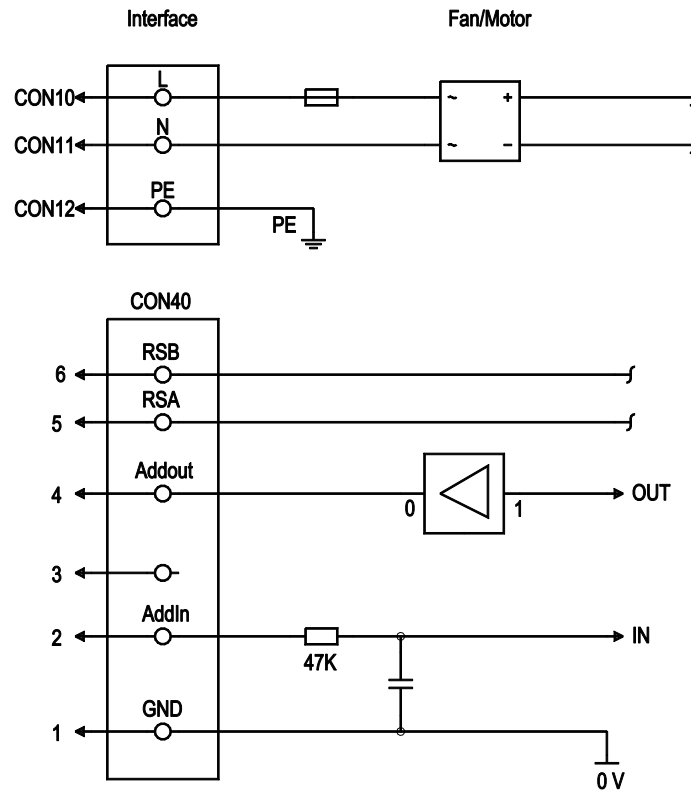

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Power supply, phase, see nameplate for voltage range
	CON11	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Protective earth
CON40	6	RSB	brown	RS-485 interface for MODBUS, RSB; SELV
CON40	5	RSA	white	RS485 interface for MODBUS, RSA; SELV
CON40	4	AddOut /max. 10 mA	gray	Addressing output 10 V, SELV
CON40	3			not used
CON40	2	AddIn	yellow	Addressing input U _{max} = 48 VDC, SELV
CON40	1	GND	blue	Reference ground for interface, SELV



Curves: Air performance 50 Hz

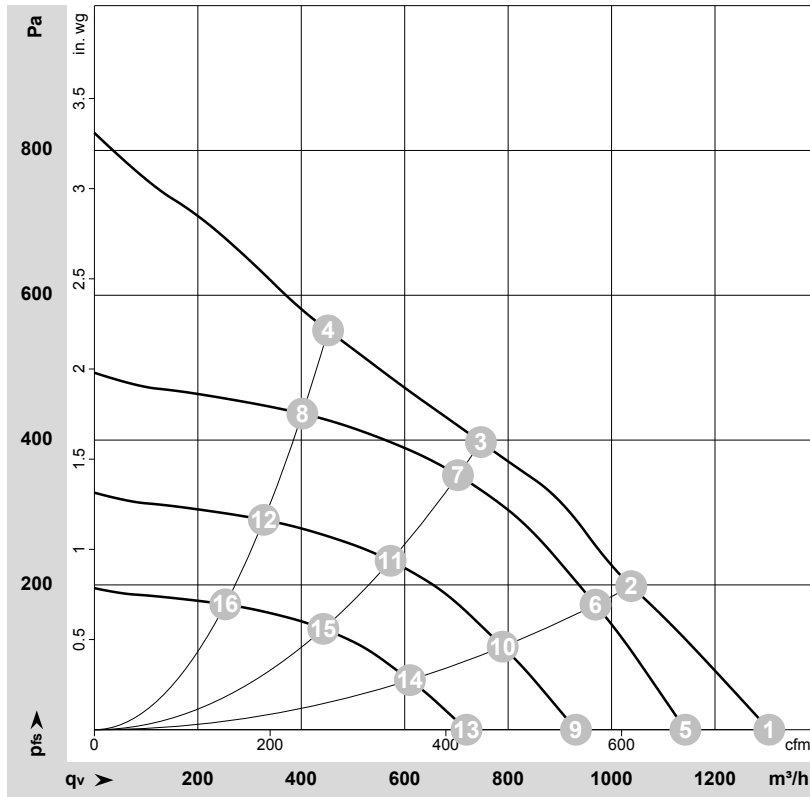

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-196416-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	1~	230	50	3085	170	1.40	1305	0	770	0.00
2	1~	230	50	2895	170	1.40	1040	200	610	0.80
3	1~	230	50	2860	170	1.40	745	400	440	1.61
4	1~	230	50	3035	170	1.40	450	550	265	2.21
5	1~	230	50	2700	112	0.94	1145	0	675	0.00
6	1~	230	50	2700	136	1.15	970	173	570	0.69
7	1~	230	50	2700	139	1.17	705	351	415	1.41
8	1~	230	50	2700	117	0.99	400	437	235	1.75
9	1~	230	50	2200	60	0.51	930	0	550	0.00
10	1~	230	50	2200	73	0.62	790	115	465	0.46
11	1~	230	50	2200	75	0.64	575	233	335	0.94
12	1~	230	50	2200	63	0.54	330	290	195	1.16
13	1~	230	50	1700	28	0.24	720	0	425	0.00
14	1~	230	50	1700	34	0.29	610	68	360	0.27
15	1~	230	50	1700	35	0.29	445	139	260	0.56
16	1~	230	50	1700	29	0.25	255	173	150	0.69

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

