

EC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R3G225-RE07-22	
Motor	M3G055-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2860
Power consumption	W	170
Current draw	A	1.4
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	56.3	43.3	09 Power consumption P_{ed}	kW	0.16
02 Measurement category		A		09 Air flow q_v	m ³ /h	705
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	422
04 Efficiency grade N		75	62	10 Speed (rpm) n	min ⁻¹	2875
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$


LU-196416

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

Technical description


Weight	1.742 kg
Size	225 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Auto-addressing can be activated by BUS - Power limiter - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; CE
Approval	UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1

Product drawing

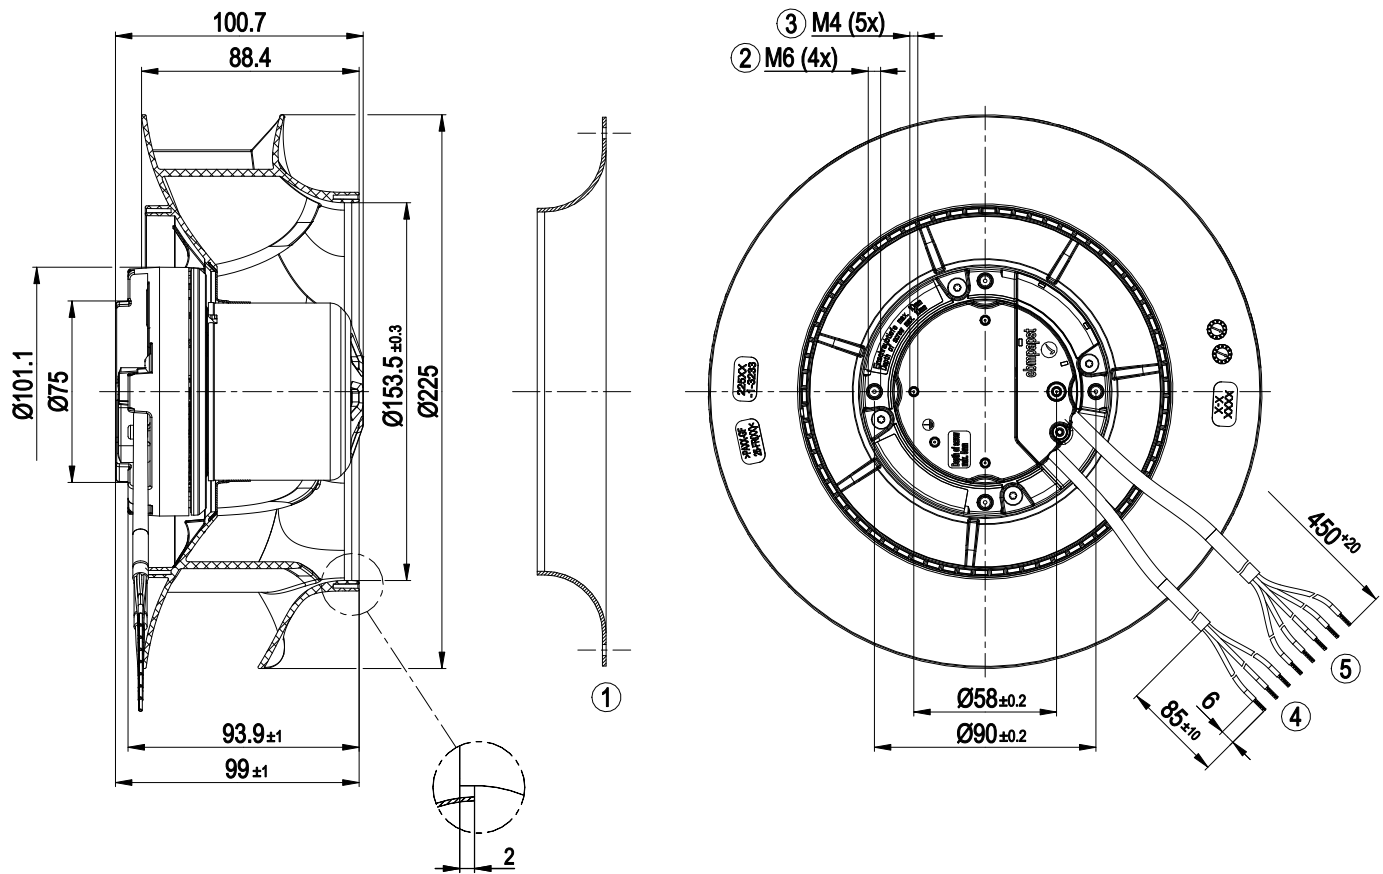


1	Accessory part: inlet ring 96358-2-4013 not included in scope of delivery
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 5 mm
4	Cable PVC AWG20
	3x splice
5	Cable PVC AWG22
	5x splice

Accessory part

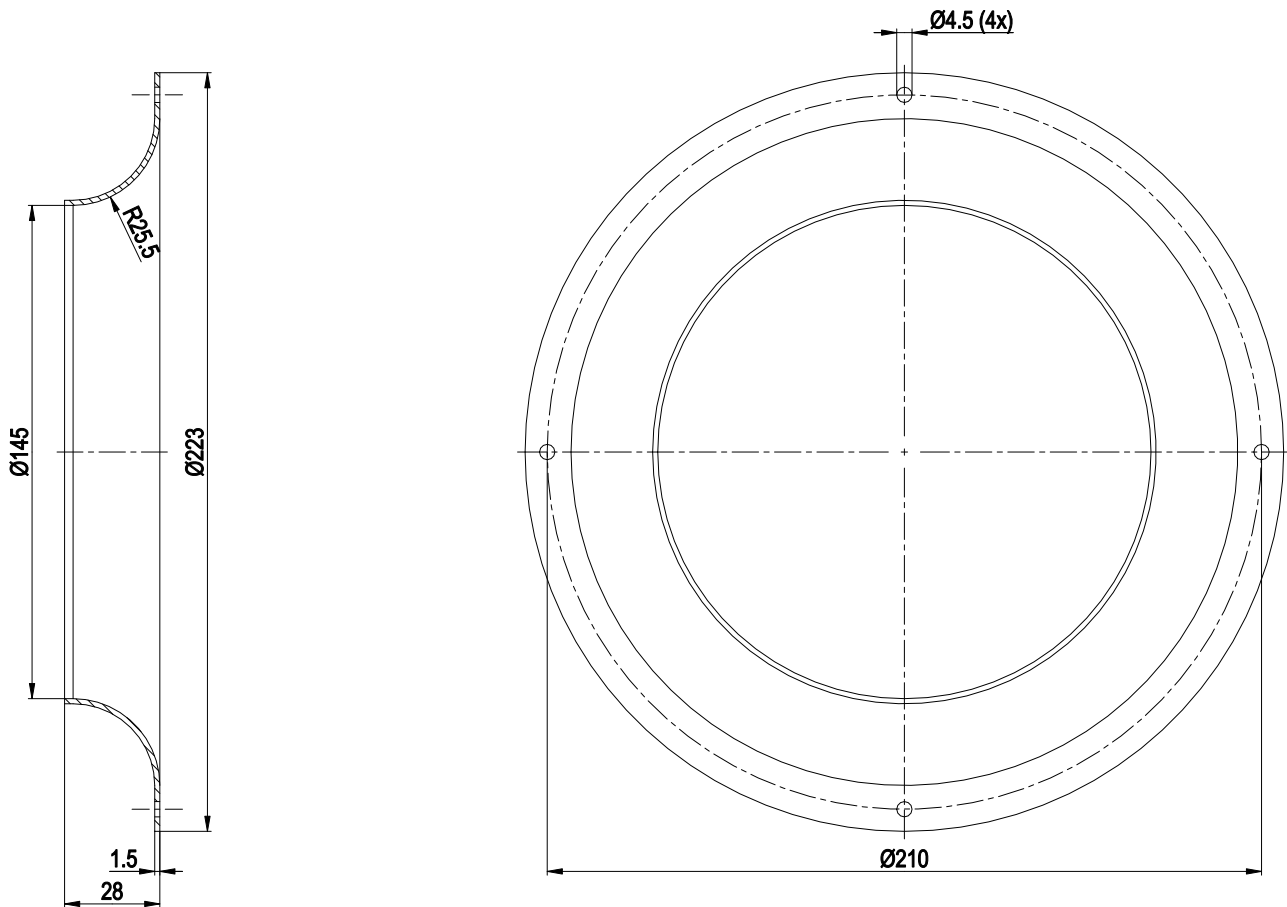

Inlet ring 96358-2-4013

Connection diagram

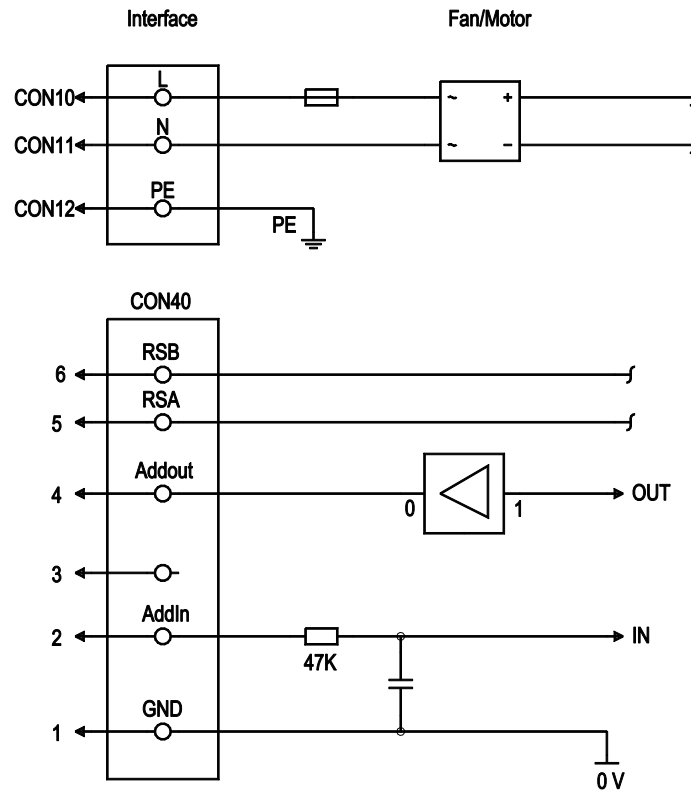


No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Power supply, phase, see nameplate for voltage range
	CON11	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Protective earth
CON40	6	RSB	brown	RS-485 interface for MODBUS, RSB; SELV
CON40	5	RSA	white	RS485 interface for MODBUS, RSA; SELV
CON40	4	AddOut /max. 10 mA	gray	Addressing output 10 V, SELV
CON40	3			not used
CON40	2	AddIn	yellow	Addressing input U _{max} = 48 VDC, SELV
CON40	1	GND	blue	Reference ground for interface, SELV

EC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 50 Hz

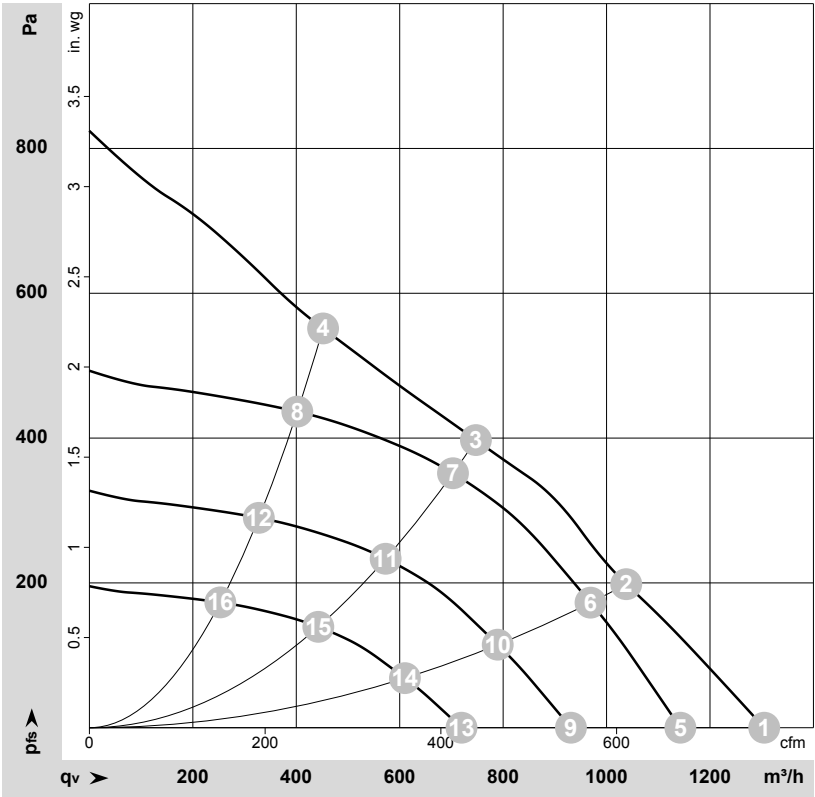

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-196416-1
Date: 2018-12-10
Nozzle: 22510-2-2911

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	3085	170	1.40	1305	0	770	0.00
2	1~	230	50	2895	170	1.40	1040	200	610	0.80
3	1~	230	50	2860	170	1.40	745	400	440	1.61
4	1~	230	50	3035	170	1.40	450	550	265	2.21
5	1~	230	50	2700	112	0.94	1145	0	675	0.00
6	1~	230	50	2700	136	1.15	970	173	570	0.69
7	1~	230	50	2700	139	1.17	705	351	415	1.41
8	1~	230	50	2700	117	0.99	400	437	235	1.75
9	1~	230	50	2200	60	0.51	930	0	550	0.00
10	1~	230	50	2200	73	0.62	790	115	465	0.46
11	1~	230	50	2200	75	0.64	575	233	335	0.94
12	1~	230	50	2200	63	0.54	330	290	195	1.16
13	1~	230	50	1700	28	0.24	720	0	425	0.00
14	1~	230	50	1700	34	0.29	610	68	360	0.27
15	1~	230	50	1700	35	0.29	445	139	260	0.56
16	1~	230	50	1700	29	0.25	255	173	150	0.69

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase