

**ebm-papst Mulfingen GmbH & Co. KGaA & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

**Nominal data**

Type	R3G800-PC02-03	
Motor	M3G150-NA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min <sup>-1</sup>	845
Power consumption	W	2800
Current draw	A	4.3
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

**Data according to Commission Regulation (EU) 327/2011 (prEN 17166)**

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	68.5	56.2	09 Power consumption $P_{ed}$	kW	2.8
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	16280
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	403
04 Efficiency grade N		74.3	62	10 Speed (rpm) n	min <sup>-1</sup>	845
05 Variable speed drive		Yes		11 Specific ratio <sup>*</sup>		1.00

Data obtained at optimum efficiency level.

<sup>\*</sup> Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 

LU-198872

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).


The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

## Technical description

<b>Weight</b>	40.2 kg
<b>Size</b>	800 mm
<b>Motor size</b>	150
<b>Rotor surface</b>	Painted black
<b>Electronics housing material</b>	Die-cast aluminum
<b>Impeller material</b>	Sheet aluminum
<b>Number of blades</b>	5
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP55
<b>Insulation class</b>	"F"
<b>Moisture (F) / Environmental (H) protection class</b>	H1
<b>Ambient temperature note</b>	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	Shaft horizontal or rotor on bottom; rotor on top on request
<b>Condensation drainage holes</b>	On rotor side
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Operation and alarm display with LED</li> <li>- External 15-50 VDC input (parameterization)</li> <li>- Alarm relay</li> <li>- Integrated PI controller</li> <li>- Configurable inputs/outputs (I/O)</li> <li>- MODBUS V6.3</li> <li>- Motor current limitation</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Voltage output 3.3-24 VDC, Pmax = 800 mW</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul>
<b>Power Factor Correction (PFC)</b>	Passive (through low-capacitance DC link)
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical hookup</b>	Terminal box
<b>Protection class assignment</b>	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
<b>Conformity with standards</b>	EN 61800-5-1; CE
<b>Approval</b>	EAC; UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1

## Product drawing

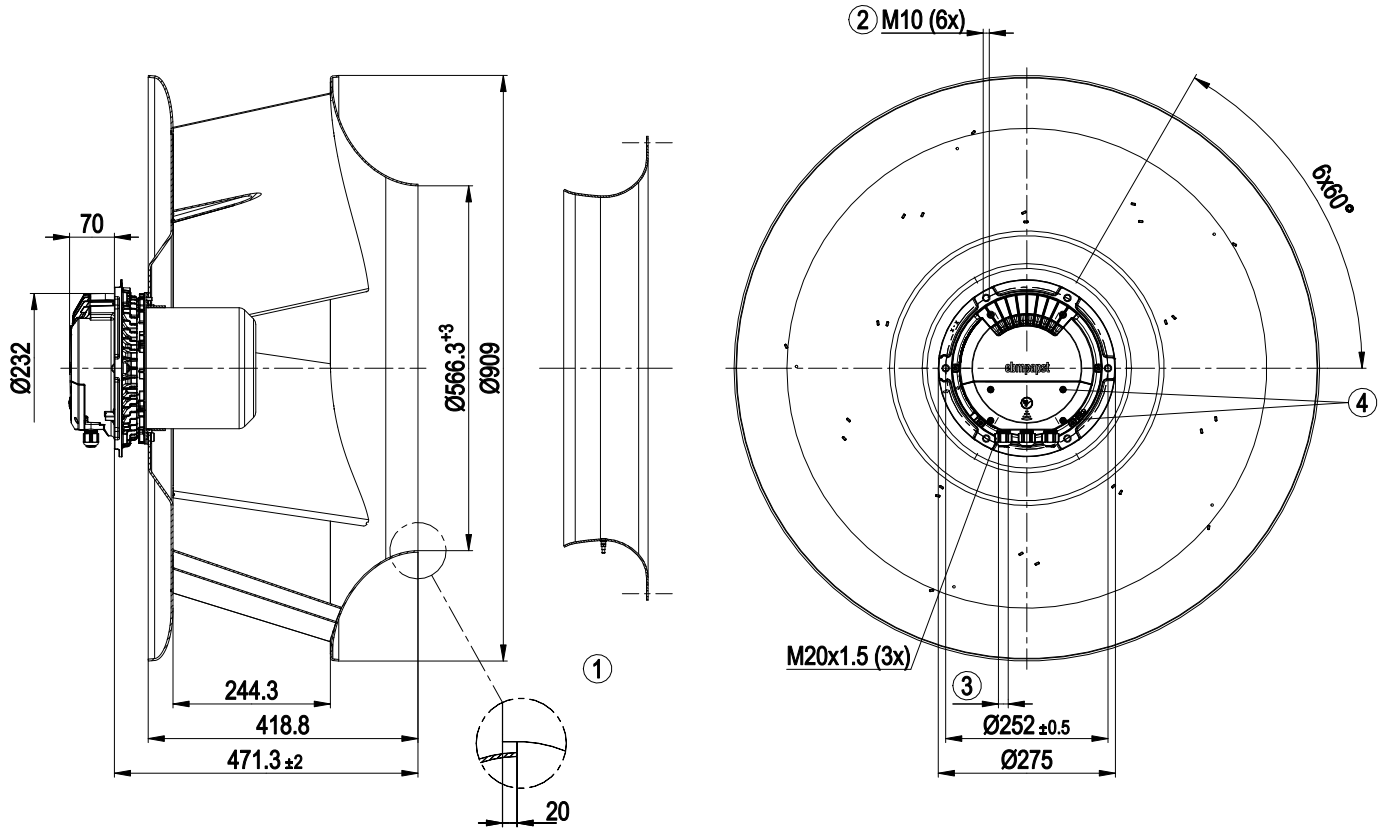

(The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)


4 Tightening torque  $1.5 \pm 0.2$  Nm

1 Accessory part: Inlet ring 80075-2-4013 with pressure tap (k-factor: 695) not included in scope of delivery

2 Max. clearance for screw 20 mm

3 Cable diameter min. 4 mm, max. 10 mm, tightening torque  $4 \pm 0.6$  Nm

## Accessory part

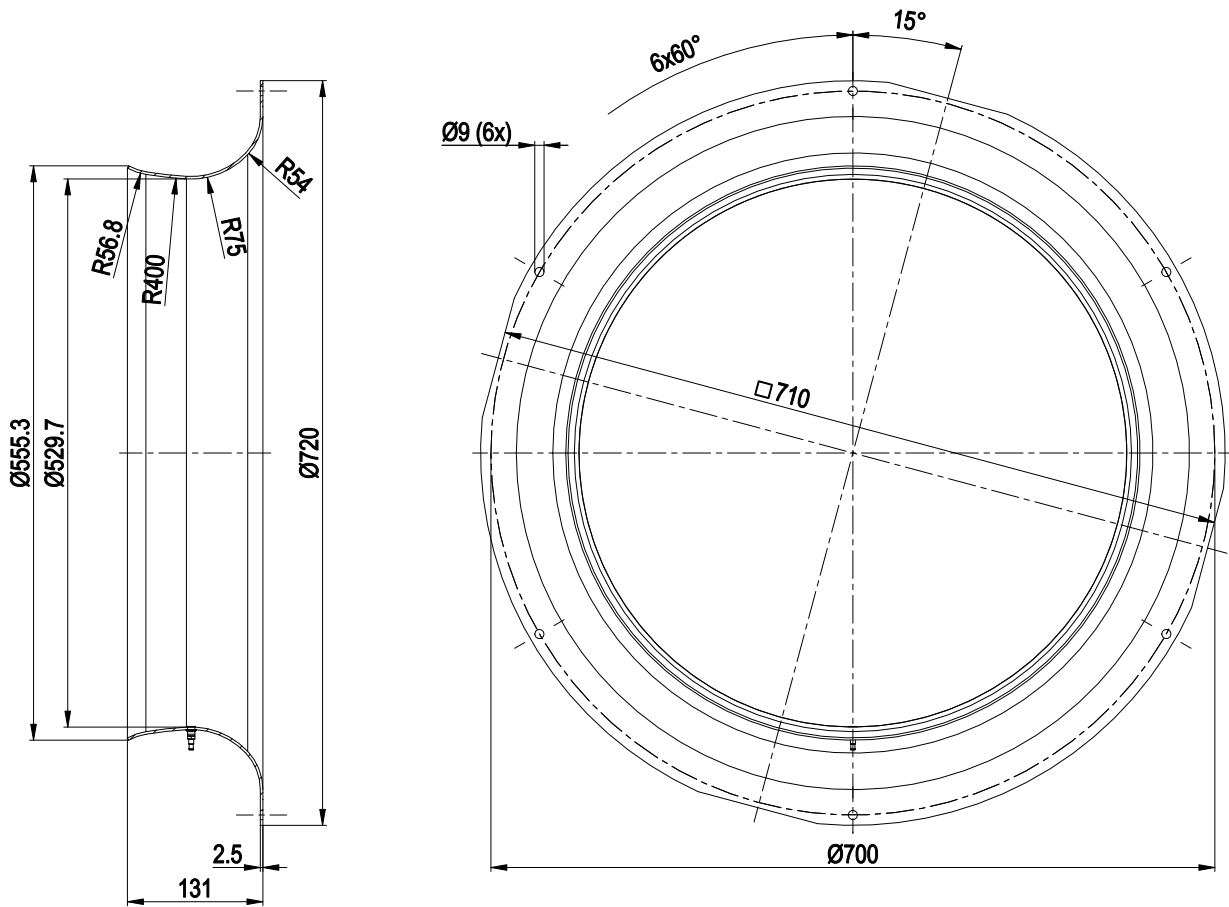


Inlet ring 80075-2-4013 (k-factor: 695)

# EC centrifugal fan - RadiPac

backward-curved, single-intake

## Connection diagram

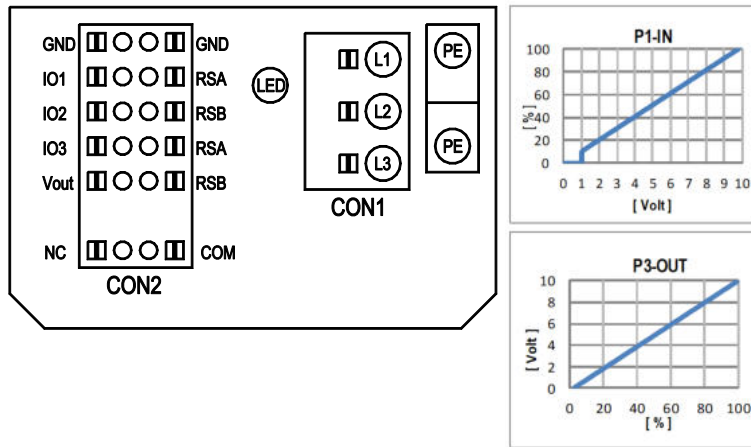

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve


## Terminal/plug assignment

CON2	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	
				source: set value	switch: set value source
IO1	○ Din1 (active high), digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC		○	D158 [0]
	○ Ain1 0-10V/PWM: analog input	RI = 100k, characteristic curve parameterizable, $f_{PWM} = 1k..10kHz$ , SELV		○	D158 [2]
	○ Tach out (open collector output)	Umax = 50VDC, I <sub>max</sub> = 20mA, SELV		○	D158 [5]
	○ Diagnostics out (open collector output)	Umax = 50VDC, I <sub>max</sub> = 20mA, SELV		○	D158 [6]
IO2	○ Din2 (active high), digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC		○	D159 [0]
	○ Ain2 0-10V/PWM: analog input	RI = 100k, characteristic curve parameterizable, $f_{PWM} = 1k..10kHz$ , SELV		○	D159 [2]
	○ Ain2 4-20mA: analog input	RI = 125R, characteristic curve parameterizable, SELV		○	D159 [3]
	○ Din3 (active high), digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC		○	D15A [0]
IO3	○ Din3 (active low), digital input	active: applied voltage < 1.5VDC, SELV not active: pin open or applied voltage 3.5-50VDC		○	D15A [1]
	○ PWMIn3: digital input, idle level high	PWM = 40Hz - 10kHz, characteristics parameterizable		○	D15A [7]
	○ PWMIn3: digital input, idle level low	active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV		○	D15A [8]
	○ Aout3 0-10V: analog output	function parameterizable, max. 5mA max output frequency 300Hz SELV		○	D15A [4]
RSA	○ Tacho out (pulses), analog output	0-10V/max. 5mA max output frequency 300Hz SELV		○	D15A [5]
	○ Diagnostics out (pulses)	0-10V/max. 5mA max output frequency 300Hz, SELV		○	D15A [6]
	○ RS485 bus connection,	MODBUS RTU, specification V6.3, SELV		○	
RSB	○ voltage output	voltage parameterizable 3.3..24VDC +/- 5%, P <sub>max</sub> =800mW, short-circuit-proof, supply for external devices, SELV		○	D16E [..]
	○ alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	15..50VDC		○	
Vout					
D101 [..]		source: set value		○	D101 [..]
D147 [..]		source: sensor value		○	D147 [..]
D104 [..]		switch: parameter set: #1 / #2		○	D104 [..]
D12E [..]		switch: control function: heating (pos.) / cooling (neg.)		○	D12E [..]
D148 [..]		switch: direction of rotation: cw / ccw		○	D148 [..]
D16C [..]		switch: set value source		○	D16C [..]
D16A [..]		switch: fan enable / disable		○	D16A [..]
(selected directly via IO mode)		signal: tach out		○	
(selected directly via IO mode)		signal: diagnostics out		○	
D130 [0]		signal: fan modulation level %		○	D130 [0]
D130 [1]		signal: actual speed		○	D130 [1]
D130 [2]		signal: system modulation level %		○	D130 [2]
D130 [5]		signal: remote control output 0-10V		○	D130 [5]
D00C [1]		pulse input for auto-addressing		○	D00C [1]
D130 [4]		pulse output for auto-addressing		○	D130 [4]

○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3

## Curves: Air performance 50 Hz

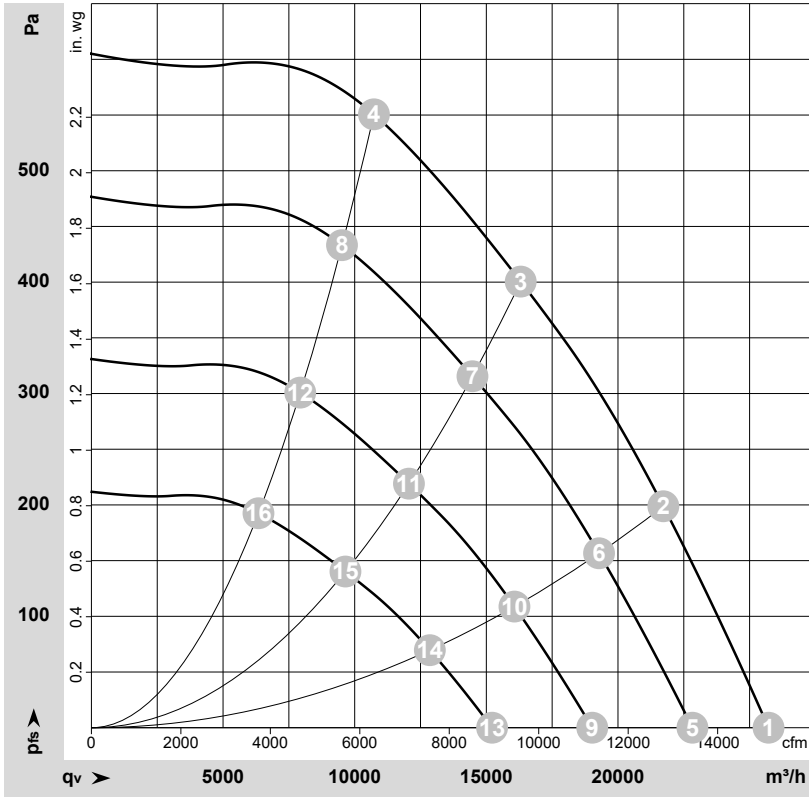

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-198872-1  
Date: 2019-05-22  
Nozzle: 80075-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	3~	400	50	845	1518	2.42	72	80	83	25720	0	15140	0.00
2	3~	400	50	845	2237	3.47	69	77	80	21725	200	12785	0.80
3	3~	400	50	845	2800	4.30	67	74	78	16305	400	9595	1.61
4	3~	400	50	845	2678	4.13	68	76	80	10730	550	6315	2.21
5	3~	400	50	750	1061	1.69	69	77	80	22830	0	13435	0.00
6	3~	400	50	750	1564	2.43	66	74	77	19280	157	11350	0.63
7	3~	400	50	750	1962	3.02	64	71	75	14475	317	8520	1.27
8	3~	400	50	750	1869	2.88	65	73	77	9520	433	5600	1.74
9	3~	400	50	625	614	0.98	64	72	76	19025	0	11195	0.00
10	3~	400	50	625	905	1.40	61	69	73	16070	109	9455	0.44
11	3~	400	50	625	1135	1.75	59	67	71	12060	220	7100	0.88
12	3~	400	50	625	1081	1.67	61	68	73	7930	301	4670	1.21
13	3~	400	50	500	314	0.50	58	67	70	15220	0	8960	0.00
14	3~	400	50	500	463	0.72	56	64	67	12855	70	7565	0.28
15	3~	400	50	500	581	0.90	54	61	65	9650	141	5680	0.57
16	3~	400	50	500	554	0.85	55	63	67	6345	193	3735	0.77

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase