

EC axial fan - ESM

sickle-shaped blades (S series), single-intake
with guard grille for short nozzle

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	S1G300-HP01-11				
Motor	M1G055-DF				
Phase		1~	1~	1~	1~
Nominal voltage	VAC	230	230	230	230
Nominal voltage range	VAC	200 .. 240	200 .. 240	200 .. 240	200 .. 240
Frequency	Hz	50/60	50/60	50/60	50/60
Method of obtaining data		ml			
Speed (rpm)	min ⁻¹	1600	1400	1200	1000
Power consumption	W	85			
Current draw	A	0.7			
Max. back pressure	Pa	50			
Max. back pressure	in. wg	0.2			
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	40	40	40	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change



EC axial fan - ESM

sickle-shaped blades (S series), single-intake
with guard grille for short nozzle

Technical description


Weight	2.8 kg
Size	300 mm
Motor size	55
Rotor surface	Thick-film passivated
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	A
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 70 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing with low-temperature lubricant
Technical features	- Speed setting input (230 V) - Power limiter - Motor current limitation - Soft start - Thermal overload protection for motor
Speed levels	4
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	≤ 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	EAC



EC axial fan - ESM

sickle-shaped blades (S series), single-intake
with guard grille for short nozzle

Product drawing

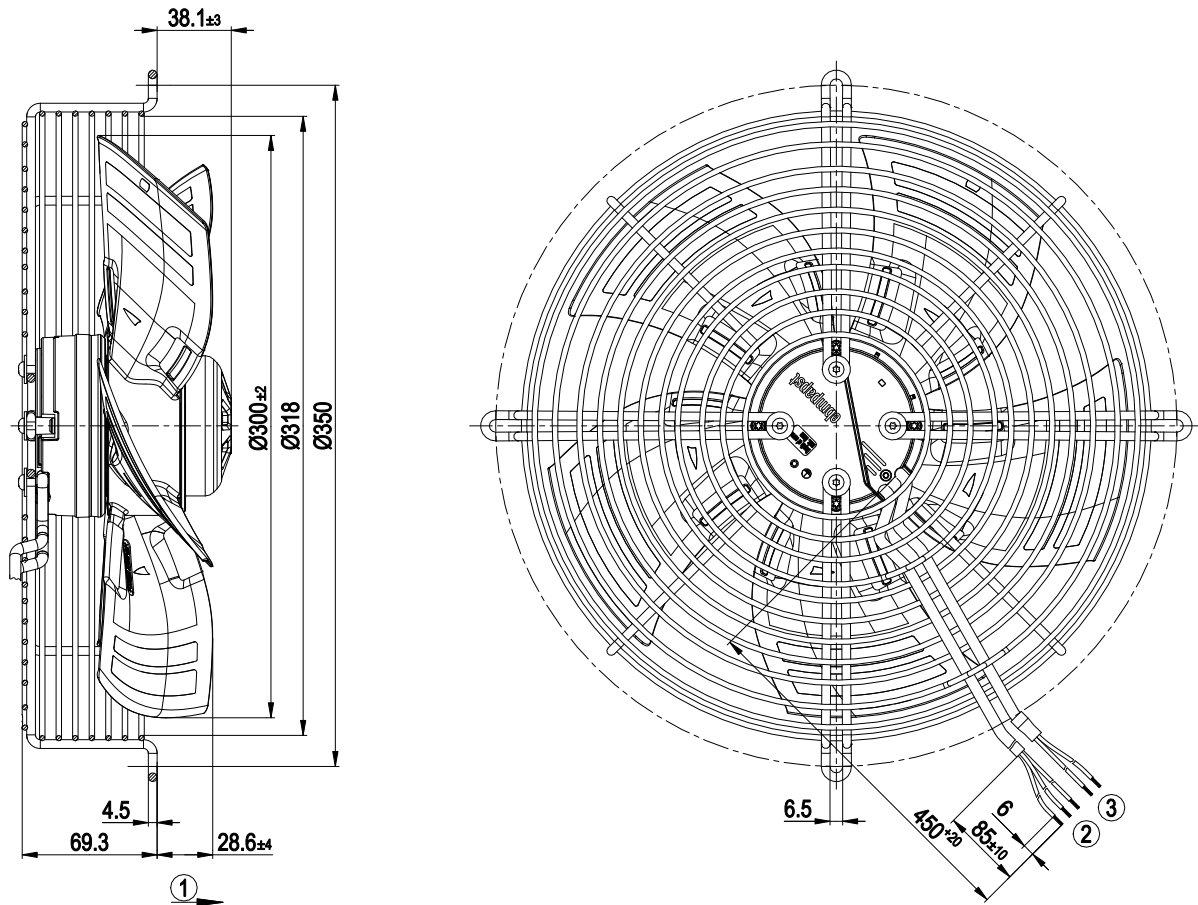


- | | |
|---|---------------------------|
| 1 | Direction of air flow "A" |
| 2 | Cable PVC AWG20 |
| | 3x splice |
| 3 | Cable PVC AWG22 |
| | 2x splice |



EC axial fan - ESM

sickle-shaped blades (S series), single-intake
with guard grille for short nozzle

Connection diagram

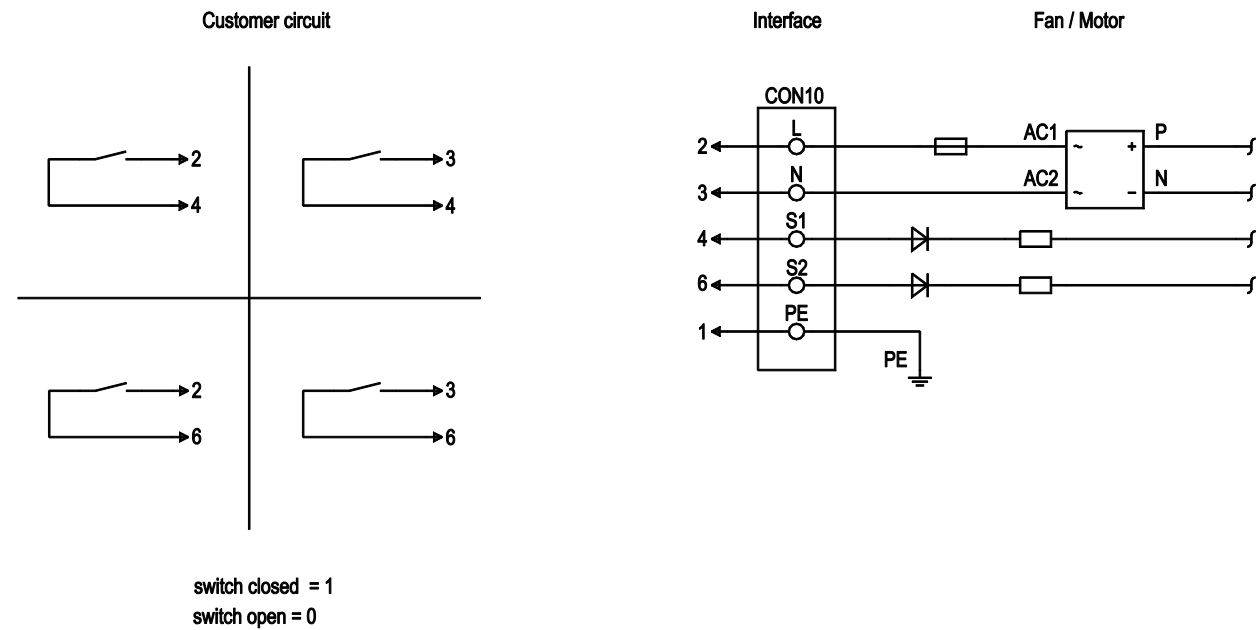

S1	S2	level of rotation speed
0	0	1
1	0	2
0	1	3
1	1	4


No.	Conn.	Designation	Color	Function/assignment
2	L		black	Power supply, phase, see nameplate for voltage range
3	N		blue	Power supply, neutral conductor, see nameplate for voltage range
1	PE		green/yellow	Protective earth
4	S1		yellow	Speed selection: see table
6	S2		white	Speed selection: see table



EC axial fan - ESM

sickle-shaped blades (S series), single-intake
with guard grille for short nozzle

Curves: Air performance 50 Hz

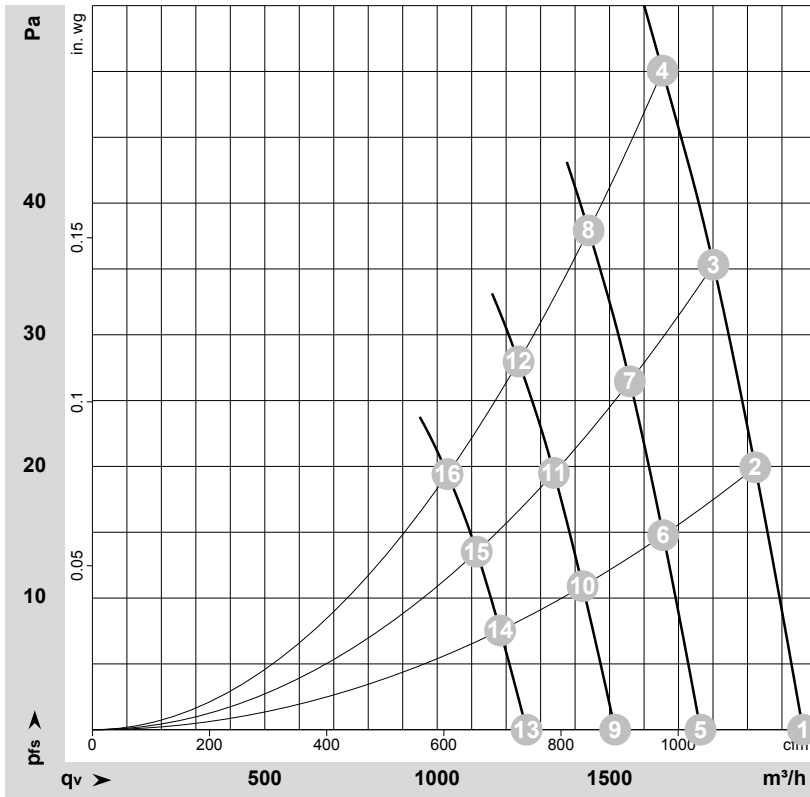

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-190914-1
Measurement: LU-191137-1
Measurement: LU-191140-1
Measurement: LU-191142-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Stage	Wired	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
			V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	1	1~	230	50	1600	69	0.59	2060	0	1215	0.00
2	1	1~	230	50	1600	75	0.64	1925	20	1130	0.08
3	1	1~	230	50	1600	80	0.68	1800	35	1060	0.14
4	1	1~	230	50	1600	85	0.70	1655	50	975	0.20
5	2	1~	230	50	1400	47	0.42	1765	0	1040	0.00
6	2	1~	230	50	1400	51	0.45	1655	15	975	0.06
7	2	1~	230	50	1400	54	0.48	1560	27	920	0.11
8	2	1~	230	50	1400	58	0.51	1440	38	845	0.15
9	3	1~	230	50	1200	30	0.28	1515	0	890	0.00
10	3	1~	230	50	1200	33	0.30	1420	11	835	0.04
11	3	1~	230	50	1200	35	0.31	1340	20	790	0.08
12	3	1~	230	50	1200	37	0.33	1235	28	725	0.11
13	4	1~	230	50	1000	18	0.17	1260	0	740	0.00
14	4	1~	230	50	1000	20	0.18	1185	8	695	0.03
15	4	1~	230	50	1000	21	0.19	1115	14	655	0.06
16	4	1~	230	50	1000	22	0.20	1030	20	605	0.08

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

