

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

**Nominal data**

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | W3G250-HH07-01    |            |
| Motor                    | M3G055-CF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 2330       |
| Power consumption        | W                 | 83         |
| Current draw             | A                 | 0.72       |
| Max. back pressure       | Pa                | 100        |
| Max. back pressure       | in. wg            | 0.4        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment


Subject to change



## Technical description


|                                                                            |                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 2.16 kg                                                                                                                                                                                                                                                                |
| Size                                                                       | 250 mm                                                                                                                                                                                                                                                                 |
| Motor size                                                                 | 55                                                                                                                                                                                                                                                                     |
| Rotor surface                                                              | Thick-film passivated                                                                                                                                                                                                                                                  |
| Blade material                                                             | Press-fitted sheet steel blank, sprayed with PP plastic                                                                                                                                                                                                                |
| Fan housing material                                                       | Die-cast aluminum                                                                                                                                                                                                                                                      |
| Number of blades                                                           | 7                                                                                                                                                                                                                                                                      |
| Airflow direction                                                          | V                                                                                                                                                                                                                                                                      |
| Direction of rotation                                                      | Counterclockwise, viewed toward rotor                                                                                                                                                                                                                                  |
| Degree of protection                                                       | IP54                                                                                                                                                                                                                                                                   |
| Insulation class                                                           | "B"                                                                                                                                                                                                                                                                    |
| Moisture (F) / Environmental (H) protection class                          | H1                                                                                                                                                                                                                                                                     |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                                                                                                                                                                                                                                                |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                                                                                                                                                                                                                                |
| Installation position                                                      | Any                                                                                                                                                                                                                                                                    |
| Condensation drainage holes                                                | None, open rotor                                                                                                                                                                                                                                                       |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                     |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                           |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Speed setting input (230 V)</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage detection</li> </ul> |
| Speed levels                                                               | 2                                                                                                                                                                                                                                                                      |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                     |
| EMC circuit feedback                                                       | According to EN 61000-3-2/3                                                                                                                                                                                                                                            |
| EMC interference emission                                                  | According to EN 61000-6-3 (household environment), on account of the installation conditions, ferritic damping in the cable may be required for the application.                                                                                                       |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                              |
| Electrical hookup                                                          | Terminal strip                                                                                                                                                                                                                                                         |
| Motor protection                                                           | Electronic motor protection                                                                                                                                                                                                                                            |
| With cable                                                                 | Variable                                                                                                                                                                                                                                                               |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                       |
| Conformity with standards                                                  | EN 60335-1; CE                                                                                                                                                                                                                                                         |
| Approval                                                                   | CCC                                                                                                                                                                                                                                                                    |

## Product drawing

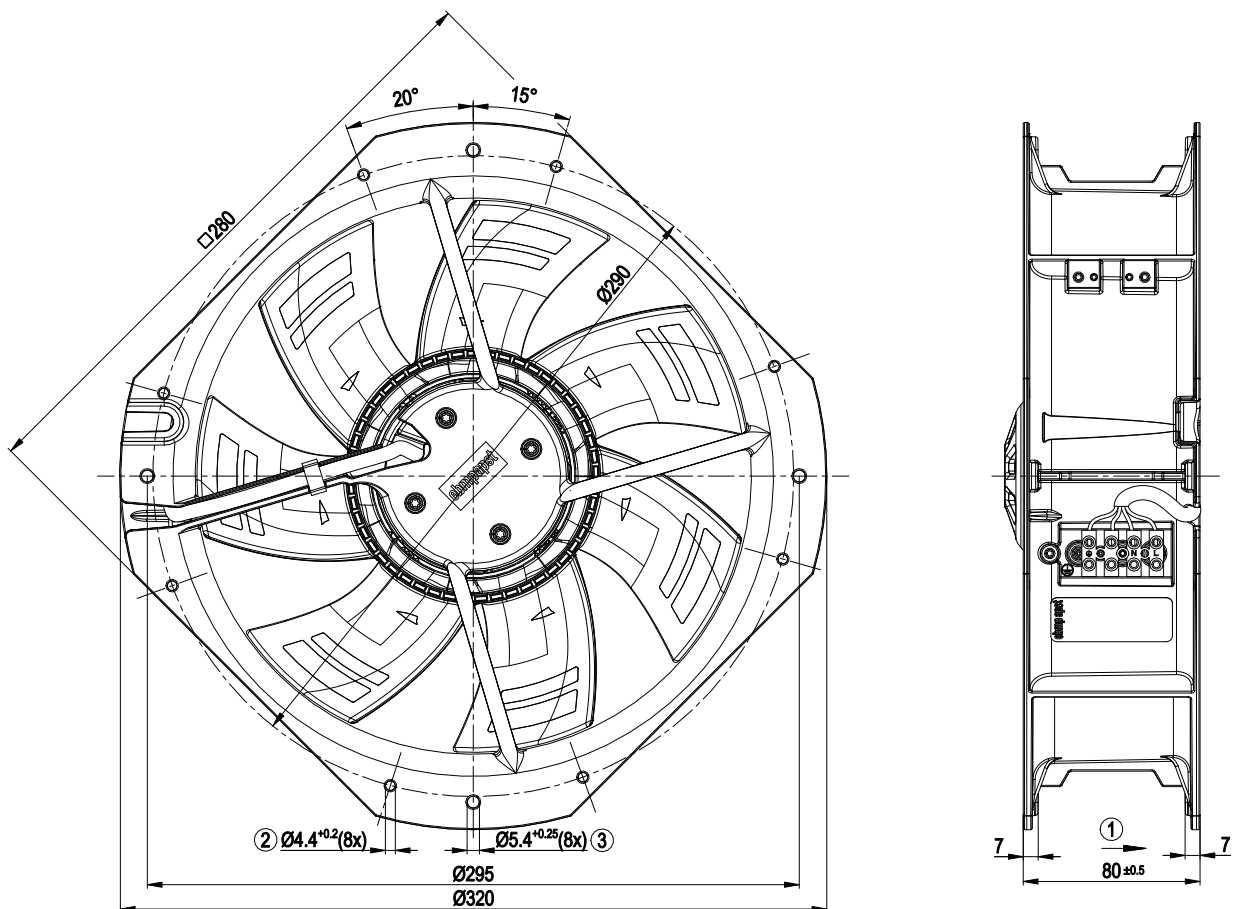


- |   |                            |
|---|----------------------------|
| 1 | Direction of air flow "V"  |
| 2 | For self-tapping M5 screws |
| 3 | For self-tapping M6 screws |

## Connection diagram

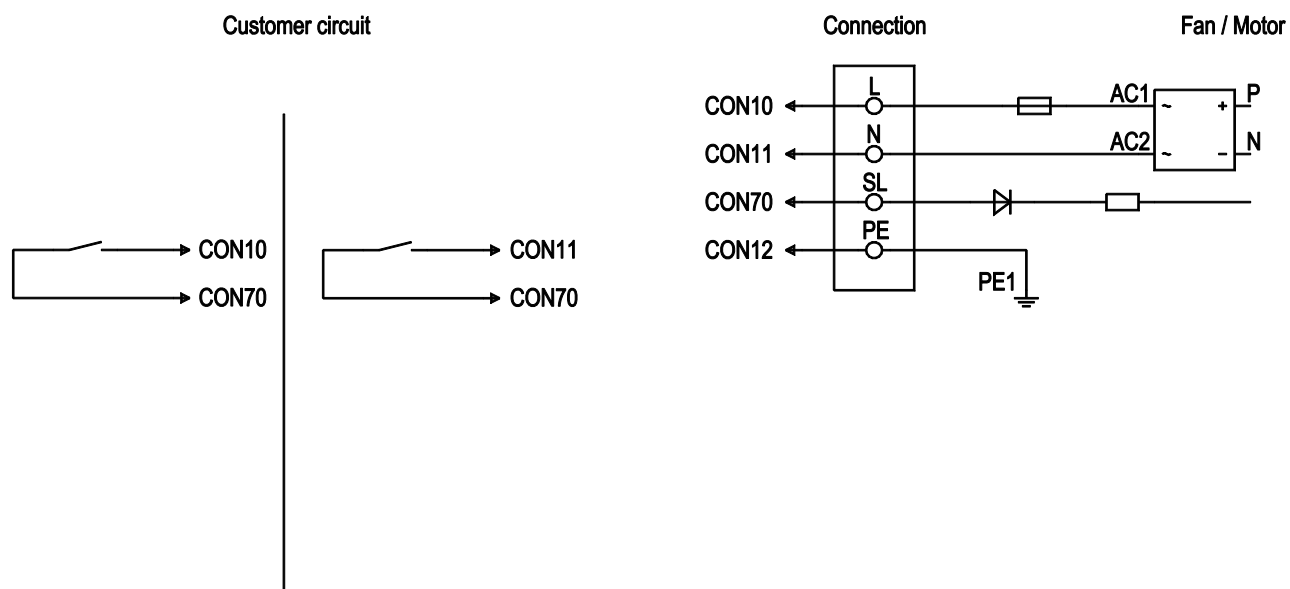

| No. | Conn.  | Designation | Color        | Function/assignment                                             |
|-----|--------|-------------|--------------|-----------------------------------------------------------------|
|     | CON 10 | L           | black        | Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range |
|     | CON 11 | N           | blue         | Neutral conductor                                               |
|     | CON 12 | PE          | green/yellow | Protective earth                                                |
|     | CON 70 | SL          | brown        | Speed selection: switch open speed 1; switch closed speed 2     |

## Curves: Air performance 50 Hz

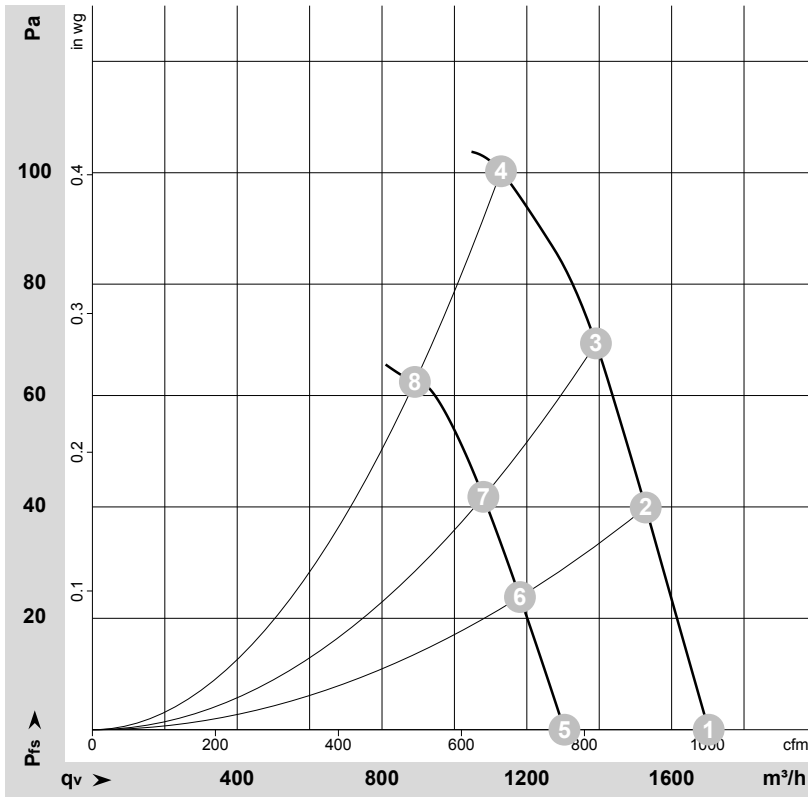

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-140462-1  
Measurement: LU-171110-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|-----------------|------|-------------------|-------------------|----------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h           | Pa              | cfm            | in. wg          |
| 1 | 230 | 50 | 2465              | 67              | 0.59 | 62                | 69                | 1700           | 0               | 1000           | 0.00            |
| 2 | 230 | 50 | 2410              | 75              | 0.65 | 61                | 69                | 1530           | 40              | 900            | 0.16            |
| 3 | 230 | 50 | 2375              | 81              | 0.68 | 61                | 68                | 1390           | 70              | 820            | 0.28            |
| 4 | 230 | 50 | 2330              | 83              | 0.72 | 62                | 69                | 1130           | 100             | 665            | 0.40            |
| 5 | 230 | 50 | 1930              | 32              | 0.32 | 55                | 61                | 1305           | 0               | 770            | 0.00            |
| 6 | 230 | 50 | 1910              | 36              | 0.34 | 54                | 61                | 1180           | 25              | 695            | 0.10            |
| 7 | 230 | 50 | 1890              | 39              | 0.37 | 54                | 61                | 1080           | 42              | 635            | 0.17            |
| 8 | 230 | 50 | 1865              | 41              | 0.41 | 55                | 62                | 890            | 62              | 525            | 0.25            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

