

**Product Data Sheet**    **9295420005**  
**VWEG172XKLSS**  
**6318/2TDHP**

6318/2TDHP (9295420005) ebmpapst Datasheet  
sales@fansco.com www.fansco.com

**ebmpapst**

engineering a better life



6318/2TDHP

INDEX

- 1 General ..... 3**
- 2 Mechanics ..... 3**
  - 2.1 General ..... 3
  - 2.2 Connections ..... 3
- 3 Operating Data ..... 4**
  - 3.1 Electrical Interface - Input ..... 4
  - 3.2 Electrical Operating Data ..... 5
  - 3.3 Electrical Interface - Output ..... 6
  - 3.4 Electrical Features ..... 7
  - 3.5 Aerodynamics ..... 8
  - 3.6 Sound Data ..... 9
- 4 Environment ..... 9**
  - 4.1 General ..... 9
  - 4.2 Climatic Requirements ..... 9
- 5 Safety ..... 10**
  - 5.1 Electrical Safety ..... 10
  - 5.2 Approval Tests ..... 10
- 6 Reliability ..... 10**
  - 6.1 General ..... 10

1 General

Fan type	Axial	
Rotating direction looking at rotor	Counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	


2 Mechanics

2.1 General

Depth	51,0 mm	
Diameter	172,0 mm	
Mass	0,875 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 600 Ncm Remaining corners: 600 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 365 mm	
Tolerance	+ - 10,0 mm	
Tube length	S = 10 mm	
Tolerance	+ - 2,0 mm	

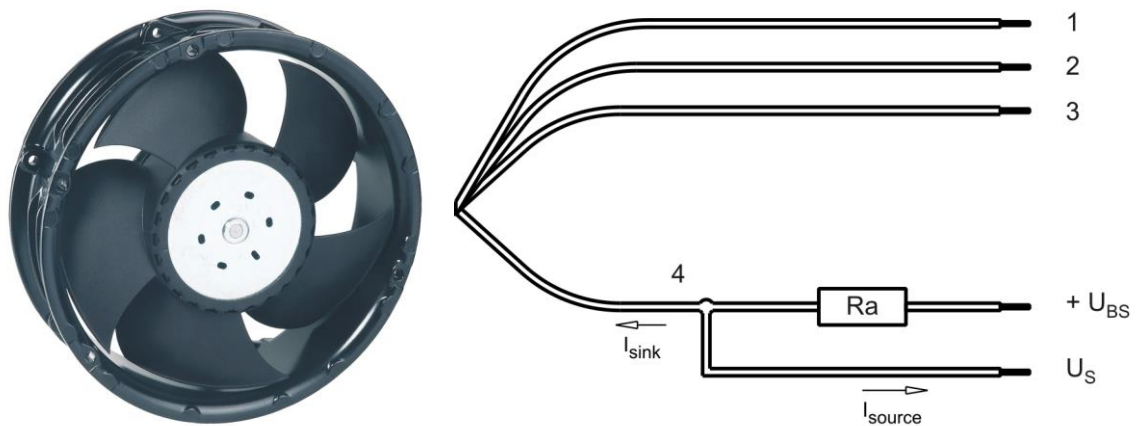

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 22	1,7 mm
2	blue	- GND	AWG 22	1,7 mm
3	violet	PWM	AWG 22	1,7 mm
4	white	Tacho	AWG 22	1,7 mm

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.



### 3 Operating Data

#### 3.1 Electrical Interface - Input

Control input	PWM
---------------	-----

#### Features

Input type	Open collector	
PWM - Frequency		typical: 2 kHz
Input frequency range		1 kHz - 20 kHz

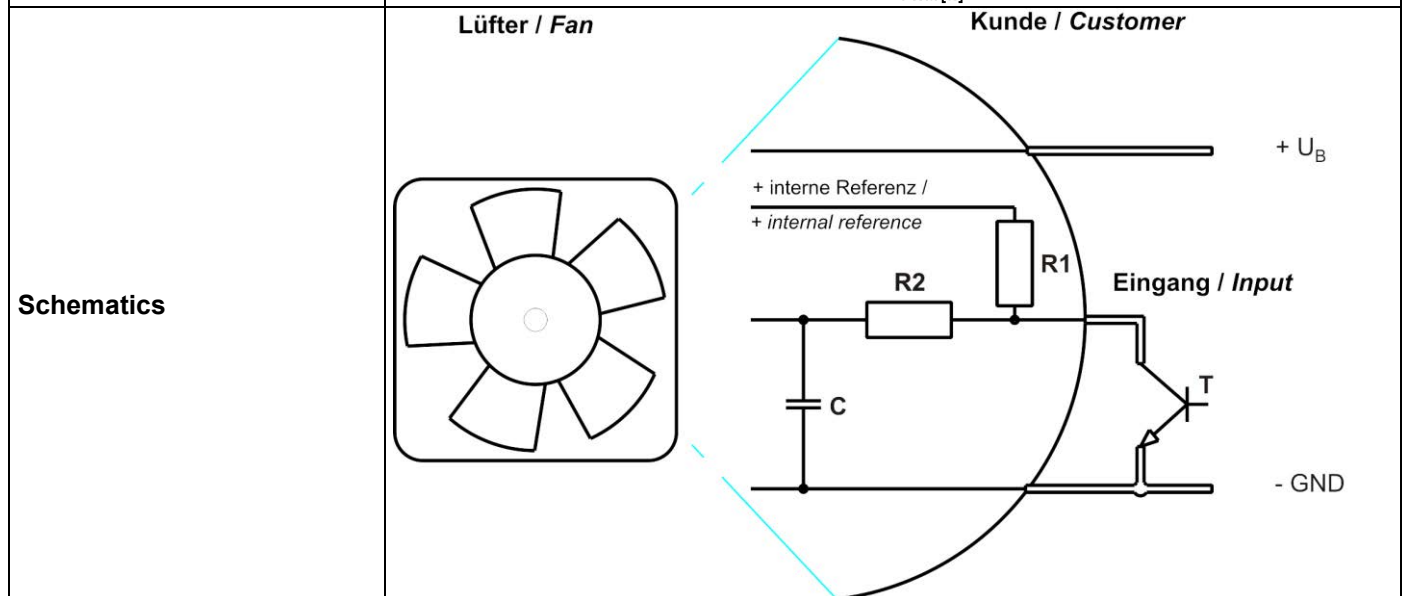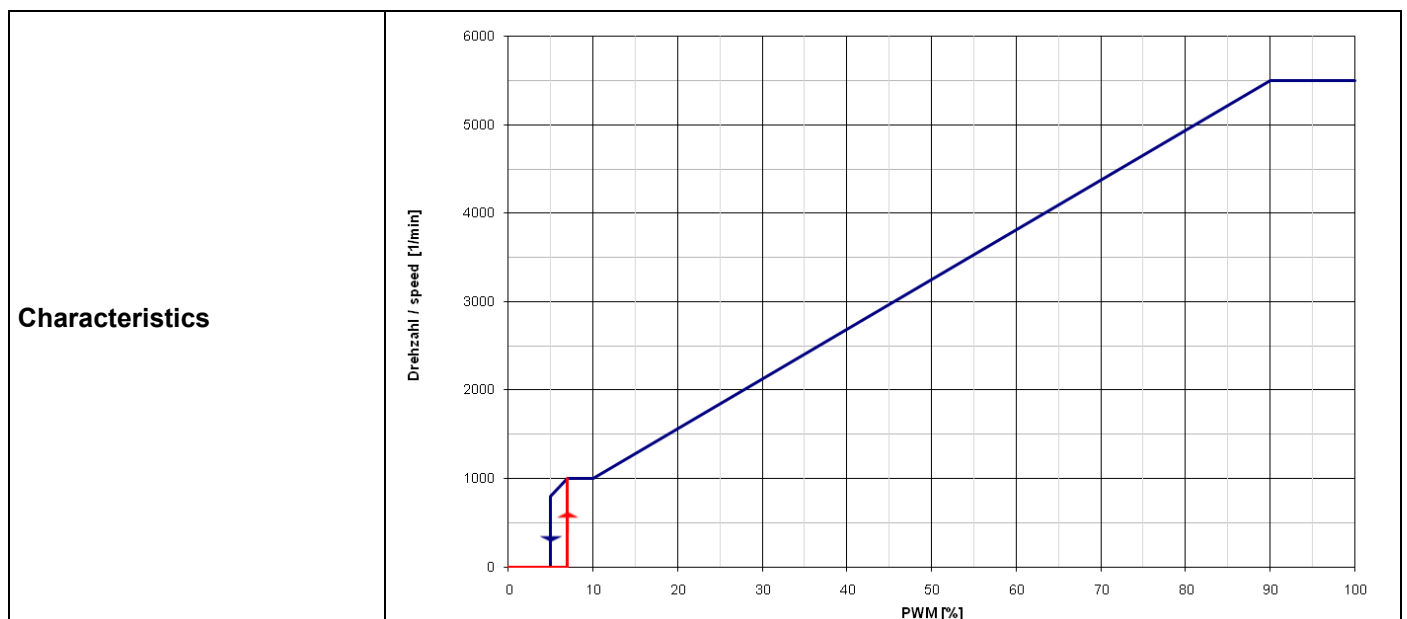

The shown pull-up resistor R1 to the internal reference voltage (+5V) has 4.7kOhm.

#### Transistor requirements:

Vce max. >= 12V; Isink max. >=5mA; Vce sat. <= 0,15V

**Speed control:**

By puls width modulation (PWM) 0...100%, f: 1...20 kHz  
Open collector in relation to signal-ground.

**Information to the curve:**

0 % - 7% PWM: 0 1/min  
 7 % PWM: 1000 1/min (Fan on, coming from 0% PWM)  
 7 % - 10% PWM: 1000 1/min (corresponding to min. speed)  
 10 % - 90% PWM: linear increasing curve  
 90 % - 100% PWM: 5500 1/min (corresponding to max. speed)  
 7 % - 5 % PWM: linear decreasing curve (coming from 100% PWM)  
 5 % PWM: 800 1/min or 0 1/min (Fan off, coming from 100% PWM)

**3.2 Electrical Operating Data**

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

Δp = 0: corresp. to free air flow (see chapter aerodynamics)  
 I: corresp. to arithm. mean current value


Name	Condition
PWM 0001	PWM: 95 %; f: 2 kHz

**100% PWM or broken lead wire (open control input)**

Features	Condition	Symbol	Values		
Voltage range		U	36 V		72 V
Nominal voltage		U <sub>N</sub>		48 V	
Power consumption	Δp = 0	P	28,3 W	41 W	39,5 W
Tolerance	PWM 0010		+/- 10 %	+/- 10 %	+/- 10 %
Current consumption	Δp = 0	I	785 mA	850 mA	550 mA
Tolerance	PWM 0010		+/- 10 %	+/- 10 %	+/- 10 %
Speed	Δp = 0	n	5.000 1/min	5.500 1/min	5.500 1/min
Tolerance	PWM 0010		+/- 7,5 %	+/- 5 %	+/- 5 %


3.3 Electrical Interface - Output

Tacho type	/2 (open collector)
------------	---------------------

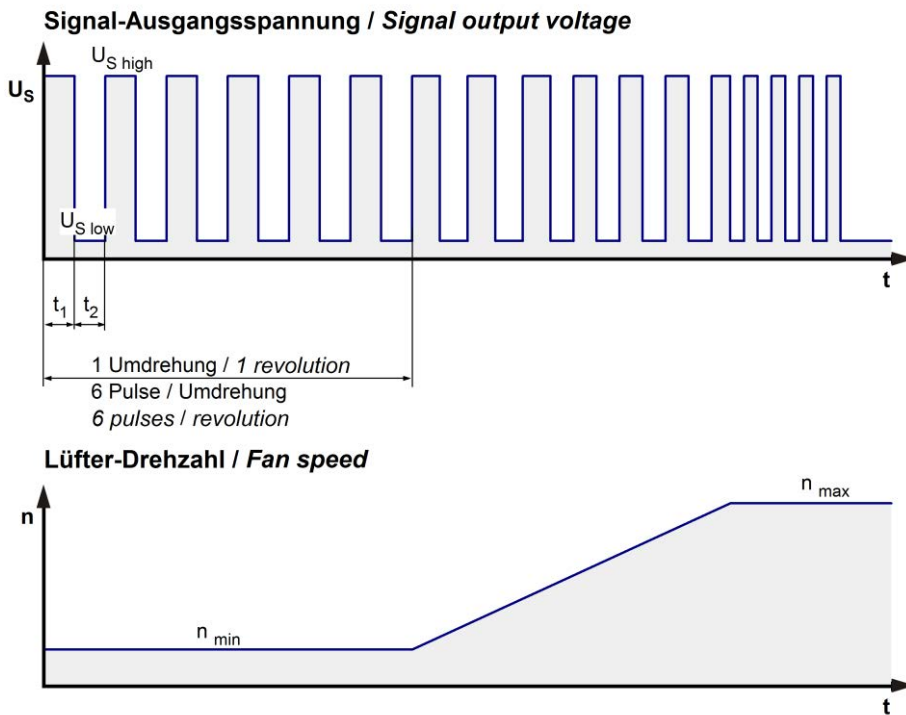

$$R_a = \frac{U_{BS} - U_{S\ low}}{I_{sink}}$$

Lüfter / Fan      Kunde / Customer

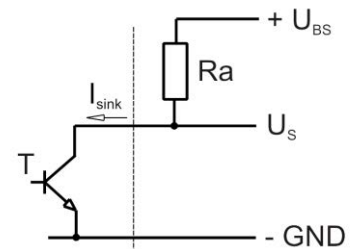

Features	Note	Values
Tacho operating voltage	$U_{BS}$	$\leq 60\ V$
Tacho signal Low	$U_{S\ low}$	$I_{sink}: 2\ mA$ $\leq 0,4\ V$
Tacho signal High	$U_{S\ high}$	$I_{source}: 0\ mA$ $\leq 60\ V$
Maximum sink current	$I_{sink}$	$\leq 20\ mA$
External resistor	External resistor $R_a$ from $U_{BS}$ to $U_S$ required. All voltages measured to GND.	
Tacho frequency	$(6 \times n) / 60$	550 Hz @ 5.500 1/min
Tacho isolated from motor	No	
Slew rate		$\geq 0,5\ V/\mu s$

$n$  = revolutions per minute (1/min)

**Please note:**

At zero speed the tacho signal is at a static HIGH. It will be also HIGH when the fan is still spinning, but the speed control signal is set to zero speed already.  
The tacho signal is only activated after the start-up is completed.

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	P-CH FET	
Max. residual current at $U_N$	$I_F \leq 2 \text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at $U_N$	$I_{block}$ approx. 1.500 mA	
Clock signal at locked rotor Extended Downtime	$t_3 / t_4$ typical: 2,5 s / 10,0 s $t_5$ : 40 s after 4 start-up tests	
Internal fuse	Littelfuse NANO2 > Very Fast-Acting > 451/453 Series 4A / 125V (Art.No.: 0451004.MRL)	
Voltage control *)	Fan turns on at $U_B > 32 \text{ V}$ or $< 76 \text{ V}$ Fan turns off at $U_B < 30 \text{ V}$ or $> 78 \text{ V}$	

\*) This fan has an undervoltage and overvoltage control circuit integrated which turns the motor off if the voltage is out of range.



First locked rotor off time is reduced to 3 seconds.

This fan has a startup delay of 2 seconds after applying supply voltage.

### 3.5 Aerodynamics


Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions. Power consumption of the fan motor when operating at normal voltage is shown. Depending on the operating conditions of the application, the power input may be higher.

a.) Operation condition:

5.500 1/min at free air flow	PWM 95 %; f: 2 kHz		
------------------------------	--------------------	--	--

Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )	600 m <sup>3</sup> /h	
Max. static pressure ( $\Delta p = \text{max.} / \dot{V} = 0$ )	660 Pa	

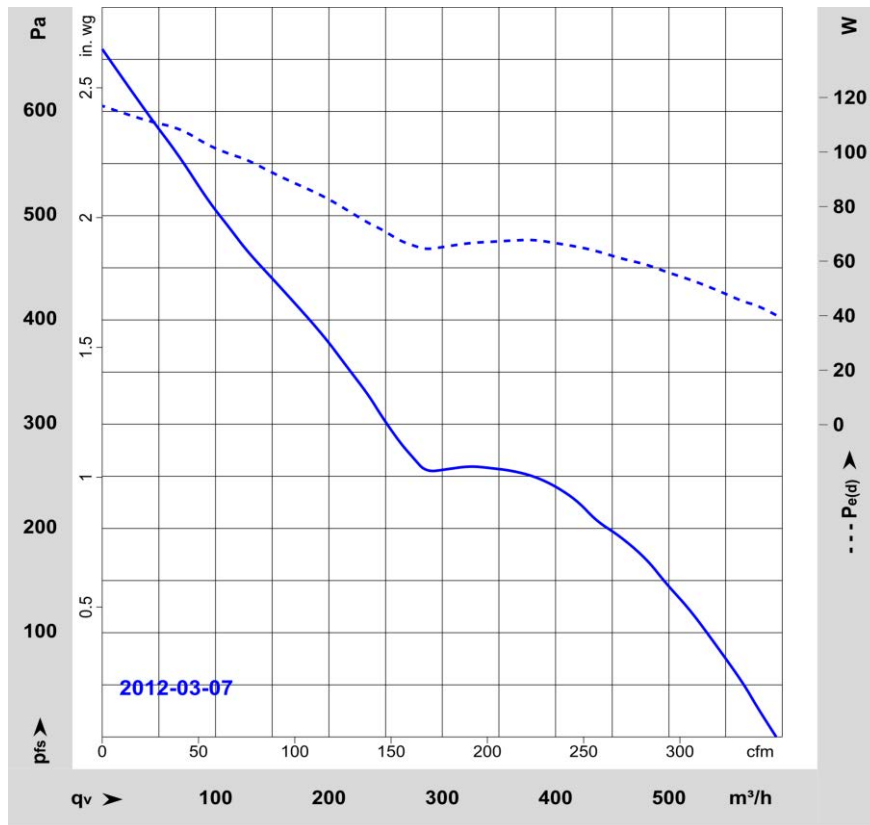

### 3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
Sound power level: According to ISO 10302-1  
Measured in a semianechoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB}(A)$   
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

5.500 1/min at free air flow	PWM 95 %; f: 2 kHz		
------------------------------	--------------------	--	--

Optimal operating point	380 m <sup>3</sup> /h @ 250 Pa		
Sound power level at the optimal operating point	7,2 bel(A)		
Sound pressure level at free air flow, measured in rubber bands	63,0 dB(A)		

## 4 Environment

### 4.1 General

Min. permitted ambient temperature TU min.	-20 °C		
Max. permitted ambient temperature TU max.	75 °C		
Min. permitted storage temperature TL min.	-40 °C		
Max. permitted storage temperature TL max.	80 °C		

### 4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days		
Water exposure	None		
Dust requirements	None		
Salt fog requirements	None		

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

Please require severity levels and specification parameters from the responsible development departments.

**5 Safety****5.1 Electrical Safety**

Dielectric strength DIN EN 62368 and DIN EN 60335 A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	1000 VAC / 1 Min.  1700 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	I	

**5.2 Approval Tests**

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans E38324
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 62368 - Audio/video, information and communication technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

The approval tests are observed to:


U approval max.: 72,0 V @ TU approval max.: 70,0 °C

**6 Reliability****6.1 General**

Life expectancy L10 at TU = 40 °C	70.000 h	
Life expectancy L10 at TU max.	27.500 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	117.500 h	

Questo è un documento di proprietà di Fansco e non deve essere ristampato o copiato senza permesso scritto. Per favore, non pubblicare questo documento su Internet o in altri modi. Tutti i diritti sono riservati.  
 This document is the property of Fansco and must not be reprinted or copied without written permission. Please do not publish this document on the Internet or in other ways. All rights reserved.

Die Zeichnung ist das geistige Eigentum von Fansco. Nachdruck, Verbreitung oder Kopieren ohne schriftliche Genehmigung ist ausdrücklich untersagt. Alle Rechte vorbehalten.  
 This drawing is the intellectual property of Fansco. Reproduction, distribution or copying without written permission is expressly prohibited. All rights reserved.

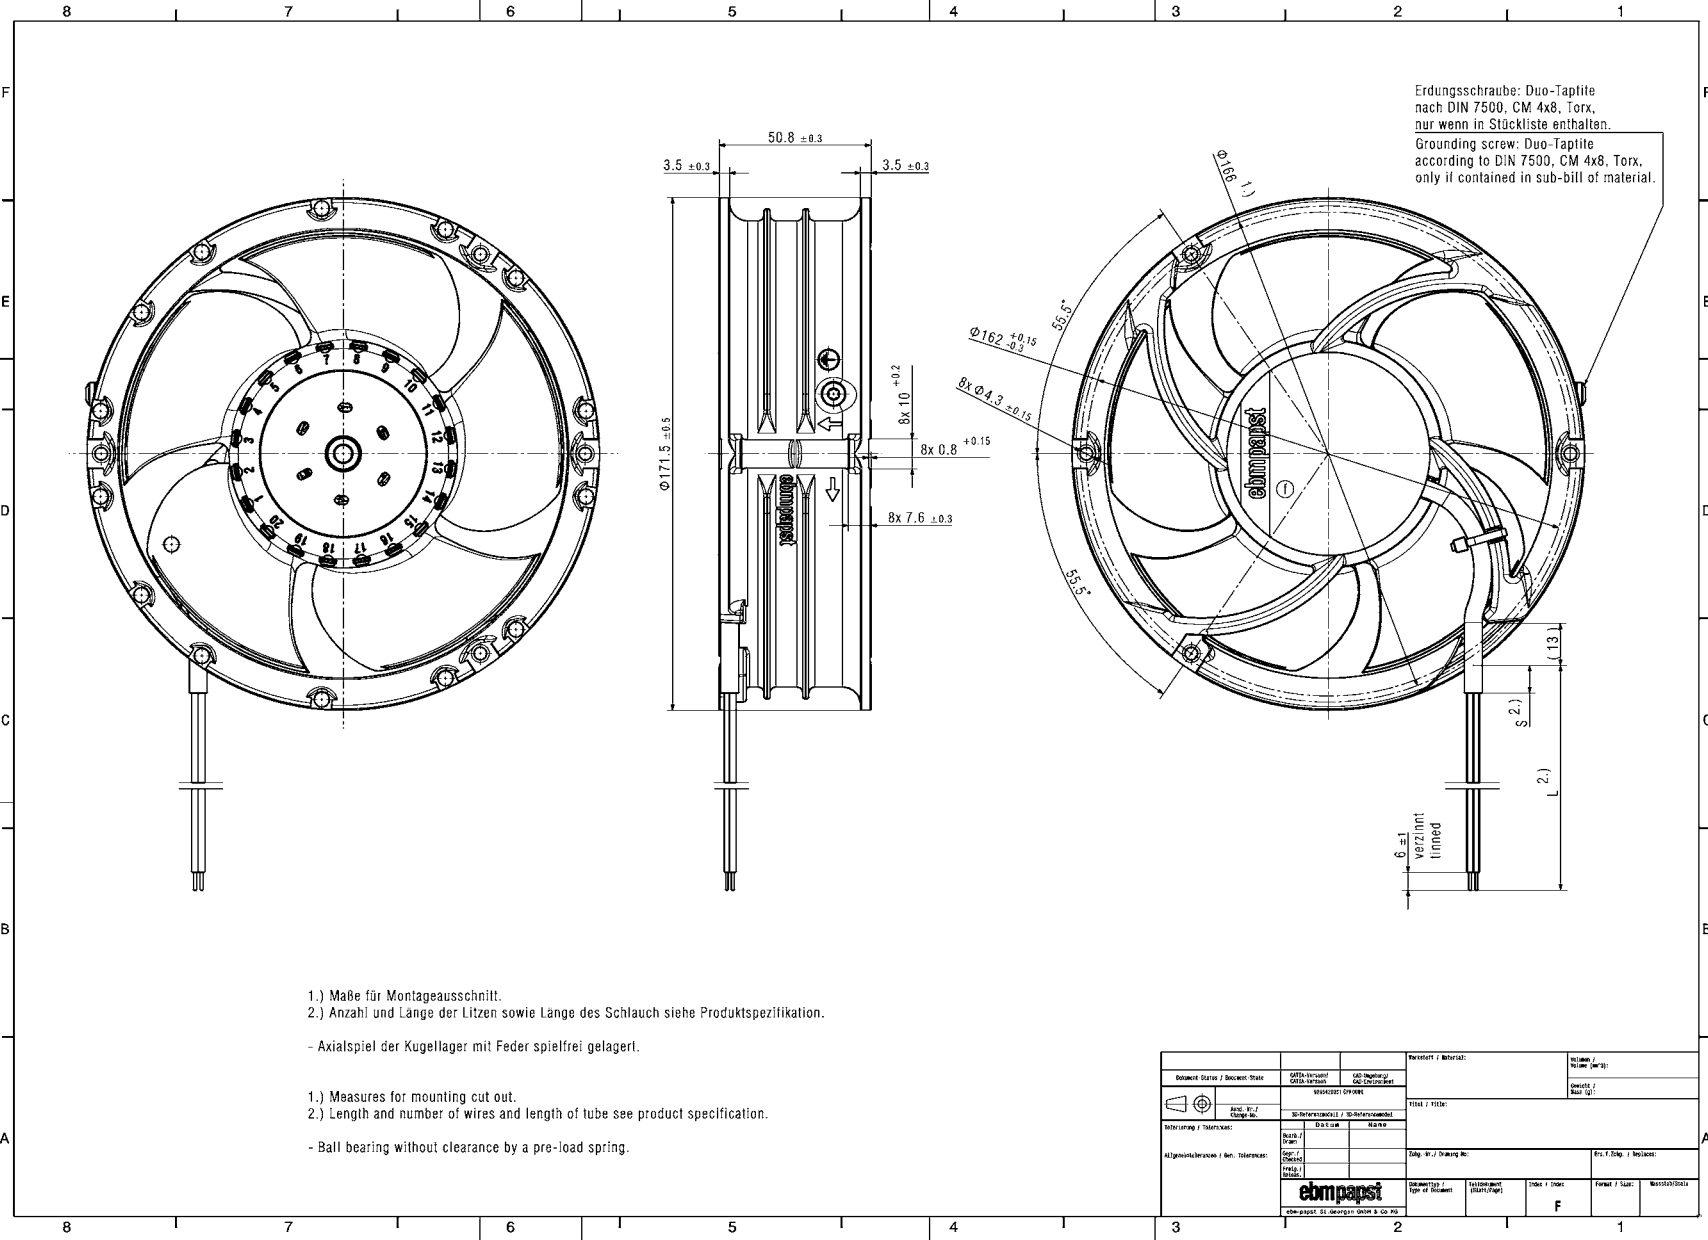

- 1.) Maße für Montageausschnitt.  
 2.) Anzahl und Länge der Litzen sowie Länge des Schlauch siehe Produktspezifikation.
- Axialspiel der Kugellager mit Feder spielfrei gelagert.
- 1.) Measures for mounting cut out.  
 2.) Length and number of wires and length of tube see product specification.
- Ball bearing without clearance by a pre-load spring.

Drawing Status / Document State 01: Approved / 02: In Progress / 03: On Hold / 04: Cancelled / 05: Deleted / 06: Archived / 07: Draft / 08: Released / 09: Withdrawn / 10: Obsolete / 11: Invalid / 12: Suspended / 13: Pending / 14: Incomplete / 15: Not Started / 16: Not Assigned / 17: Not Approved / 18: Not Valid / 19: Not Defined / 20: Not Known / 21: Not Specified / 22: Not Determined / 23: Not Available / 24: Not Accessible / 25: Not Reachable / 26: Not Found / 27: Not Listed / 28: Not Indexed / 29: Not Categorized / 30: Not Tagged / 31: Not Labeled / 32: Not Marked / 33: Not Identified / 34: Not Recognized / 35: Not Acknowledged / 36: Not Accepted / 37: Not Approved / 38: Not Validated / 39: Not Verified / 40: Not Confirmed / 41: Not Checked / 42: Not Reviewed / 43: Not Audited / 44: Not Inspected / 45: Not Tested / 46: Not Measured / 47: Not Analyzed / 48: Not Evaluated / 49: Not Assessed / 50: Not Monitored / 51: Not Tracked / 52: Not Recorded / 53: Not Documented / 54: Not Reported / 55: Not Communicated / 56: Not Shared / 57: Not Distributed / 58: Not Published / 59: Not Released / 60: Not Made Public / 61: Not Open / 62: Not Accessible / 63: Not Visible / 64: Not Searchable / 65: Not Indexable / 66: Not Linkable / 67: Not Embeddable / 68: Not Printable / 69: Not Copyable / 70: Not Movable / 71: Not Deletable / 72: Not Editable / 73: Not Updatable / 74: Not Configurable / 75: Not Customizable / 76: Not Adaptable / 77: Not Flexible / 78: Not Scalable / 79: Not Extensible / 80: Not Expandable / 81: Not Modifiable / 82: Not Changeable / 83: Not Adjustable / 84: Not Tunable / 85: Not Configurable / 86: Not Customizable / 87: Not Adaptable / 88: Not Flexible / 89: Not Scalable / 90: Not Extensible / 91: Not Expandable / 92: Not Modifiable / 93: Not Changeable / 94: Not Adjustable / 95: Not Tunable / 96: Not Configurable / 97: Not Customizable / 98: Not Adaptable / 99: Not Flexible / 100: Not Scalable / 101: Not Extensible / 102: Not Expandable / 103: Not Modifiable / 104: Not Changeable / 105: Not Adjustable / 106: Not Tunable / 107: Not Configurable / 108: Not Customizable / 109: Not Adaptable / 110: Not Flexible / 111: Not Scalable / 112: Not Extensible / 113: Not Expandable / 114: Not Modifiable / 115: Not Changeable / 116: Not Adjustable / 117: Not Tunable / 118: Not Configurable / 119: Not Customizable / 120: Not Adaptable / 121: Not Flexible / 122: Not Scalable / 123: Not Extensible / 124: Not Expandable / 125: Not Modifiable / 126: Not Changeable / 127: Not Adjustable / 128: Not Tunable / 129: Not Configurable / 130: Not Customizable / 131: Not Adaptable / 132: Not Flexible / 133: Not Scalable / 134: Not Extensible / 135: Not Expandable / 136: Not Modifiable / 137: Not Changeable / 138: Not Adjustable / 139: Not Tunable / 140: Not Configurable / 141: Not Customizable / 142: Not Adaptable / 143: Not Flexible / 144: Not Scalable / 145: Not Extensible / 146: Not Expandable / 147: Not Modifiable / 148: Not Changeable / 149: Not Adjustable / 150: Not Tunable / 151: Not Configurable / 152: Not Customizable / 153: Not Adaptable / 154: Not Flexible / 155: Not Scalable / 156: Not Extensible / 157: Not Expandable / 158: Not Modifiable / 159: Not Changeable / 160: Not Adjustable / 161: Not Tunable / 162: Not Configurable / 163: Not Customizable / 164: Not Adaptable / 165: Not Flexible / 166: Not Scalable / 167: Not Extensible / 168: Not Expandable / 169: Not Modifiable / 170: Not Changeable / 171: Not Adjustable / 172: Not Tunable / 173: Not Configurable / 174: Not Customizable / 175: Not Adaptable / 176: Not Flexible / 177: Not Scalable / 178: Not Extensible / 179: Not Expandable / 180: Not Modifiable / 181: Not Changeable / 182: Not Adjustable / 183: Not Tunable / 184: Not Configurable / 185: Not Customizable / 186: Not Adaptable / 187: Not Flexible / 188: Not Scalable / 189: Not Extensible / 190: Not Expandable / 191: Not Modifiable / 192: Not Changeable / 193: Not Adjustable / 194: Not Tunable / 195: Not Configurable / 196: Not Customizable / 197: Not Adaptable / 198: Not Flexible / 199: Not Scalable / 200: Not Extensible / 201: Not Expandable / 202: Not Modifiable / 203: Not Changeable / 204: Not Adjustable / 205: Not Tunable / 206: Not Configurable / 207: Not Customizable / 208: Not Adaptable / 209: Not Flexible / 210: Not Scalable / 211: Not Extensible / 212: Not Expandable / 213: Not Modifiable / 214: Not Changeable / 215: Not Adjustable / 216: Not Tunable / 217: Not Configurable / 218: Not Customizable / 219: Not Adaptable / 220: Not Flexible / 221: Not Scalable / 222: Not Extensible / 223: Not Expandable / 224: Not Modifiable / 225: Not Changeable / 226: Not Adjustable / 227: Not Tunable / 228: Not Configurable / 229: Not Customizable / 230: Not Adaptable / 231: Not Flexible / 232: Not Scalable / 233: Not Extensible / 234: Not Expandable / 235: Not Modifiable / 236: Not Changeable / 237: Not Adjustable / 238: Not Tunable / 239: Not Configurable / 240: Not Customizable / 241: Not Adaptable / 242: Not Flexible / 243: Not Scalable / 244: Not Extensible / 245: Not Expandable / 246: Not Modifiable / 247: Not Changeable / 248: Not Adjustable / 249: Not Tunable / 250: Not Configurable / 251: Not Customizable / 252: Not Adaptable / 253: Not Flexible / 254: Not Scalable / 255: Not Extensible / 256: Not Expandable / 257: Not Modifiable / 258: Not Changeable / 259: Not Adjustable / 260: Not Tunable / 261: Not Configurable / 262: Not Customizable / 263: Not Adaptable / 264: Not Flexible / 265: Not Scalable / 266: Not Extensible / 267: Not Expandable / 268: Not Modifiable / 269: Not Changeable / 270: Not Adjustable / 271: Not Tunable / 272: Not Configurable / 273: Not Customizable / 274: Not Adaptable / 275: Not Flexible / 276: Not Scalable / 277: Not Extensible / 278: Not Expandable / 279: Not Modifiable / 280: Not Changeable / 281: Not Adjustable / 282: Not Tunable / 283: Not Configurable / 284: Not Customizable / 285: Not Adaptable / 286: Not Flexible / 287: Not Scalable / 288: Not Extensible / 289: Not Expandable / 290: Not Modifiable / 291: Not Changeable / 292: Not Adjustable / 293: Not Tunable / 294: Not Configurable / 295: Not Customizable / 296: Not Adaptable / 297: Not Flexible / 298: Not Scalable / 299: Not Extensible / 300: Not Expandable / 301: Not Modifiable / 302: Not Changeable / 303: Not Adjustable / 304: Not Tunable / 305: Not Configurable / 306: Not Customizable / 307: Not Adaptable / 308: Not Flexible / 309: Not Scalable / 310: Not Extensible / 311: Not Expandable / 312: Not Modifiable / 313: Not Changeable / 314: Not Adjustable / 315: Not Tunable / 316: Not Configurable / 317: Not Customizable / 318: Not Adaptable / 319: Not Flexible / 320: Not Scalable / 321: Not Extensible / 322: Not Expandable / 323: Not Modifiable / 324: Not Changeable / 325: Not Adjustable / 326: Not Tunable / 327: Not Configurable / 328: Not Customizable / 329: Not Adaptable / 330: Not Flexible / 331: Not Scalable / 332: Not Extensible / 333: Not Expandable / 334: Not Modifiable / 335: Not Changeable / 336: Not Adjustable / 337: Not Tunable / 338: Not Configurable / 339: Not Customizable / 340: Not Adaptable / 341: Not Flexible / 342: Not Scalable / 343: Not Extensible / 344: Not Expandable / 345: Not Modifiable / 346: Not Changeable / 347: Not Adjustable / 348: Not Tunable / 349: Not Configurable / 350: Not Customizable / 351: Not Adaptable / 352: Not Flexible / 353: Not Scalable / 354: Not Extensible / 355: Not Expandable / 356: Not Modifiable / 357: Not Changeable / 358: Not Adjustable / 359: Not Tunable / 360: Not Configurable / 361: Not Customizable / 362: Not Adaptable / 363: Not Flexible / 364: Not Scalable / 365: Not Extensible / 366: Not Expandable / 367: Not Modifiable / 368: Not Changeable / 369: Not Adjustable / 370: Not Tunable / 371: Not Configurable / 372: Not Customizable / 373: Not Adaptable / 374: Not Flexible / 375: Not Scalable / 376: Not Extensible / 377: Not Expandable / 378: Not Modifiable / 379: Not Changeable / 380: Not Adjustable / 381: Not Tunable / 382: Not Configurable / 383: Not Customizable / 384: Not Adaptable / 385: Not Flexible / 386: Not Scalable / 387: Not Extensible / 388: Not Expandable / 389: Not Modifiable / 390: Not Changeable / 391: Not Adjustable / 392: Not Tunable / 393: Not Configurable / 394: Not Customizable / 395: Not Adaptable / 396: Not Flexible / 397: Not Scalable / 398: Not Extensible / 399: Not Expandable / 400: Not Modifiable / 401: Not Changeable / 402: Not Adjustable / 403: Not Tunable / 404: Not Configurable / 405: Not Customizable / 406: Not Adaptable / 407: Not Flexible / 408: Not Scalable / 409: Not Extensible / 410: Not Expandable / 411: Not Modifiable / 412: Not Changeable / 413: Not Adjustable / 414: Not Tunable / 415: Not Configurable / 416: Not Customizable / 417: Not Adaptable / 418: Not Flexible / 419: Not Scalable / 420: Not Extensible / 421: Not Expandable / 422: Not Modifiable / 423: Not Changeable / 424: Not Adjustable / 425: Not Tunable / 426: Not Configurable / 427: Not Customizable / 428: Not Adaptable / 429: Not Flexible / 430: Not Scalable / 431: Not Extensible / 432: Not Expandable / 433: Not Modifiable / 434: Not Changeable / 435: Not Adjustable / 436: Not Tunable / 437: Not Configurable / 438: Not Customizable / 439: Not Adaptable / 440: Not Flexible / 441: Not Scalable / 442: Not Extensible / 443: Not Expandable / 444: Not Modifiable / 445: Not Changeable / 446: Not Adjustable / 447: Not Tunable / 448: Not Configurable / 449: Not Customizable / 450: Not Adaptable / 451: Not Flexible / 452: Not Scalable / 453: Not Extensible / 454: Not Expandable / 455: Not Modifiable / 456: Not Changeable / 457: Not Adjustable / 458: Not Tunable / 459: Not Configurable / 460: Not Customizable / 461: Not Adaptable / 462: Not Flexible / 463: Not Scalable / 464: Not Extensible / 465: Not Expandable / 466: Not Modifiable / 467: Not Changeable / 468: Not Adjustable / 469: Not Tunable / 470: Not Configurable / 471: Not Customizable / 472: Not Adaptable / 473: Not Flexible / 474: Not Scalable / 475: Not Extensible / 476: Not Expandable / 477: Not Modifiable / 478: Not Changeable / 479: Not Adjustable / 480: Not Tunable / 481: Not Configurable / 482: Not Customizable / 483: Not Adaptable / 484: Not Flexible / 485: Not Scalable / 486: Not Extensible / 487: Not Expandable / 488: Not Modifiable / 489: Not Changeable / 490: Not Adjustable / 491: Not Tunable / 492: Not Configurable / 493: Not Customizable / 494: Not Adaptable / 495: Not Flexible / 496: Not Scalable / 497: Not Extensible / 498: Not Expandable / 499: Not Modifiable / 500: Not Changeable / 501: Not Adjustable / 502: Not Tunable / 503: Not Configurable / 504: Not Customizable / 505: Not Adaptable / 506: Not Flexible / 507: Not Scalable / 508: Not Extensible / 509: Not Expandable / 510: Not Modifiable / 511: Not Changeable / 512: Not Adjustable / 513: Not Tunable / 514: Not Configurable / 515: Not Customizable / 516: Not Adaptable / 517: Not Flexible / 518: Not Scalable / 519: Not Extensible / 520: Not Expandable / 521: Not Modifiable / 522: Not Changeable / 523: Not Adjustable / 524: Not Tunable / 525: Not Configurable / 526: Not Customizable / 527: Not Adaptable / 528: Not Flexible / 529: Not Scalable / 530: Not Extensible / 531: Not Expandable / 532: Not Modifiable / 533: Not Changeable / 534: Not Adjustable / 535: Not Tunable / 536: Not Configurable / 537: Not Customizable / 538: Not Adaptable / 539: Not Flexible / 540: Not Scalable / 541: Not Extensible / 542: Not Expandable / 543: Not Modifiable / 544: Not Changeable / 545: Not Adjustable / 546: Not Tunable / 547: Not Configurable / 548: Not Customizable / 549: Not Adaptable / 550: Not Flexible / 551: Not Scalable / 552: Not Extensible / 553: Not Expandable / 554: Not Modifiable / 555: Not Changeable / 556: Not Adjustable / 557: Not Tunable / 558: Not Configurable / 559: Not Customizable / 560: Not Adaptable / 561: Not Flexible / 562: Not Scalable / 563: Not Extensible / 564: Not Expandable / 565: Not Modifiable / 566: Not Changeable / 567: Not Adjustable / 568: Not Tunable / 569: Not Configurable / 570: Not Customizable / 571: Not Adaptable / 572: Not Flexible / 573: Not Scalable / 574: Not Extensible / 575: Not Expandable / 576: Not Modifiable / 577: Not Changeable / 578: Not Adjustable / 579: Not Tunable / 580: Not Configurable / 581: Not Customizable / 582: Not Adaptable / 583: Not Flexible / 584: Not Scalable / 585: Not Extensible / 586: Not Expandable / 587: Not Modifiable / 588: Not Changeable / 589: Not Adjustable / 590: Not Tunable / 591: Not Configurable / 592: Not Customizable / 593: Not Adaptable / 594: Not Flexible / 595: Not Scalable / 596: Not Extensible / 597: Not Expandable / 598: Not Modifiable / 599: Not Changeable / 600: Not Adjustable / 601: Not Tunable / 602: Not Configurable / 603: Not Customizable / 604: Not Adaptable / 605: Not Flexible / 606: Not Scalable / 607: Not Extensible / 608: Not Expandable / 609: Not Modifiable / 610: Not Changeable / 611: Not Adjustable / 612: Not Tunable / 613: Not Configurable / 614: Not Customizable / 615: Not Adaptable / 616: Not Flexible / 617: Not Scalable / 618: Not Extensible / 619: Not Expandable / 620: Not Modifiable / 621: Not Changeable / 622: Not Adjustable / 623: Not Tunable / 624: Not Configurable / 625: Not Customizable / 626: Not Adaptable / 627: Not Flexible / 628: Not Scalable / 629: Not Extensible / 630: Not Expandable / 631: Not Modifiable / 632: Not Changeable / 633: Not Adjustable / 634: Not Tunable / 635: Not Configurable / 636: Not Customizable / 637: Not Adaptable / 638: Not Flexible / 639: Not Scalable / 640: Not Extensible / 641: Not Expandable / 642: Not Modifiable / 643: Not Changeable / 644: Not Adjustable / 645: Not Tunable / 646: Not Configurable / 647: Not Customizable / 648: Not Adaptable / 649: Not Flexible / 650: Not Scalable / 651: Not Extensible / 652: Not Expandable / 653: Not Modifiable / 654: Not Changeable / 655: Not Adjustable / 656: Not Tunable / 657: Not Configurable / 658: Not Customizable / 659: Not Adaptable / 660: Not Flexible / 661: Not Scalable / 662: Not Extensible / 663: Not Expandable / 664: Not Modifiable / 665: Not Changeable / 666: Not Adjustable / 667: Not Tunable / 668: Not Configurable / 669: Not Customizable / 670: Not Adaptable / 671: Not Flexible / 672: Not Scalable / 673: Not Extensible / 674: Not Expandable / 675: Not Modifiable / 676: Not Changeable / 677: Not Adjustable / 678: Not Tunable / 679: Not Configurable / 680: Not Customizable / 681: Not Adaptable / 682: Not Flexible / 683: Not Scalable / 684: Not Extensible / 685: Not Expandable / 686: Not Modifiable / 687: Not Changeable / 688: Not Adjustable / 689: Not Tunable / 690: Not Configurable / 691: Not Customizable / 692: Not Adaptable / 693: Not Flexible / 694: Not Scalable / 695: Not Extensible / 696: Not Expandable / 697: Not Modifiable / 698: Not Changeable / 699: Not Adjustable / 700: Not Tunable / 701: Not Configurable / 702: Not Customizable / 703: Not Adaptable / 704: Not Flexible / 705: Not Scalable / 706: Not Extensible / 707: Not Expandable / 708: Not Modifiable / 709: Not Changeable / 710: Not Adjustable / 711: Not Tunable / 712: Not Configurable / 713: Not Customizable / 714: Not Adaptable / 715: Not Flexible / 716: Not Scalable / 717: Not Extensible / 718: Not Expandable / 719: Not Modifiable / 720: Not Changeable / 721: Not Adjustable / 722: Not Tunable / 723: Not Configurable / 724: Not Customizable / 725: Not Adaptable / 726: Not Flexible / 727: Not Scalable / 728: Not Extensible / 729: Not Expandable / 730: Not Modifiable / 731: Not Changeable / 732: Not Adjustable / 733: Not Tunable / 734: Not Configurable / 735: Not Customizable / 736: Not Adaptable / 737: Not Flexible / 738: Not Scalable / 739: Not Extensible / 740: Not Expandable / 741: Not Modifiable / 742: Not Changeable / 743: Not Adjustable / 744: Not Tunable / 745: Not Configurable / 746: Not Customizable / 747: Not Adaptable / 748: Not Flexible / 749: Not Scalable / 750: Not Extensible / 751: Not Expandable / 752: Not Modifiable / 753: Not Changeable / 754: Not Adjustable / 755: Not Tunable / 756: Not Configurable / 757: Not Customizable / 758: Not Adaptable / 759: Not Flexible / 760: Not Scalable / 761: Not Extensible / 762: Not Expandable / 763: Not Modifiable / 764: Not Changeable / 765: Not Adjustable / 766: Not Tunable / 767: Not Configurable / 768: Not Customizable / 769: Not Adaptable / 770: Not Flexible / 771: Not Scalable / 772: Not Extensible / 773: Not Expandable / 774: Not Modifiable / 775: Not Changeable / 776: Not Adjustable / 777: Not Tunable / 778: Not Configurable / 779: Not Customizable / 780: Not Adaptable / 781: Not Flexible / 782: Not Scalable / 783: Not Extensible / 784: Not Expandable / 785: Not Modifiable / 786: Not Changeable / 787: Not Adjustable / 788: Not Tunable / 789: Not Configurable / 790: Not Customizable / 791: Not Adaptable / 792: Not Flexible / 793: Not Scalable / 794: Not Extensible / 795: Not Expandable / 796: Not Modifiable / 797: Not Changeable / 798: Not Adjustable / 799: Not Tunable / 800: Not Configurable / 801: Not Customizable / 802: Not Adaptable / 803: Not Flexible / 804: Not Scalable / 805: Not Extensible / 806: Not Expandable / 807: Not Modifiable / 808: Not Changeable / 809: Not Adjustable / 810: Not Tunable / 811: Not Configurable / 812: Not Customizable / 813: Not Adaptable / 814: Not Flexible / 815: Not Scalable / 816: Not Extensible / 817: Not Expandable / 818: Not Modifiable / 819: Not Changeable / 820: Not Adjustable / 821: Not Tunable / 822: Not Configurable / 823: Not Customizable / 824: Not Adaptable / 825: Not Flexible / 826: Not Scalable / 827: Not Extensible / 828: Not Expandable / 829: Not Modifiable / 830: Not Changeable / 831: Not Adjustable / 832: Not Tunable / 833: Not Configurable / 834: Not Customizable / 835: Not Adaptable / 836: Not Flexible / 837: Not Scalable / 838: Not Extensible / 839: Not Expandable / 840: Not Modifiable / 841: Not Changeable / 842: Not Adjustable / 843: Not Tunable / 844: Not Configurable / 845: Not Customizable / 846: Not Adaptable / 847: Not Flexible / 848: Not Scalable / 849: Not Extensible / 850: Not Expandable / 851: Not Modifiable / 852: Not Changeable / 853: Not Adjustable / 854: Not Tunable / 855: Not Configurable / 856: Not Customizable / 857: Not Adaptable / 858: Not Flexible / 859: Not Scalable / 860: Not Extensible / 861: Not Expandable / 862: Not Modifiable / 863: Not Changeable / 864: Not Adjustable / 865: Not Tunable / 866: Not Configurable / 867: Not Customizable / 868: Not Adaptable / 869: Not Flexible / 870: Not Scalable / 871: Not Extensible / 872: Not Expandable / 873: Not Modifiable / 874: Not Changeable / 875: Not Adjustable / 876: Not Tunable / 877: Not Configurable / 878: Not Customizable / 879: Not Adaptable / 880: Not Flexible / 881: Not Scalable / 882: Not Extensible / 883: Not Expandable / 884: Not Modifiable / 885: Not Changeable / 886: Not Adjustable / 887: Not Tunable / 888: Not Configurable / 889: Not Customizable / 890: Not Adaptable / 891: Not Flexible / 892: Not Scalable / 893: Not Extensible / 894: Not Expandable / 895: Not Modifiable / 896: Not Changeable / 897: Not Adjustable / 898: Not Tunable / 899: Not Configurable / 900: Not Customizable / 901: Not Adaptable / 902: Not Flexible / 903: Not Scalable / 904: Not Extensible / 905: Not Expandable / 906: Not Modifiable / 907: Not Changeable / 908: Not Adjustable / 909: Not Tunable / 910: Not Configurable / 911: Not Customizable / 912: Not Adaptable / 913: Not Flexible / 914: Not Scalable / 915: Not Extensible / 916: Not Expandable / 917: Not Modifiable / 918: Not Changeable / 919: Not Adjustable / 920: Not Tunable / 921: Not Configurable / 922: Not Customizable / 923: Not Adaptable / 924: Not Flexible / 925: Not Scalable / 926: Not Extensible / 927: Not Expandable / 928: Not Modifiable / 929: Not Changeable / 930: Not Adjustable / 931: Not Tunable / 932: Not Configurable / 933: Not Customizable / 934: Not Adaptable / 935: Not Flexible / 936: Not Scalable / 937: Not Extensible / 938: Not Expandable / 939: Not Modifiable / 940: Not Changeable / 941: Not Adjustable / 942: Not Tunable / 943: Not Configurable / 944: Not Customizable / 945: Not Adaptable / 946: Not Flexible / 947: Not Scalable / 948: Not Extensible / 949: Not Expandable / 950: Not Modifiable / 951: Not Changeable / 952: Not Adjustable / 953: Not Tunable / 954: Not Configurable / 955: Not Customizable / 956: Not Adaptable / 957: Not Flexible / 958: Not Scalable / 959: Not Extensible / 960: Not Expandable / 961: Not Modifiable / 962: Not Changeable / 963: Not Adjustable / 964: Not Tunable / 965: Not Configurable / 966: Not Customizable / 967: Not Adaptable / 968: Not Flexible / 969: Not Scalable / 970: Not Extensible / 971: Not Expandable / 972: Not Modifiable / 973: Not Changeable / 974: Not Adjustable / 975: Not Tunable / 976: Not Configurable / 977: Not Customizable / 978: Not Adaptable / 979: Not Flexible / 980: Not Scalable / 981: Not Extensible / 982: Not Expandable / 983: Not Modifiable / 984: Not Changeable / 985: Not Adjustable / 986: Not Tunable / 987: Not Configurable / 988: Not Customizable / 989: Not Adaptable / 990: Not Flexible / 991: Not Scalable / 992: Not Extensible / 993: Not Expandable / 994: Not Modifiable / 995: Not Changeable / 996: Not Adjustable / 997: Not Tunable / 998: Not Configurable / 999: Not Customizable / 1000: Not Adaptable / 1001: Not Flexible / 1002: Not Scalable / 1003: Not Extensible / 1004: Not Expandable / 1005: Not Modifiable / 1006: Not Changeable / 1007: Not Adjustable / 1008: Not Tunable / 1009: Not Configurable / 1010: Not Customizable / 1011: Not Adaptable / 1012: Not Flexible / 1013: Not Scalable / 1014: Not Extensible / 1015: Not Expandable / 1016: Not Modifiable / 1017: Not Changeable / 1018: Not Adjustable / 1019: Not Tunable / 1020: Not Configurable / 1021: Not Customizable / 1022: Not Adaptable / 1023: Not Flexible / 1024: Not Scalable / 1025: Not Extensible / 1026: Not Expandable / 1027: Not Modifiable / 1028: Not Changeable / 1029: Not Adjustable / 1030: Not Tunable / 1031: Not Configurable / 1032: Not Customizable / 1033: Not Adaptable / 1034: Not Flexible / 1035: Not Scalable / 1036: Not Extensible / 1037: Not Expandable / 1038: Not Modifiable / 1039: Not Changeable / 1040: Not Adjustable / 1041: Not Tunable / 1042: Not Configurable / 1043: Not Customizable / 1044: Not Adaptable / 1045: Not Flexible / 1046: Not Scalable / 1047: Not Extensible / 1048: Not Expandable / 1049: Not Modifiable / 1050: Not Changeable / 1051: Not Adjustable / 1052: Not Tunable / 1053: Not Configurable / 1054: Not Customizable / 1055: Not Adaptable / 1056: Not Flexible / 1057: Not Scalable / 1058: Not Extensible / 1059: Not Expandable / 1060: Not Modifiable / 1061: Not Changeable / 1062: Not Adjustable / 1063: Not Tunable / 1064: Not Configurable / 1065: Not Customizable / 1066: Not Adaptable / 1067: Not Flexible / 1068: Not Scalable / 1069: Not Extensible / 1070: Not Expandable / 1071: Not Modifiable / 1072: Not Changeable / 1073: Not Adjustable / 1074: Not Tunable / 1075: Not Configurable / 1076: Not Customizable / 1077: Not Adaptable / 1078: Not Flexible / 1079: Not Scalable / 1080: Not Extensible / 1081: Not Expandable / 1082: Not Modifiable / 1083: Not Changeable / 1084: Not Adjustable / 1085: Not Tunable / 1086: Not Configurable / 1087: Not Customizable / 1088: Not Adaptable / 1089: Not Flexible / 1090: Not Scalable / 1091: Not Extensible / 1092: Not Expandable / 1093: Not Modifiable / 1094: Not Changeable / 1095: Not Adjustable / 1096: Not Tunable / 1097: Not Configurable / 1098: Not Customizable / 1099: Not Adaptable / 1100: Not Flexible / 1101: Not Scalable / 1102: Not Extensible / 1103: Not Expandable / 1104: Not Modifiable / 1105: Not Changeable / 1106: Not Adjustable / 1107: Not Tunable / 1108: Not Configurable / 1109: Not Customizable / 1110: Not Adaptable / 1111: Not Flexible / 1112: Not Scalable / 1113: Not Extensible / 1114: Not Expandable / 1115: Not Modifiable / 1116: Not Changeable / 1117: Not Adjustable / 1118: Not Tunable / 1119: Not Configurable / 1120: Not Customizable / 1121: Not Adaptable / 1122: Not Flexible / 1123: Not Scalable / 1124: Not Extensible / 1125: Not Expandable / 1126: Not Modifiable / 1127: Not Changeable / 1128: Not Adjustable / 1129: Not Tunable / 1130: Not Configurable / 1131: Not Customizable / 1132: Not Adaptable / 1133: Not Flexible / 1134: Not Scalable / 1135: Not Extensible / 1136: Not Expandable / 1137: Not Modifiable / 1138: Not Changeable / 1139: Not Adjustable / 1140: Not Tunable / 1141: Not Configurable / 1142: Not Customizable / 1143: Not Adaptable / 1144: Not Flexible / 1145: Not Scalable / 1146: Not Extensible / 1147: Not Expandable / 1148: Not Modifiable / 1149: Not Changeable / 1150: Not Adjustable / 1151: Not Tunable / 1152: Not Configurable / 1153: Not Customizable / 1154: Not Adaptable / 1155: Not Flexible / 1156: Not Scalable / 1157: Not Extensible / 1158: Not Expandable / 1159: Not Modifiable / 1160: Not Changeable / 1161: Not Adjustable / 1162: Not Tunable / 1163: Not Configurable / 1164: Not Customizable / 1165: Not Adaptable / 1166: Not Flexible / 1167: Not Scalable / 1168: Not Extensible / 1169: Not Expandable / 1170: Not Modifiable / 1171: Not Changeable / 1172: Not Adjustable / 1173: Not Tunable / 1174: Not Configurable / 1175: Not Customizable / 1176: Not Adaptable / 1177: Not Flexible / 1178: Not Scalable / 1179: Not Extensible / 1180: Not Expandable / 1181: Not Modifiable / 1182: Not Changeable / 1183: Not Adjustable / 1184: Not Tunable / 1185: Not Configurable / 1186: Not Customizable / 1187: Not Adaptable / 1188: Not Flexible / 1189: Not Scalable / 1190: Not Extensible / 1191: Not Expandable / 1192: Not Modifiable / 1193: Not Changeable / 1194: Not Adjustable / 1195: Not Tunable / 1196: Not Configurable / 1197: Not Customizable / 1198: Not Adaptable / 1199: Not Flexible / 1200: Not Scalable / 1201: Not Extensible / 1202: Not Expandable / 1203: Not Modifiable / 1204: Not Changeable / 1205: Not Adjustable / 1206: Not Tunable / 1207: Not Configurable / 1208: Not Customizable / 1209: Not Adaptable / 1210: Not Flexible / 1211: Not Scalable / 1212: Not Extensible / 1213: Not Expandable / 1214: Not Modifiable / 1215: Not Changeable / 1216: Not Adjustable / 1217: Not Tunable / 1218: Not Configurable / 1219: Not Customizable / 1220: Not Adaptable / 1221: Not Flexible / 1222: Not Scalable / 1223: Not Extensible / 1224: Not Expandable / 1225: Not Modifiable / 1226: Not Changeable / 1227: Not Adjustable / 1228: Not Tunable / 1229: Not Configurable / 1230: Not Customizable / 1231: Not Adaptable / 1232: Not Flexible / 1233: Not Scalable / 1234: Not Extensible / 1235: Not Expandable / 1236: Not Modifiable / 1237: Not Changeable / 1238: Not Adjustable / 1239: Not Tunable / 1240: Not Configurable / 1241: Not Customizable / 1242: Not Adaptable / 1243: Not Flexible / 1244: Not Scalable / 1245: Not Extensible / 1246: Not Expandable / 1247: Not Modifiable / 1248: Not Changeable / 1249: Not Adjustable / 1250: Not Tunable / 1251: Not Configurable / 1252: Not Customizable / 1253: Not Adaptable / 1254: Not Flexible / 1255: Not Scalable / 1256: Not Extensible / 1257: Not Expandable / 1258: Not Modifiable / 1259: Not Changeable / 1260: Not Adjustable / 1261: Not Tunable / 1262: Not Configurable / 1263: Not Customizable / 1264: Not Adaptable / 1265: Not Flexible / 1266: Not Scalable / 1267: Not Extensible / 1268: Not Expandable / 1269: Not Modifiable / 1270: Not Changeable / 1271: Not Adjustable / 1272: Not Tunable / 1273: Not Configurable / 1274: Not Customizable / 1275: Not Adaptable / 1276: Not Flexible / 1277: Not Scalable / 1278: Not Extensible / 1279: Not Expandable / 1280: Not Modifiable / 1281: Not Changeable / 1282: Not Adjustable / 1283: Not Tunable / 1284: Not Configurable / 1285: Not Customizable / 1286: Not Adaptable / 1287: Not Flexible / 1288: Not Scalable / 1289: Not Extensible / 1290: Not Expandable / 1291: Not Modifiable / 1292: Not Changeable / 1293: Not Adjustable / 1294: Not Tunable / 1295: Not Configurable / 1296: Not Customizable / 1297: Not Adaptable / 1298: Not Flexible / 1299: Not Scalable / 1300: Not Extensible / 1301: Not Expandable / 1302: Not Modifiable / 13	
---	--