



5218 N/2HHP-207

Customer specification: No
Version: 1.0
Created: 23.07.2009
technical project manager:
Langeneck, Gunter, 561

5218N/2HHP-207 (9694320207) ebmpapst Datasheet FansCo
sales@fansco.com
www.fansco.com

INDEX

1	General	2
2	Mechanics	2
2.1	General.....	2
2.2	Motor	2
2.3	Connections.....	3
3	Operating Data	4
3.1	Operating Data - Electrical Interface - Input.....	4
3.2	Electrical Operating Data.....	5
3.3	Operating Data - Electrical Interface -Output	6
3.4	Electrical Features	7
3.5	Aerodynamic.....	8
3.6	Sound Data.....	8
4	Environment	8
4.1	General.....	8
4.2	Climatic requirements.....	8
4.3	Mechanical requirements	9
4.4	EMC	9
5	Safety	9
5.1	Electrical Safety	9
5.2	Approval Tests	9
6	Reliability	10
6.1	General.....	10
6.2	Additional Data.....	10

Special features according to QMH 2-5.4.7 and company standard 1-23.00 have the following definitions:

"A" : Product features or process parameters which influence the safety of a product or the compliance of legal requirements. (Must not necessary verified and documented 100%. Standards and legal requirements must be considered.)

"FK" : Product features or process parameters which influence the fit and function of a product or which have to be controlled or documented for some other reasons (e.g. Customer requirements).



1 General

Fan type	Fan	
Rotational direction looking at rotor	counterclockwise	FK
Airflow direction	Air outlet over struts	FK
Bearing system	Ball bearing	
Lubrication	see sectional drawing of the bearing	
Mounting position	any	
Tolerance		
Balancing grade	16,0	FK
Impeller weight	127,0 g	

2 Mechanics

2.1 General

Width	127,0 mm	
Height	127,0 mm	
Depth	38,0 mm	
Diameter	0,0 mm	
Weight	0,310 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	wire outlet corner: 10 Ncm remaining corners: 60 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	


2.2 Motor

Type of motor	Electronically commutated external rotor	
Diameter of the motor	43,0 mm	
Height of the motor	10,5 mm	
Number of phases	1	
Number of windings	1	
Operating mode	Continuous duty	
Insulation material class	E	



2.3 Connections

Electrical connection	Wires	
Length of lead wire	500 mm	
Tolerance		+/- 10,0 mm
Length of tube		
Tolerance		
Wire gauge (AWG)	22	
Insulation diameter	1,70 mm	
Plug	see drawing	
Contact	see drawing	

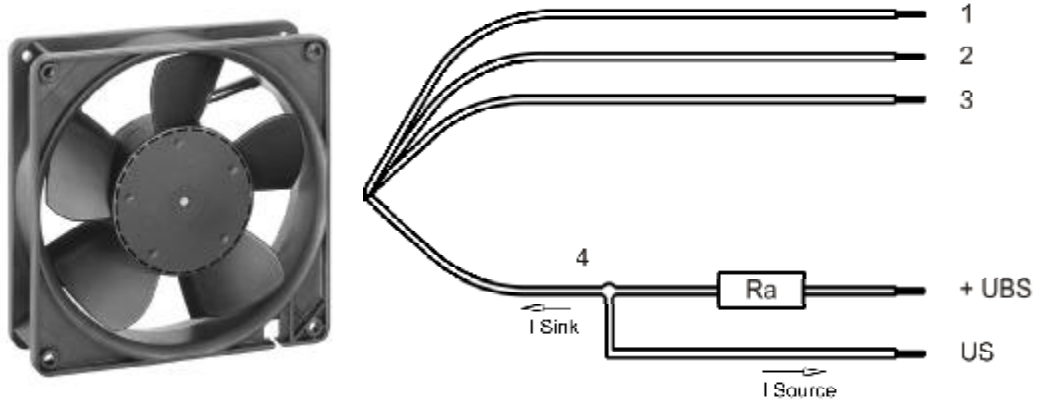

	Colour	Operation
Wire 1	red	+ UB
Wire 2	black	- GND
Wire 3	yellow	PWM
Wire 4	blue	Tacho

The auxiliary shown on the schematic diagram which are required for the intended use are not part of our delivery.


3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	PWM
---------------	-----

Features

Input type	Open collector	
PWM - Frequency		15 kHz - 27 kHz Typical: 25 kHz

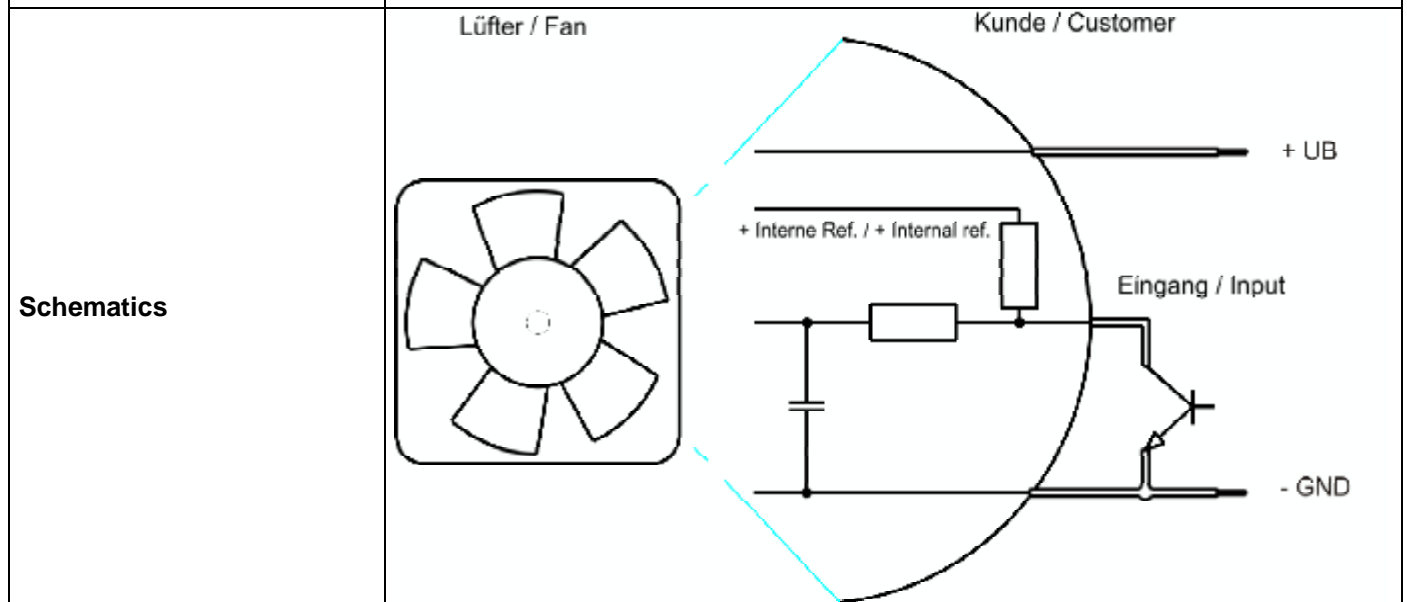

Transistor requirements:

VCEmax. >12V; Isink max. >5mA; VCEsat <0,15V



3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area there may not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.5)
 I: corresp. to arithm. mean current value

Name	Condition
PWM 0001	PWM: 100 %; f: 25 kHz

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	28,0 V		56,0 V
Nominal voltage	$\Delta p = 0$	U_N		48,0 V	
Power consumption	$\Delta p = 0$	P	7,8 W	21,0 W	21,5 W
Tolerance	PWM 0001		+/- 15,0 %	+/- 15,0 %	+/- 15,0 %
Current consumption	$\Delta p = 0$	I	280 mA	440 mA*)	385 mA
Tolerance	PWM 0001		+/- 15,0 %	+/- 15,0 %	+/- 15,0 %
Speed	$\Delta p = 0$	n	3.650 1/min	4.900 1/min*)	4.900 1/min
Tolerance	PWM 0001		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %
Starting current consumption				1.650 mA	
Inrush current				60.000 mA	
Typical current curve (A = least and B = largest current curve in a revolution) A and B = neighboring current curves MPE 891001				1,0 <= A B <= 1,3	

The internal electrolytic capacitor has no resistor or inrush current limitation, essentially the type and length of the connecting cable is limiting the Inrush current.

Name	Condition
PWM 0003	PWM: 50 %; f: 25 kHz

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	28,0 V		56,0 V
Nominal voltage	$\Delta p = 0$	U_N		48,0 V	
Power consumption	$\Delta p = 0$	P	4,6 W	6,0 W	6,0 W
Tolerance	PWM 0003		+/- 15,0 %	+/- 15,0 %	+/- 15,0 %
Current consumption	$\Delta p = 0$	I	165 mA	125 mA*)	107 mA
Tolerance	PWM 0002		+/- 15,0 %	+/- 15,0 %	+/- 15,0 %
Speed	$\Delta p = 0$	n	2.900 1/min	2.900 1/min*)	2.900 1/min
Tolerance	PWM 0002		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %

Name	Condition
PWM 0004	PWM: 0 %; f: 25 kHz




Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	28,0 V		56,0 V
Nominal voltage	$\Delta p = 0$	U_N		48,0 V	
Power consumption	$\Delta p = 0$	P	< 1 W	< 1 W	< 1 W
Tolerance	PWM 0004				
Current consumption	$\Delta p = 0$	I	< 10 mA	< 10 mA*)	< 10 mA
Tolerance	PWM 0003				
Speed	$\Delta p = 0$	n	0 1/min	0 1/min*)	0 1/min
Tolerance	PWM 0003				

*) Attention: Marked values are "FK" features

3.3 Operating Data - Electrical Interface -Output


Tacho type	/2 (Open collector)
------------	---------------------

Signal-Ausgangsspannung / Signal output voltage

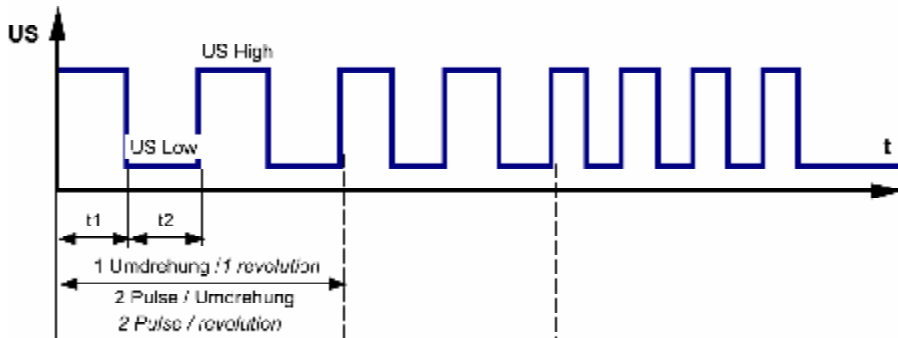

$$R_a = \frac{U_{BS} - U_{S \text{ Low}}}{I_{\text{Sink}}}$$

Lüfter-Drehzahl / Fan speed

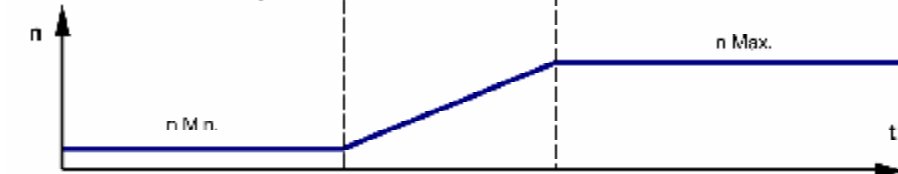




Features	Note	Values
Tacho operating voltage (UBS)		$\leq 60 \text{ V}$
Tacho signal Low *)	I sink: 2 mA	$\leq 0,4 \text{ V}$
Tacho signal High *)	I source: 0 mA	60 V
Maximum sink current		$\leq 20 \text{ mA}$
External resistor	External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency *)	$(2 \times n) / 60$	163 Hz
Tacho isolated from motor	No	
Slew rate of the tacho output voltage		$\Rightarrow 0,5 \text{ V/us}$

*) Attention: Marked values are "FK" features

Alarm type	None
------------	------

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Polarity protected diode	A
Max. residual current at Un	IF $\leq 10 \text{ mA}$	
Locked rotor protection	Electronically restart	A
Locked rotor current at Un	approx. 1.200 mA	
Clock signal t3/t4 at locked rotor	Typical: 0,5 s / 5,0 s t3: 0,4 s... 0,6 s t4: 4,8 s... 5,2 s	

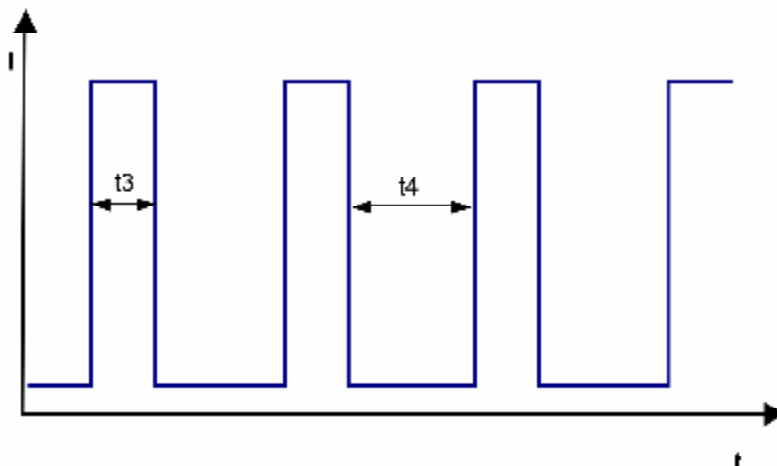



3.5 Aerodynamic

Measurement conditions: Measured with a double chamber intake rig acc. to DIN 24163 Part 3.
Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;
In the intake and outlet area there may not be any solid obstruction within 0,5 m.

a.) Operation condition:

4.900 1/min at free air flow	PWM 100 %; f: 25 kHz		
------------------------------	----------------------	--	--

Max. free-air flow ($\Delta p = 0 / \dot{V} = \max.$)	338,0 m ³ /h	FK
Max. static pressure ($\Delta p = \max. / \dot{V} = 0$)	225 Pa	FK

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
Measured in a semianchoic chamber with a background noise level of L_p(A) < 5 dB(A)
For further measurement conditions see section 3.5

a.) Operation condition:

4.900 1/min at free air flow	PWM 100 %; f: 25 kHz	PWM min.:	PWM max.:
------------------------------	----------------------	-----------	-----------

Optimal operating point	265,0 m ³ /h @ 72 Pa	
Sound power level at the optimal operating point	6,6 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	58,0 dB(A)	

4 Environment

4.1 General*)

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic requirements

*) Permitted application area:
The product is for the use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoid.



4.3 Mechanical requirements

not specified

4.4 EMC

not specified

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	A
Insulation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Air and leakage distances	1,0 mm / 1,5 mm	
Protection class	III	

5.2 Approval Tests

CE	No
UL	Yes / UL507, Electric Fans
VDE	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment - Part 1 Safety - Connection to a SELV circuit.
CSA	Yes / C22.2 No. 113-M1984 Fans and Ventilators
CCC	No

The approval tests are observed to:

Maximal permitted operating voltage (see section 3.1) and max. permitted ambient temperature TU max.



6 Reliability

6.1 General

Life expectancy L10 at TU = 20 °C		
Life expectancy L10 at TU = 40 °C	45.000 hrs	
Life expectancy L10 at TU = 60 °C		
Life expectancy L10 at TU max.	25.000 hrs	
Life expectancy L15 at TU = 45 °C		
Life expectancy L10 Delta (40 °C)	90.000 hrs	

6.2 Additional Data

not specified