

**Product Data Sheet**

**9295420004**  
VWS0148XULDS  
6314/2TDHP

**ebmpapst**

The engineer's choice



6314/2TDHP

INDEX

**1 General ..... 3**

**2 Mechanics ..... 3**

2.1 General..... 3

2.2 Connections..... 3

**3 Operating Data ..... 4**

3.1 Electrical Interface - Input..... 4

3.2 Electrical Operating Data ..... 5

3.3 Electrical Interface - Output..... 6

3.4 Electrical Features ..... 7

3.5 Aerodynamics ..... 9

3.6 Sound Data..... 10

**4 Environment..... 10**

4.1 General..... 10

4.2 Climatic Requirements ..... 10

**5 Safety..... 11**

5.1 Electrical Safety ..... 11

5.2 Approval Tests ..... 11

**6 Reliability..... 11**

6.1 General..... 11

1 General

|                                     |                        |  |
|-------------------------------------|------------------------|--|
| Fan type                            | Fan                    |  |
| Rotating direction looking at rotor | Counterclockwise       |  |
| Airflow direction                   | Air outlet over struts |  |
| Bearing system                      | Ball bearing           |  |
| Mounting position - shaft           | Any                    |  |


2 Mechanics

2.1 General

|   |   |  |
|---|---|--|
| Depth   | 51,0 mm   |  |
| Diameter  | 172,0 mm  |  |
| Mass  | 0,875 kg  |  |
| Housing material                                      | Metal   |  |
| Impeller material                                     | Plastic   |  |
| Max. torque when mounted across both mounting flanges | Wire outlet corner: 600 Ncm<br>Remaining corners: 600 Ncm               |  |
| Screw size  | ISO 4762 - M4 degreased, without an additional brace and without washer |  |

2.2 Connections

|                       |             |  |
|-----------------------|-------------|--|
| Electrical connection | Wires       |  |
| Lead wire length      | L = 365 mm  |  |
| Tolerance             | + - 10,0 mm |  |
| Tube length           | S = 10 mm   |  |
| Tolerance             | + - 2,0 mm  |  |

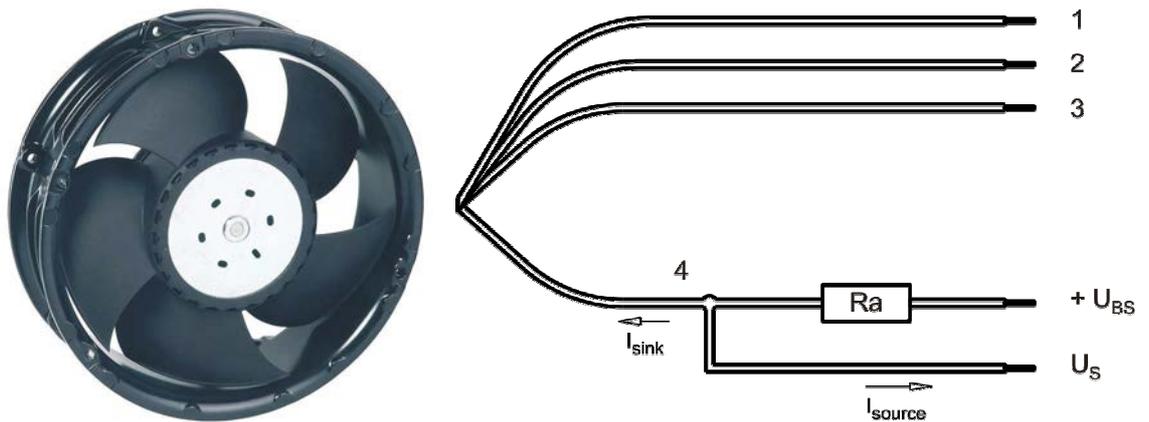

| Wire | Color  | Operation | Wire size | Insulation diameter |
|------|--------|-----------|-----------|---------------------|
| 1    | red    | + UB      | AWG 22    | 1,7 mm              |
| 2    | blue   | - GND     | AWG 22    | 1,7 mm              |
| 3    | violet | PWM       | AWG 22    | 1,7 mm              |
| 4    | white  | Tacho     | AWG 22    | 1,7 mm              |

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.



3 Operating Data

3.1 Electrical Interface - Input

|               |     |
|---------------|-----|
| Control input | PWM |
|---------------|-----|

Features

|                       |                |                |
|-----------------------|----------------|----------------|
| Input type            | Open collector |                |
| PWM - Frequency       |                | typical: 2 kHz |
| Input frequency range |                | 1 kHz - 20 kHz |

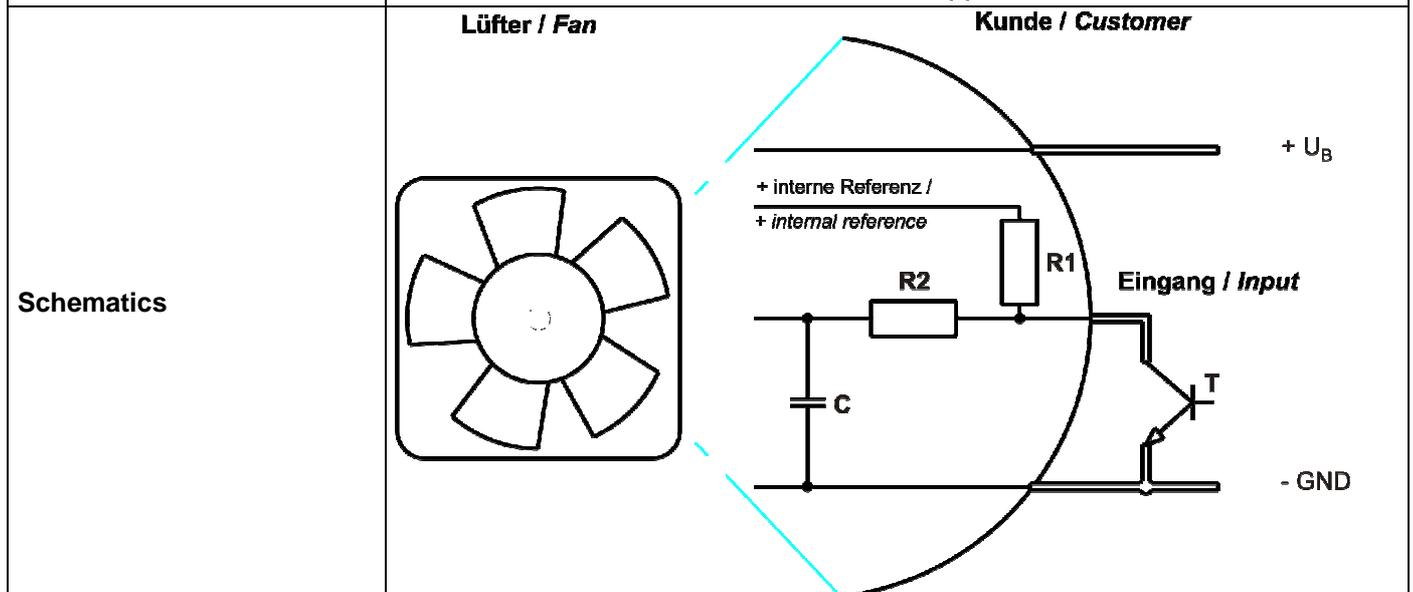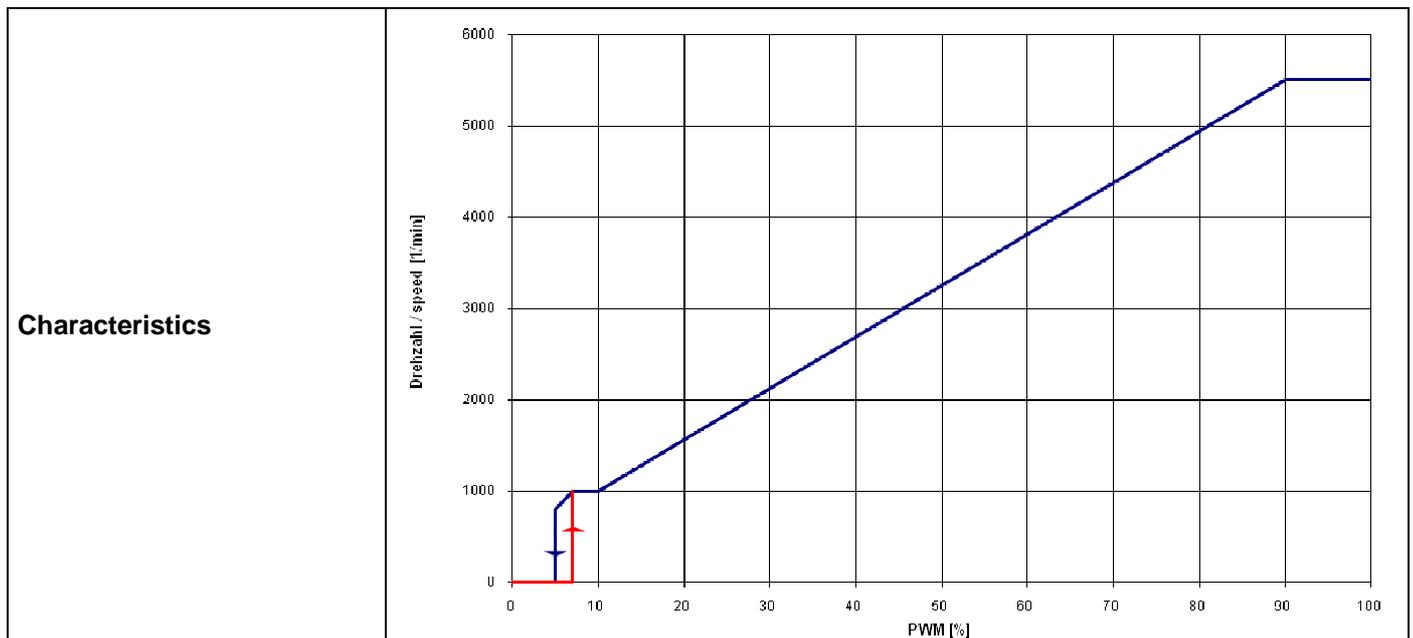

**Information to the curve:**

0 % - 7% PWM: 0 1/min  
7 % PWM: 1.000 1/min (Fan on, comming from 0% PWM)

|                  |   |
|------------------|---|
| 7 % - 10% PWM:   | 1.000 1/min (corresponding to min. speed)             |
| 10 % - 90% PWM:  | linear increasing curve                               |
| 90 % - 100% PWM: | 5.500 1/min (corresponding to max. speed)             |
| 7 % - 5 % PWM:   | linear decreasing curve (comming from 100% PWM)       |
| 5 % PWM:         | 800 1/min or 0 1/min (Fan off, comming from 100% PWM) |

### 3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)  
I: corresp. to arithm. mean current value


| Name     | Condition           |
|----------|---------------------|
| PWM 0001 | PWM: 95 %; f: 2 kHz |

**100% PWM or broken lead wire (open control input)**

| Features            | Condition      | Symbol         | Values      |             |             |
|---------------------|----------------|----------------|-------------|-------------|-------------|
| Voltage range       |                | U              | 16 V        |             | 36 V        |
| Nominal voltage     |                | U <sub>N</sub> |             | 24 V        |             |
| Power consumption   | $\Delta p = 0$ | P              | 20,5 W      | 41 W        | 38 W        |
| Tolerance           | PWM 0010       |                | +/- 10 %    | +/- 10 %    | +/- 10 %    |
| Current consumption | $\Delta p = 0$ | I              | 1.280 mA    | 1.700 mA    | 1.055 mA    |
| Tolerance           | PWM 0010       |                | +/- 10 %    | +/- 10 %    | +/- 10 %    |
| Speed               | $\Delta p = 0$ | n              | 4.500 1/min | 5.500 1/min | 5.500 1/min |
| Tolerance           | PWM 0010       |                | +/- 7,5 %   | +/- 5 %     | +/- 5 %     |


3.3 Electrical Interface - Output

|            |                     |
|------------|---------------------|
| Tacho type | /2 (open collector) |
|------------|---------------------|

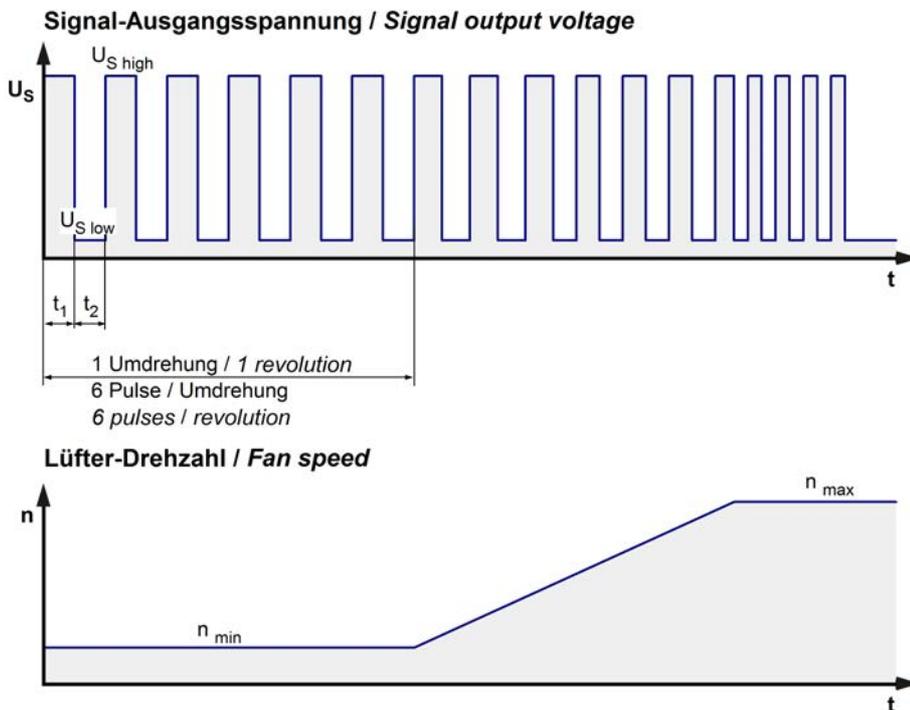

$$R_a = \frac{U_{BS} - U_{S\ low}}{I_{sink}}$$

Lüfter / Fan      Kunde / Customer

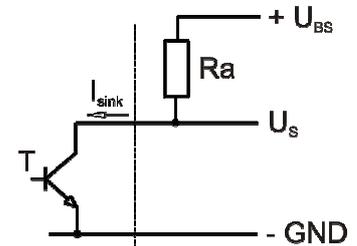

| Features                  | Note   | Values                     |
|---------------------------|--|----------------------------|
| Tacho operating voltage   | $U_{BS}$   | $\leq 60,0\ V$             |
| Tacho signal Low          | $U_{S\ low}$   | $\leq 0,4\ V$              |
| Tacho signal High         | $U_{S\ high}$  | $\leq 60,0\ V$             |
| Maximum sink current      | $I_{sink}$   | $\leq 20\ mA$              |
| External resistor         | External resistor $R_a$ from $U_{BS}$ to $U_S$ required. All voltages measured to GND. |                            |
| Tacho frequency           | $(6 \times n) / 60$  | 550 Hz @ 5.500 1/min       |
| Tacho isolated from motor | No   |                            |
| Slew rate                 |  | $\Rightarrow 0,5\ V/\mu s$ |

$n$  = revolutions per minute (1/min)


**Please note:**

At zero speed the tacho signal is at a static HIGH. It will be also HIGH when the fan is still spinning, but the speed control signal is set to zero speed already.  
The tacho signal is only activated after the start-up is completed.

3.4 Electrical Features


|   |   |  |
|---|---|--|
| Electronic function                               | Speed-Controlled  |  |
| Reversed polarity protection                      | P-CH FET  |  |
| Max. residual current at $U_N$                    | $I_F \leq 5 \text{ mA}$   |  |
| Locked rotor protection                           | Auto restart  |  |
| Locked rotor current at $U_N$                     | $I_{block}$   |  |
| Clock signal at locked rotor<br>Extended Downtime | $t_3 / t_4$ typical: 2,7 s / 10,0 s<br>$t_5$ : 40 s after 4 start-up tests  |  |
| Internal fuse                                     | Littelfuse NANO2 > Very Fast-Acting > 451/453 Series<br>7A / 125V (Art.No.: 0451007.MRL)                              |  |
| Voltage control *)                                | Fan turns on at $U_B > 14 \text{ V}$ or $< 40 \text{ V}$<br>Fan turns off at $U_B < 13 \text{ V}$ or $> 42 \text{ V}$ |  |

\*) This fan has an undervoltage and overvoltage control circuit integrated which turns the motor off if the voltage is out of range.

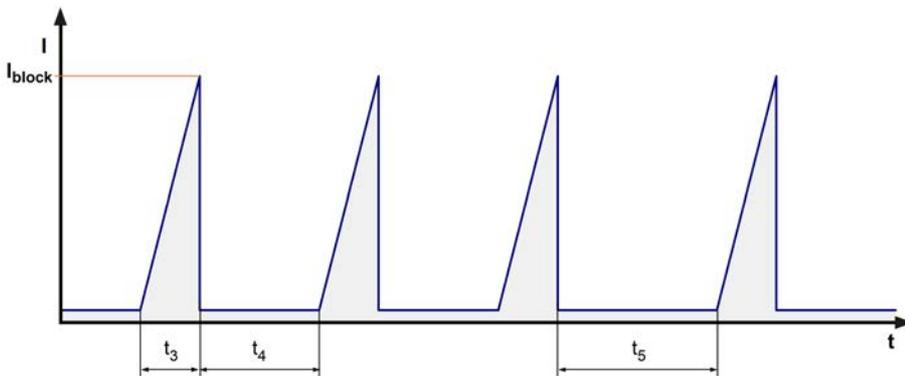


First locked rotor off time is reduced to 3 seconds.


This fan has a startup delay of 2 seconds after applying supply voltage.

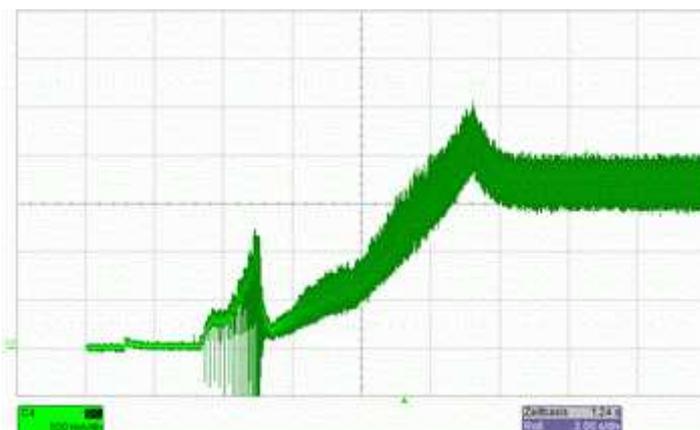

Start-up current @ 24 V (I = 500mA/div ; t = 2s/div)

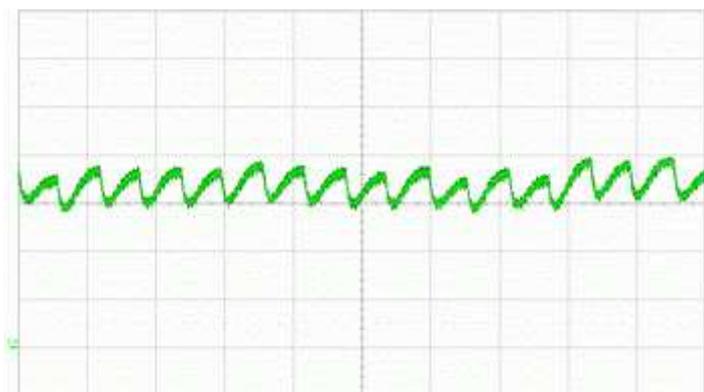

Running current @ 24 V (I = 500mA/div ; t = 1ms/div)

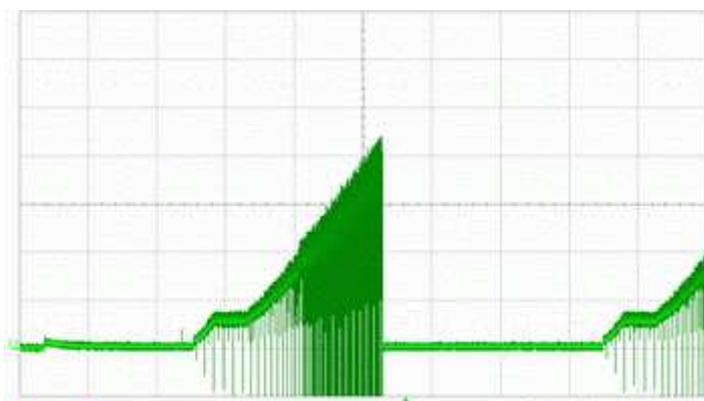

Locked rotor current @ 24 V (I = 0,5A/div ; t = 1s/div)


### 3.5 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.  
The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

|                              |                    |  |  |
|------------------------------|--------------------|--|--|
| 5.500 1/min at free air flow | PWM 95 %; f: 2 kHz |  |  |
|------------------------------|--------------------|--|--|

|   |                       |  |
|---|-----------------------|--|
| Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )   | 600 m <sup>3</sup> /h |  |
| Max. static pressure ( $\Delta p = \text{max.} / \dot{V} = 0$ ) | 655 Pa                |  |

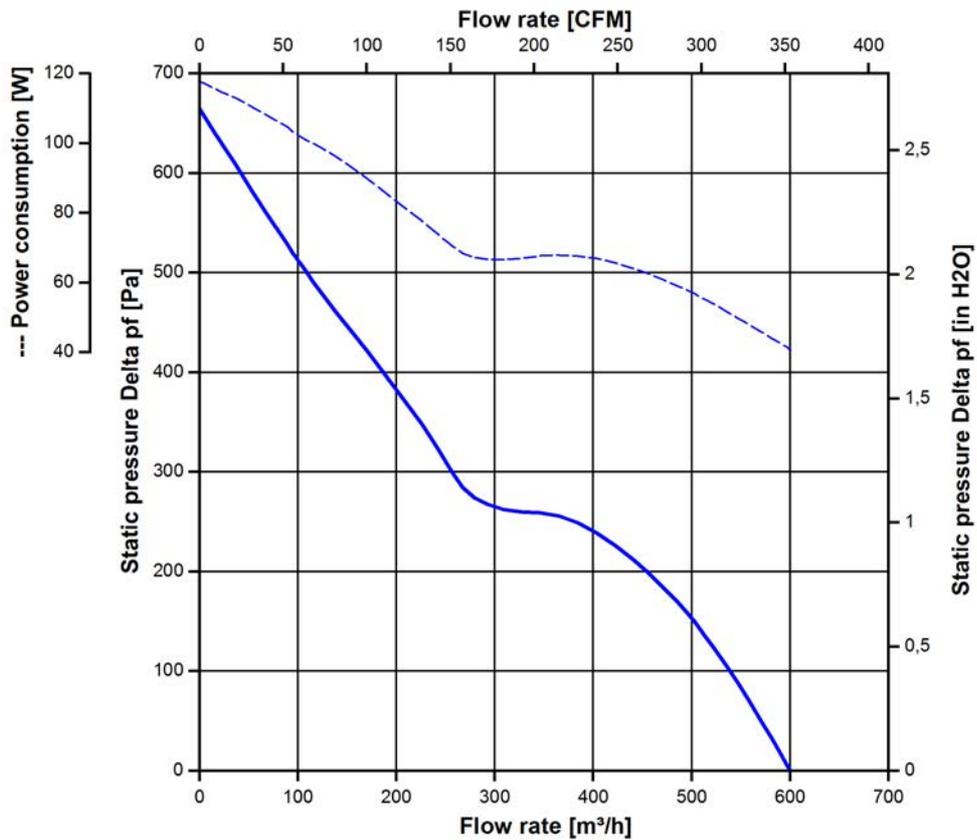

### 3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

|                              |                    |  |  |
|------------------------------|--------------------|--|--|
| 5.500 1/min at free air flow | PWM 95 %; f: 2 kHz |  |  |
|------------------------------|--------------------|--|--|

|   |                                |  |  |
|---|--------------------------------|--|--|
| Optimal operating point   | 505 m <sup>3</sup> /h @ 123 Pa |  |  |
| Sound power level at the optimal operating point                | 7,2 bel(A)                     |  |  |
| Sound pressure level at free air flow, measured in rubber bands | 63,0 dB(A)                     |  |  |

## 4 Environment

### 4.1 General

|  |        |  |  |
|--|--------|--|--|
| Min. permitted ambient temperature TU min. | -20 °C |  |  |
| Max. permitted ambient temperature TU max. | 75 °C  |  |  |
| Min. permitted storage temperature TL min. | -40 °C |  |  |
| Max. permitted storage temperature TL max. | 80 °C  |  |  |

### 4.2 Climatic Requirements

|                       |   |  |  |
|-----------------------|---|--|--|
| Humidity requirements | humid heat, constant; according to DIN EN 60068-2-78, 14 days |  |  |
| Water exposure        | None  |  |  |
| Dust requirements     | None  |  |  |
| Salt fog requirements | None  |  |  |

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

Please require severity levels and specification parameters from the responsible development departments.

## 5 Safety

### 5.1 Electrical Safety

|  |                  |  |
|--|------------------|--|
| Dielectric strength<br>DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700)<br>A.) Type test<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C.<br>No arcing or breakdown is allowed!<br>All connections together to ground. | 500 VAC / 1 Min. |  |
| B.) Routine test<br>Measuring conditions: At indoor climate.<br>No arcing or breakdown is allowed!<br>All connections together to ground.  | 850 VDC / 1 Sec. |  |
| Isolation resistance<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.   | RI > 10 MOhm     |  |
| Clearance / creepage distance  | 1,0 mm / 1,2 mm  |  |
| Protection class   | III              |  |

### 5.2 Approval Tests

|     |   |   |
|-----|---|---|
| CE  | EC Declaration of Conformity  | No  |
| EAC | Eurasian Conformity   | Yes   |
| UL  | Underwriters Laboratories   | Yes / UL507, Electric Fans E38324   |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Canadian Standards Association                                      | Yes / C22.2 No. 113 Fans and Ventilators                                      |
| CCC | China Compulsory Certification                                      | Not applicable  |

The approval tests are observed to:

U approval max.:36,0 V @ TU approval max.: 70,0 °C

## 6 Reliability

### 6.1 General

|  |            |  |
|--|------------|--|
| Life expectancy L10 at TU = 40 °C                  | 70.000 h   |  |
| Life expectancy L10 at TU max.                     | 35.000 h   |  |
| Life expectancy L10 acc. to IPC 9591 at TU = 40 °C | 117. 500 h |  |

