

8300100027  
VBS0190RSLBS

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Item	8300100027	
Motor	E06001-10 (M3G060-BA)	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	3250
Power consumption	W	85
Current draw	A	0.7
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



8300100027  
VBS0190RSLBS

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Technical description

Weight	0.96 kg
Size	190 mm
Motor size	60
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"><li>- Output 10 VDC, max. 1.1 mA</li><li>- Locked-rotor detection</li><li>- Tach output</li><li>- Speed control</li><li>- Power limiter</li><li>- Motor current limitation</li><li>- Soft start</li><li>- Control input 0-10 VDC / PWM</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Overvoltage detection</li><li>- Thermal overload protection for electronics/motor</li><li>- Line undervoltage detection</li></ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.




8300100027  
VBS0190RSLBS

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Product drawing

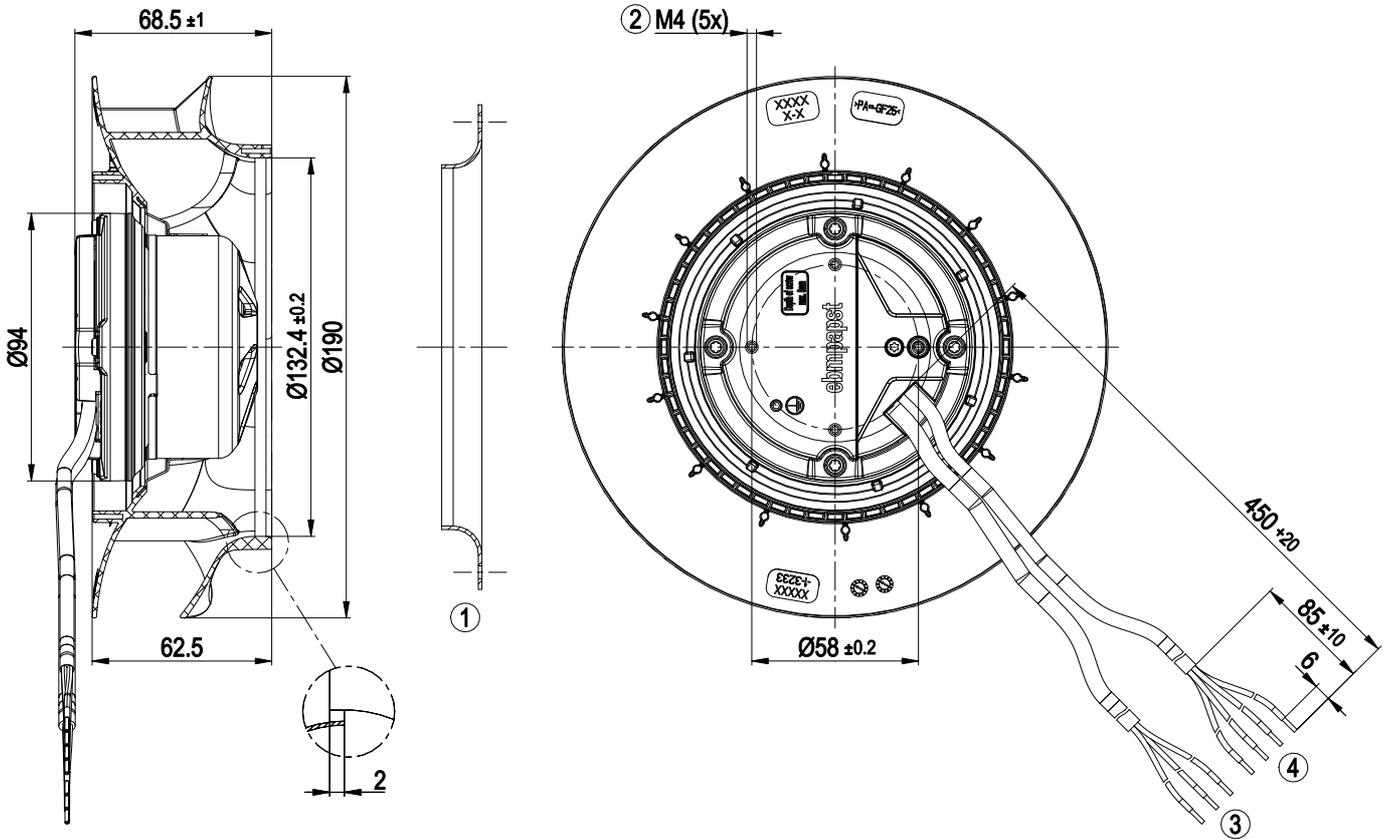

1	Accessory part: inlet ring 09576-2-4013 not included in scope of delivery
2	Max. clearance for screw 5 mm
3	Supply line (PWR) PVC AWG20 3x splice
4	Control wire (CTRL) PVC AWG22 4x splice




8300100027  
VBS0190RSLBS

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Accessory part

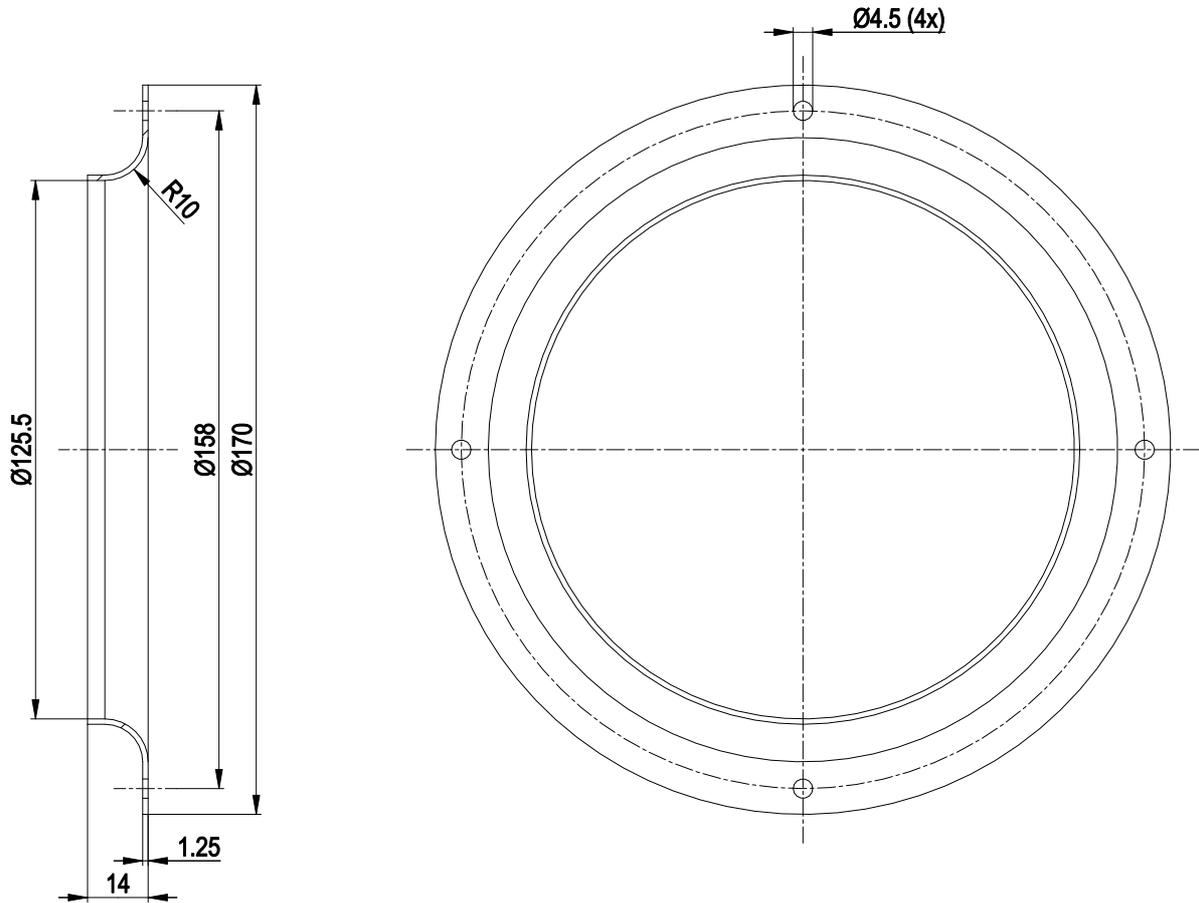


Inlet ring 09576-2-4013



# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Connection diagram

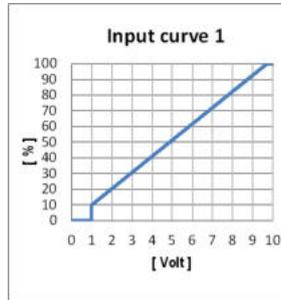

No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=1.1 mA Not short-circuit-proof, power supply for external devices, SELV



## Terminal/plug assignment


	configurable IO mode	electrical specification					
IO1	◦ Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV					
	◦ Ain1 0-10 V/PWM: analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{\text{PWM}} = 1\text{k}..10\text{kHz}$ , SELV					
IO2	◦ Tach out (open collector)	Umax=50 VDC, Imax=10 mA, SELV					
	◦ Diagnostics out (open collector)	Umax=50 VDC, Imax=10 mA, SELV					
	◦ Alarm out (open collector)	Umax=50 VDC, Imax=10 mA, SELV					
	◦ Open collector	Umax=50 VDC, Imax=10 mA, SELV					
Vout	Voltage output	Voltage 10 VDC, SELV					
			source: set value				
			switch: parameter set: #1 / #2				
			switch: direction of rotation: cw / ccw				
			switch: enable/disable input				
			configurable function				
			signal: tach out				
			signal: diagnostics out				
			signal: alarm out				
			signal: run monitoring				
			signal: status				
			signal: configurable function				

### Basic (B4) Factory configuration option upon request

- Factory configuration option



## Curves: Air performance 50 Hz

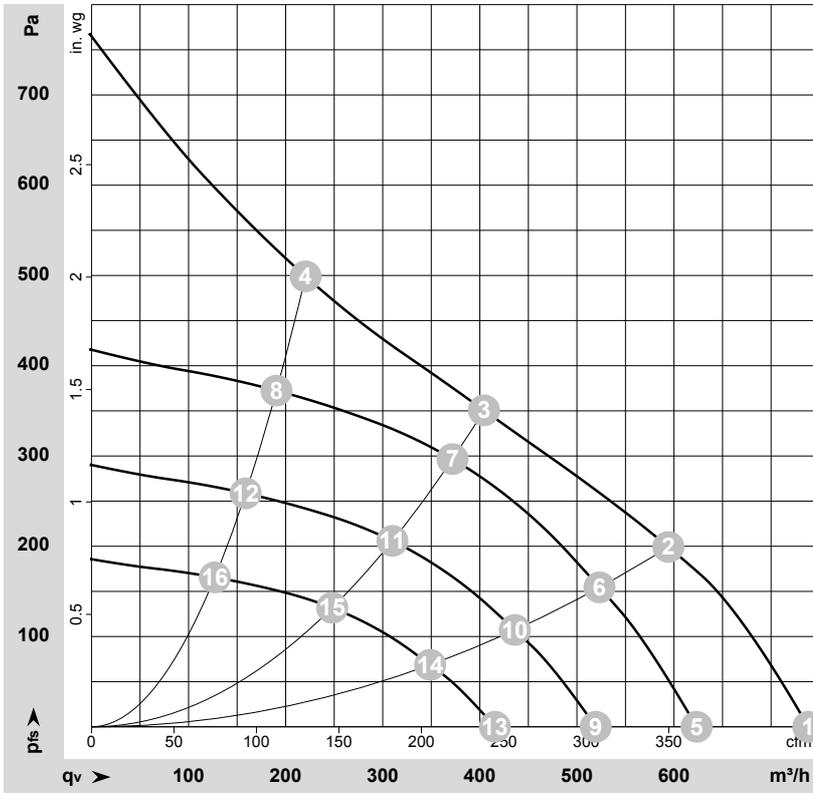

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-211932-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	1~	230	50	3555	85	0.70	69	76	740	0	435	0.00
2	1~	230	50	3410	85	0.70	63	71	595	200	350	0.80
3	1~	230	50	3250	85	0.70	61	69	405	350	240	1.41
4	1~	230	50	3465	85	0.70	65	74	220	500	130	2.01
5	1~	230	50	3000	52	0.42	64	72	625	0	365	0.00
6	1~	230	50	3000	61	0.49	60	67	525	155	310	0.62
7	1~	230	50	3000	69	0.56	59	67	370	297	220	1.19
8	1~	230	50	3000	58	0.47	62	70	190	373	110	1.50
9	1~	230	50	2500	30	0.24	60	67	520	0	305	0.00
10	1~	230	50	2500	35	0.28	55	63	435	107	255	0.43
11	1~	230	50	2500	40	0.32	54	62	310	206	180	0.83
12	1~	230	50	2500	33	0.27	57	65	160	259	95	1.04
13	1~	230	50	2000	16	0.13	54	62	415	0	245	0.00
14	1~	230	50	2000	18	0.15	50	57	350	69	205	0.28
15	1~	230	50	2000	20	0.17	49	56	250	132	145	0.53
16	1~	230	50	2000	17	0.14	51	60	125	166	75	0.67

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

