

8300100319

VBH0500CTRNS

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100319	
Motor	E11233-80	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2070
Power consumption	W	2500
Current draw	A	3.9
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	73.3	55.6	09 Power consumption P_{ed}	kW	2.43
02 Measurement category		A		09 Air flow q_v	m ³ /h	8870
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	688
04 Efficiency grade N		79.7	62	10 Speed (rpm) n	min ⁻¹	2065
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

LU-218041

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



8300100319

VBH0500CTRNS

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Technical description

Weight	30.52 kg
Size	500 mm
Motor size	112
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Inlet nozzle material	ABS plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection - Vibration sensor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection



8300100319
VBH0500CTRNS

EC centrifugal module - RadiPac

backward-curved, single-intake
with support bracket

Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1



8300100319


VBH0500CTRNS

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Product drawing

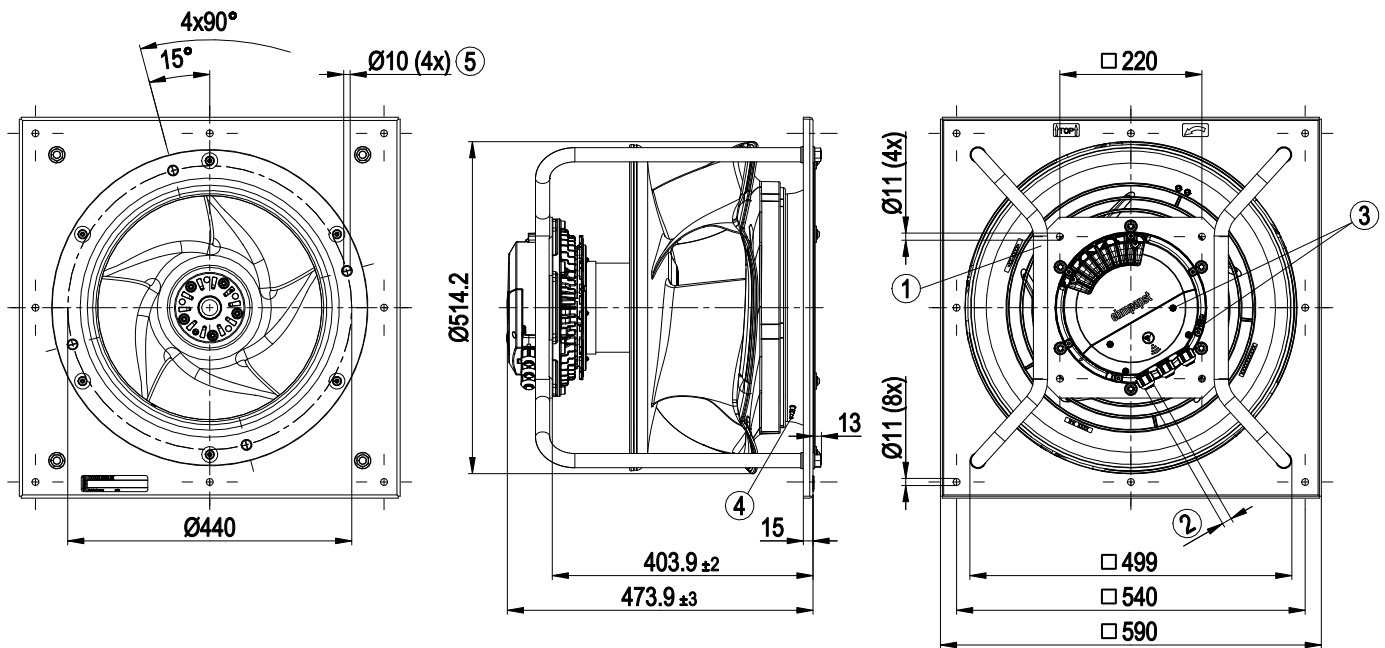

1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
3	Tightening torque 1.5 ± 0.2 Nm
4	Inlet ring with pressure tap (k-factor: 290)
5	Fastening holes for FlowGrid 35505-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required




EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Connection diagram

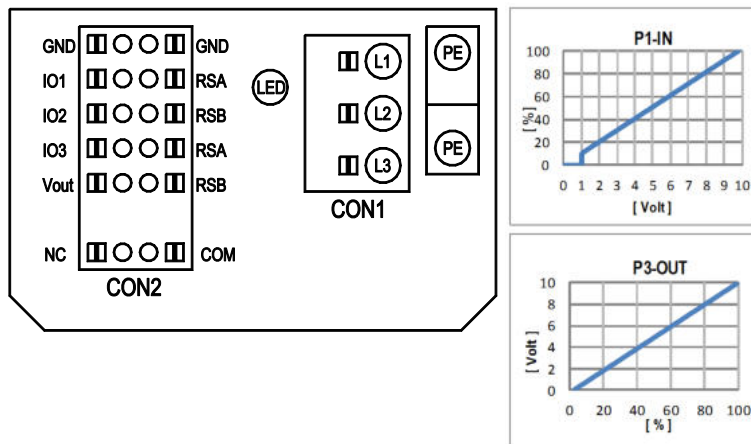

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Actual speed Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

8300100319

VBH0500CTRNS

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Terminal/plug assignment

configurable option		For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3		configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	electrical specification	configurable IO mode	CON2	configurable IO mode																																																					
									configurable IO mode																																																					
IO1	○	Din1 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC Ri = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz, SELV U _{max} = 50VDC, I _{max} = 20mA, SELV U _{max} = 50VDC, I _{max} = 20mA, SELV	D158 [0]	○	switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]																																										
																					source: set value	D101 [...] source: sensor value	D147 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) / cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]																					
																																										source: set value	D101 [...] source: sensor value	D147 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) / cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]
IO2	○	Din2 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC Ri = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz, SELV Ri = 125R, characteristic curve parameterizable, SELV	D159 [0]	○	switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]																																										
																					source: set value	D101 [...] source: sensor value	D147 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) / cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]																					
																																										source: set value	D101 [...] source: sensor value	D147 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) / cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]
IO3	○	Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV 40Hz - 10KHz, characteristics parameterizable active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	D15A [0]	○	switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]																																										
																					source: set value	D101 [...] source: sensor value	D147 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) / cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]																					
																																										source: set value	D101 [...] source: sensor value	D147 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) / cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]
RSA RSB	○	Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV 40Hz - 10KHz, characteristics parameterizable active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	D15A [0]	○	switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]																																										
																					source: set value	D101 [...] source: sensor value	D147 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) / cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]																					
																																										source: set value	D101 [...] source: sensor value	D147 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) / cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]
Vout	○	Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV 40Hz - 10KHz, characteristics parameterizable active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	D15A [0]	○	switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]																																										
																					source: set value	D101 [...] source: sensor value	D147 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) / cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]																					
																																										source: set value	D101 [...] source: sensor value	D147 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) / cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	D130 [0]	signal: actual speed	D130 [1]	signal: system modulation level %	D130 [2]	signal: remote control output 0-10V	D130 [5]	D00C [1]	pulse output for auto-addressing	D130 [4]

○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3



8300100319


VBH0500CTRNS

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Curves: Air performance 50 Hz

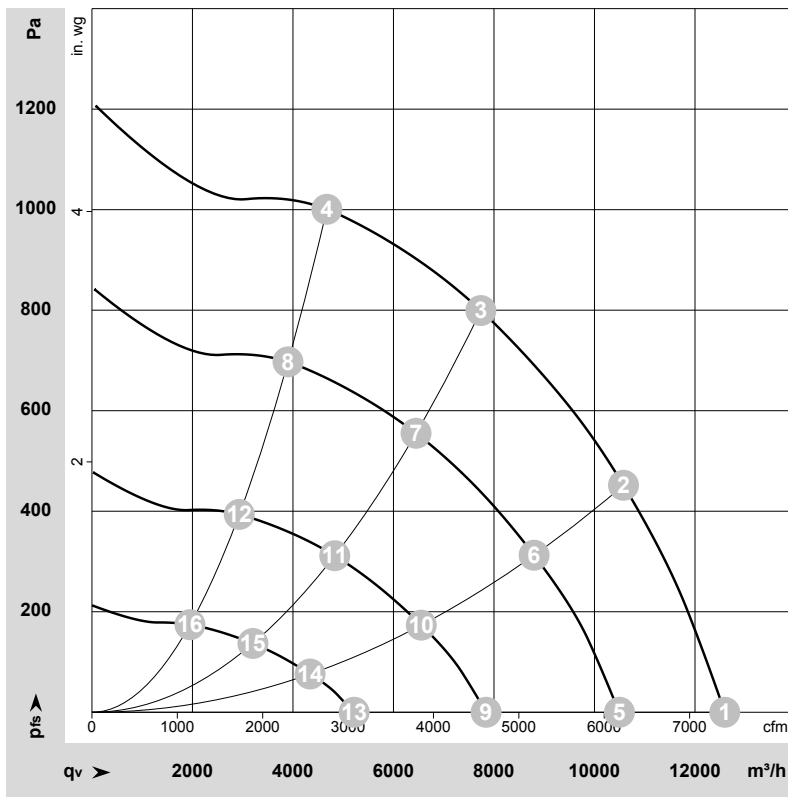

$$\rho = 1.173 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-218041-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	2070	1604	2.56	80	88	92	12595	0	7410	0.00
2	3~	400	50	2070	2201	3.43	75	83	86	10575	450	6225	1.81
3	3~	400	50	2070	2500	3.90	70	78	82	7740	800	4555	3.21
4	3~	400	50	2070	2280	3.55	74	81	86	4675	1000	2750	4.01
5	3~	400	50	1720	952	1.64	76	84	88	10495	0	6180	0.00
6	3~	400	50	1725	1284	2.10	71	79	82	8800	313	5180	1.26
7	3~	400	50	1725	1457	2.35	66	73	78	6450	556	3795	2.23
8	3~	400	50	1725	1342	2.19	68	75	81	3900	698	2295	2.80
9	3~	400	50	1290	440	0.96	69	78	81	7845	0	4615	0.00
10	3~	400	50	1290	577	1.15	64	72	76	6555	174	3860	0.70
11	3~	400	50	1290	645	1.24	58	66	71	4830	312	2845	1.25
12	3~	400	50	1290	601	1.18	60	68	73	2930	394	1725	1.58
13	3~	400	50	860	162	0.50	60	69	73	5220	0	3070	0.00
14	3~	400	50	860	201	0.57	53	63	67	4340	76	2555	0.31
15	3~	400	50	860	220	0.61	48	56	61	3205	137	1885	0.55
16	3~	400	50	860	207	0.58	49	55	60	1950	174	1150	0.70

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

