

8300100455
VBS0280CSLFS

EC centrifugal fan - RadiPac

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-------------------|------------|
| Item | 8300100455 | |
| Motor | E06001-30 | |
| Phase | | 1~ |
| Nominal voltage | VAC | 230 |
| Nominal voltage range | VAC | 200 .. 240 |
| Frequency | Hz | 50/60 |
| Method of obtaining data | | ml |
| Status | | prelim. |
| Speed (rpm) | min ⁻¹ | 1675 |
| Power consumption | W | 85 |
| Current draw | A | 0.7 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 60 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

8300100455
VBS0280CSLFS

EC centrifugal fan - RadiPac

backward-curved, single-intake

Technical description


| | |
|--|---|
| Size | 280 mm |
| Motor size | 60 |
| Rotor surface | Thick-film passivated |
| Electronics housing material | Die-cast aluminum |
| Impeller material | PP plastic |
| Number of blades | 5 |
| Direction of rotation | Clockwise, viewed toward rotor |
| Degree of protection | IP54 |
| Insulation class | "B" |
| Moisture (F) / Environmental (H) protection class | H1 |
| Max. permitted ambient temp. for motor (transport/storage) | +80 °C |
| Min. permitted ambient temp. for motor (transport/storage) | -40 °C |
| Installation position | Any |
| Condensation drainage holes | None, open rotor |
| Mode | S1 |
| Motor bearing | Ball bearing |
| Technical features | <ul style="list-style-type: none">- Output 10 VDC, max. 1.1 mA- Locked-rotor detection- Tach output- Speed control- Power limiter- Motor current limitation- Soft start- Control input 0-10 VDC / PWM- Control interface with SELV potential safely disconnected from the mains- Overvoltage detection- Thermal overload protection for electronics/motor- Line undervoltage detection |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA |
| Motor protection | Electronic motor protection |
| With cable | Variable |
| Protection class assignment | I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection. |
| Conformity with standards | EN 60034-1; EN 60204-1; EN 60335-1; CE; UKCA |
| Comment on CE | Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W. |
| Approval | CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1 |

8300100455
VBS0280CSLFS

EC centrifugal fan - RadiPac


backward-curved, single-intake

Product drawing

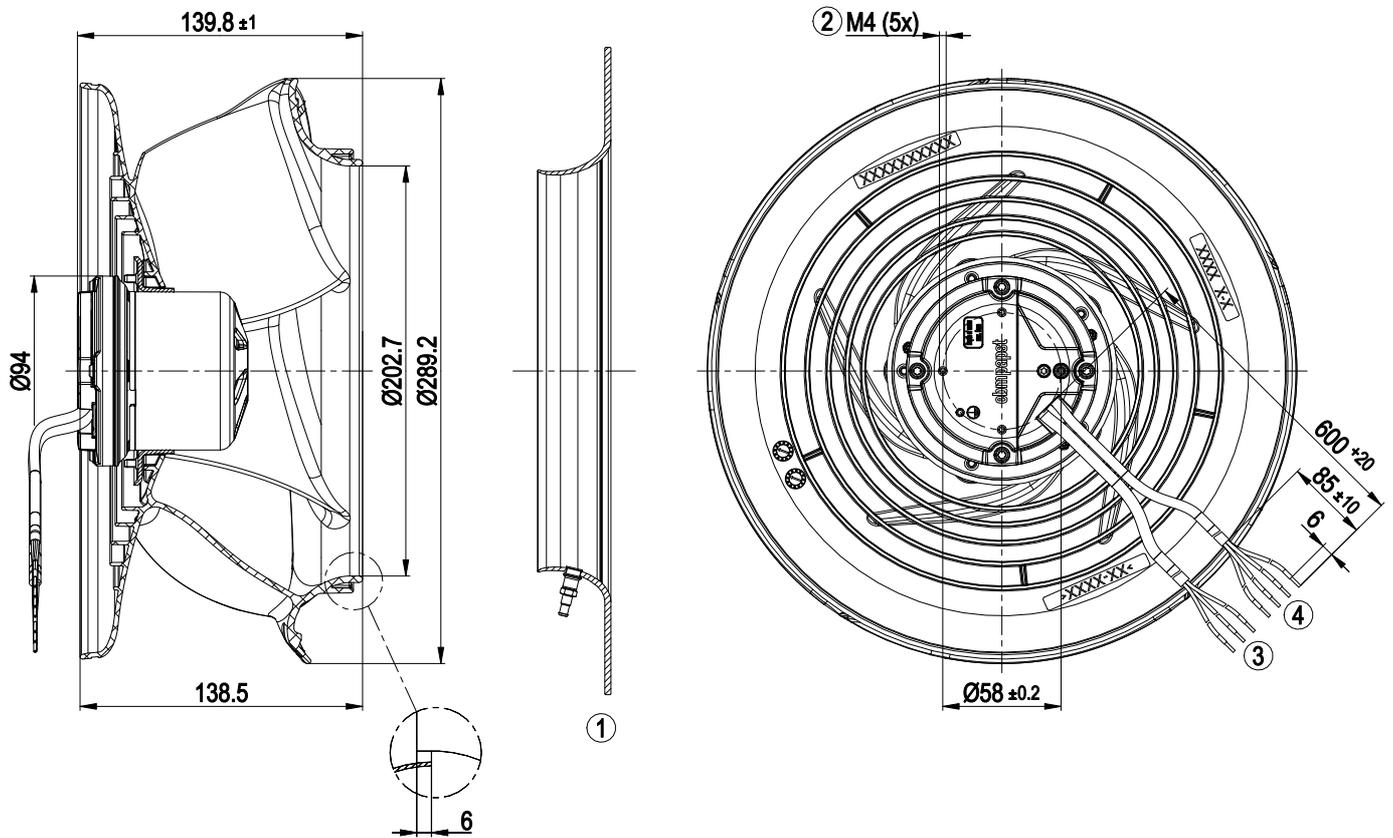

| | |
|---|--|
| 1 | Accessory part: Inlet ring 8217104581 with pressure tap (k-factor: 98) (not included in scope of delivery) |
| 2 | Max. clearance for screw 5 mm |
| 3 | Supply line (PWR) PVC AWG20 3x splice |
| 4 | Control wire (CTRL) PVC AWG22 4x splice |


Accessory part

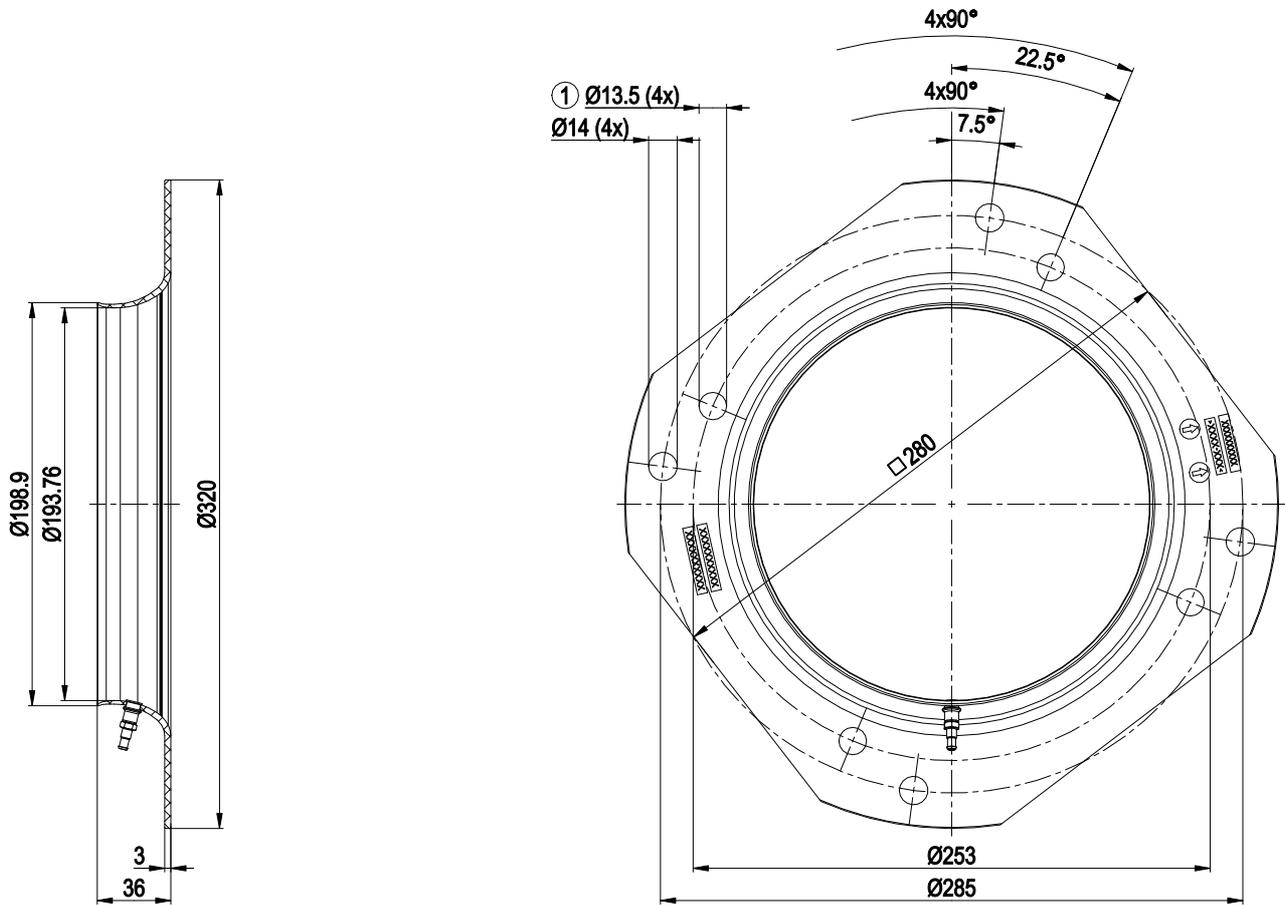

Inlet ring 8217104581 with pressure tap (k-factor: 98)

- | | |
|---|--|
| 1 | Fastening holes for FlowGrid 20280-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required |
|---|--|

Connection diagram

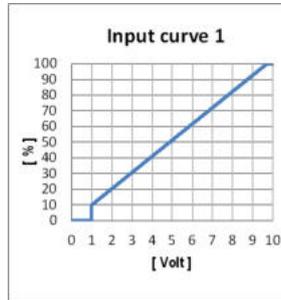

| No. | Conn. | Designation | Color | Function/assignment |
|-----|-------|-------------|--------------|--|
| | PWR | L | black | Power supply, phase, see nameplate for voltage range |
| | PWR | N | blue | Power supply, neutral conductor, see nameplate for voltage range |
| | PWR | PE | green/yellow | Protective earth |
| | | | | |
| | CTRL | GND | blue | Reference ground for control interface, SELV |
| | CTRL | IO1 | yellow | Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table) |
| | CTRL | IO2 | white | Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions) |
| | CTRL | Vout | red | Voltage output 10 VDC +/-3%, Imax=1.1 mA Not short-circuit-proof, power supply for external devices, SELV |


Terminal/plug assignment

| | configurable IO mode | electrical specification | | | | | | |
|------|-------------------------------------|--|---|--|--|--|--|--|
| IO1 | ◦ Din1 (high active): digital input | active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV | | | | | | |
| | ◦ Ain1 0-10 V/PWM: analog input | RI = 100 kΩ, characteristic curve parameterizable, $f_{\text{PWM}} = 1\text{k}..10\text{ kHz}$, SELV | | | | | | |
| | ◦ Tach out (open collector) | Umax=50 VDC, Imax=10 mA, SELV | | | | | | |
| IO2 | ◦ Diagnostics out (open collector) | Umax=50 VDC, Imax=10 mA, SELV | | | | | | |
| | ◦ Alarm out (open collector) | Umax=50 VDC, Imax=10 mA, SELV | | | | | | |
| Vout | ◦ Open collector | Umax=50 VDC, Imax=10 mA, SELV | | | | | | |
| | Voltage output | Voltage 10 VDC, SELV | | | | | | |
| | | | source: set value | | | | | |
| | | | switch: parameter set: #1 / #2 | | | | | |
| | | | switch: direction of rotation: cw / ccw | | | | | |
| | | | switch: enable/disable input | | | | | |
| | | | configurable function | | | | | |
| | | | signal: tach out | | | | | |
| | | | signal: diagnostics out | | | | | |
| | | | signal: alarm out | | | | | |
| | | | signal: run monitoring | | | | | |
| | | | signal: status | | | | | |
| | | | signal: configurable function | | | | | |

Basic (B4) Factory configuration option upon request

- Factory configuration option

Curves: Air performance 50 Hz

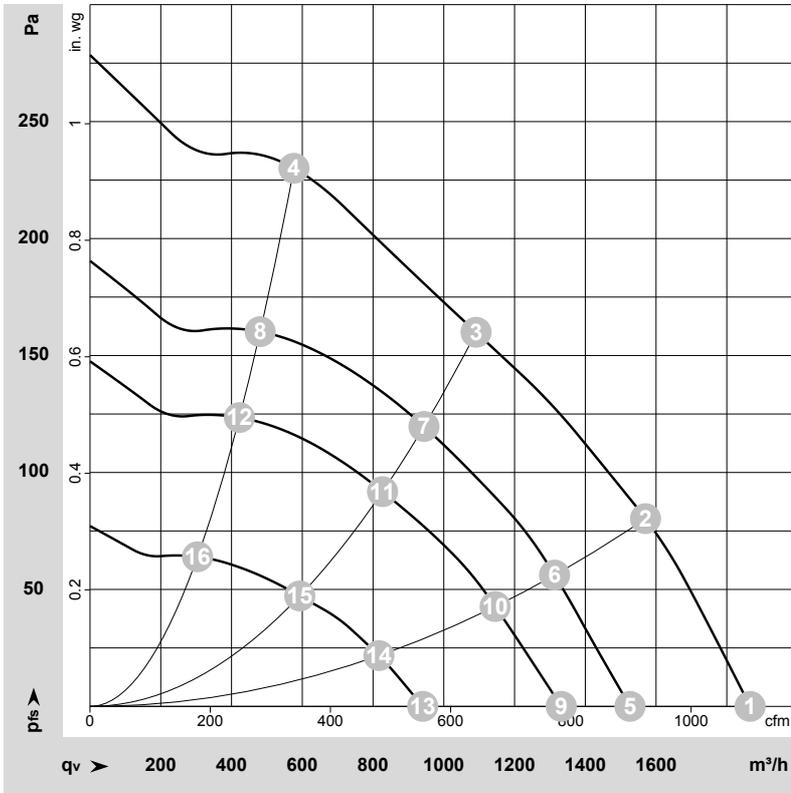

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-220537-1
Date: 2022-03-15
Nozzle: 8217102502

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | Wired | U | f | n | P _e | I | LpA _{in} | LwA _{in} | q _v | P _{fs} | q _v | P _{fs} |
|----|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
| | | V | Hz | min ⁻¹ | W | A | dB(A) | dB(A) | m ³ /h | Pa | cfm | in. wg |
| 1 | 1~ | 230 | 50 | 1750 | 72 | 0.60 | 60 | 68 | 1865 | 0 | 1100 | 0.00 |
| 2 | 1~ | 230 | 50 | 1730 | 85 | 0.70 | 55 | 63 | 1570 | 80 | 925 | 0.32 |
| 3 | 1~ | 230 | 50 | 1675 | 85 | 0.70 | 50 | 58 | 1090 | 160 | 640 | 0.64 |
| 4 | 1~ | 230 | 50 | 1740 | 85 | 0.70 | 52 | 60 | 575 | 230 | 340 | 0.92 |
| 5 | 1~ | 230 | 50 | 1450 | 41 | 0.38 | 55 | 63 | 1525 | 0 | 900 | 0.00 |
| 6 | 1~ | 230 | 50 | 1450 | 51 | 0.45 | 51 | 59 | 1315 | 56 | 775 | 0.22 |
| 7 | 1~ | 230 | 50 | 1450 | 56 | 0.49 | 47 | 55 | 945 | 120 | 555 | 0.48 |
| 8 | 1~ | 230 | 50 | 1450 | 50 | 0.44 | 46 | 55 | 480 | 160 | 285 | 0.64 |
| 9 | 1~ | 230 | 50 | 1275 | 29 | 0.27 | 53 | 61 | 1330 | 0 | 785 | 0.00 |
| 10 | 1~ | 230 | 50 | 1275 | 36 | 0.33 | 49 | 57 | 1145 | 43 | 675 | 0.17 |
| 11 | 1~ | 230 | 50 | 1275 | 39 | 0.35 | 44 | 52 | 825 | 92 | 485 | 0.37 |
| 12 | 1~ | 230 | 50 | 1275 | 35 | 0.32 | 43 | 52 | 420 | 124 | 250 | 0.50 |
| 13 | 1~ | 230 | 50 | 920 | 13 | 0.13 | 45 | 54 | 940 | 0 | 555 | 0.00 |
| 14 | 1~ | 230 | 50 | 920 | 16 | 0.15 | 42 | 50 | 815 | 22 | 480 | 0.09 |
| 15 | 1~ | 230 | 50 | 915 | 17 | 0.16 | 37 | 46 | 595 | 47 | 350 | 0.19 |
| 16 | 1~ | 230 | 50 | 920 | 15 | 0.15 | 34 | 42 | 305 | 64 | 180 | 0.26 |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · P_{fs} = Pressure increase