

8300100490  
VBS0560STTPS

# EC centrifugal fan - RadiCal

backward-curved, single-intake

8300100490 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

Limited partnership · Headquarters Mulfingen  
Amtsgericht (court of registration) Stuttgart · HRA 590344  
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Item	8300100490	
Motor	E15037-85	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	1880
Power consumption	W	4000
Current draw	A	5.8
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	72.4	57.8	09 Power consumption $P_{ed}$	kW	3.97
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	11020
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	904
04 Efficiency grade N		76.6	62	10 Speed (rpm) n	min <sup>-1</sup>	1875
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-219585

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).  
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.  
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

## Technical description

<b>Weight</b>	28.86 kg
<b>Size</b>	560 mm
<b>Motor size</b>	150
<b>Rotor surface</b>	Painted black
<b>Terminal box material</b>	Die-cast aluminum
<b>Impeller material</b>	PP plastic
<b>Number of blades</b>	6
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP55
<b>Insulation class</b>	"F"
<b>Moisture (F) / Environmental (H) protection class</b>	H1
<b>Ambient temperature note</b>	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	Shaft horizontal or rotor on bottom; rotor on top on request
<b>Condensation drainage holes</b>	On rotor side
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing; (sealed)
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Operation and alarm display with LED</li> <li>- External 15-50 VDC input (parameterization)</li> <li>- Alarm relay</li> <li>- Integrated PI controller</li> <li>- Configurable inputs/outputs (I/O)</li> <li>- MODBUS V6.4</li> <li>- Motor current limitation</li> <li>- PFC, active</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Voltage output 3.3-24 VDC, Pmax = 800 mW</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> <li>- Vibration sensor</li> </ul>
<b>EMC immunity to interference</b>	According to EN 61000-6-2 (industrial environment)
<b>EMC circuit feedback</b>	According to EN 61000-3-2/3
<b>EMC interference emission</b>	According to EN 61000-6-4 (industrial environment)
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical hookup</b>	Terminal box
<b>Motor protection</b>	Electronic motor protection
<b>Protection class assignment</b>	I; If a protective earth is connected to the PE connection point. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.


8300100490  
VBS0560STTPS

# EC centrifugal fan - RadiCal

backward-curved, single-intake

<b>Conformity with standards</b>	EN 61800-5-1; UKCA; CE
<b>Approval</b>	UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC

Product drawing

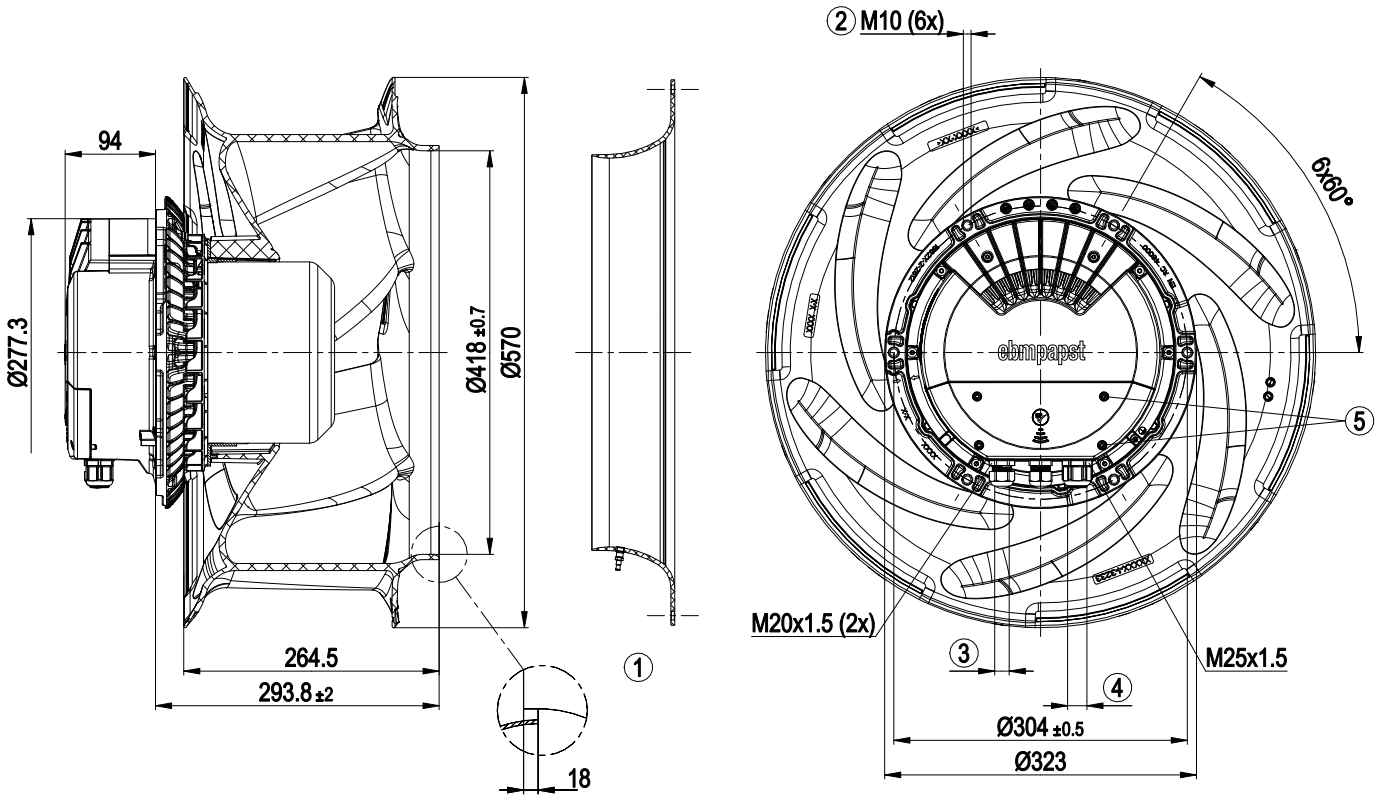


1	Accessory part: Inlet ring 56356-2-2943 with pressure tap (k-factor: 410) not included in scope of delivery
2	Max. clearance for screw 20 mm
3	Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm
4	Cable diameter min. 5 mm, max. 14 mm, tightening torque $6 \pm 0.9$ Nm
	(The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
5	Tightening torque $3 \pm 0.3$ Nm

8300100490  
VBS0560STTPS

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Accessory part

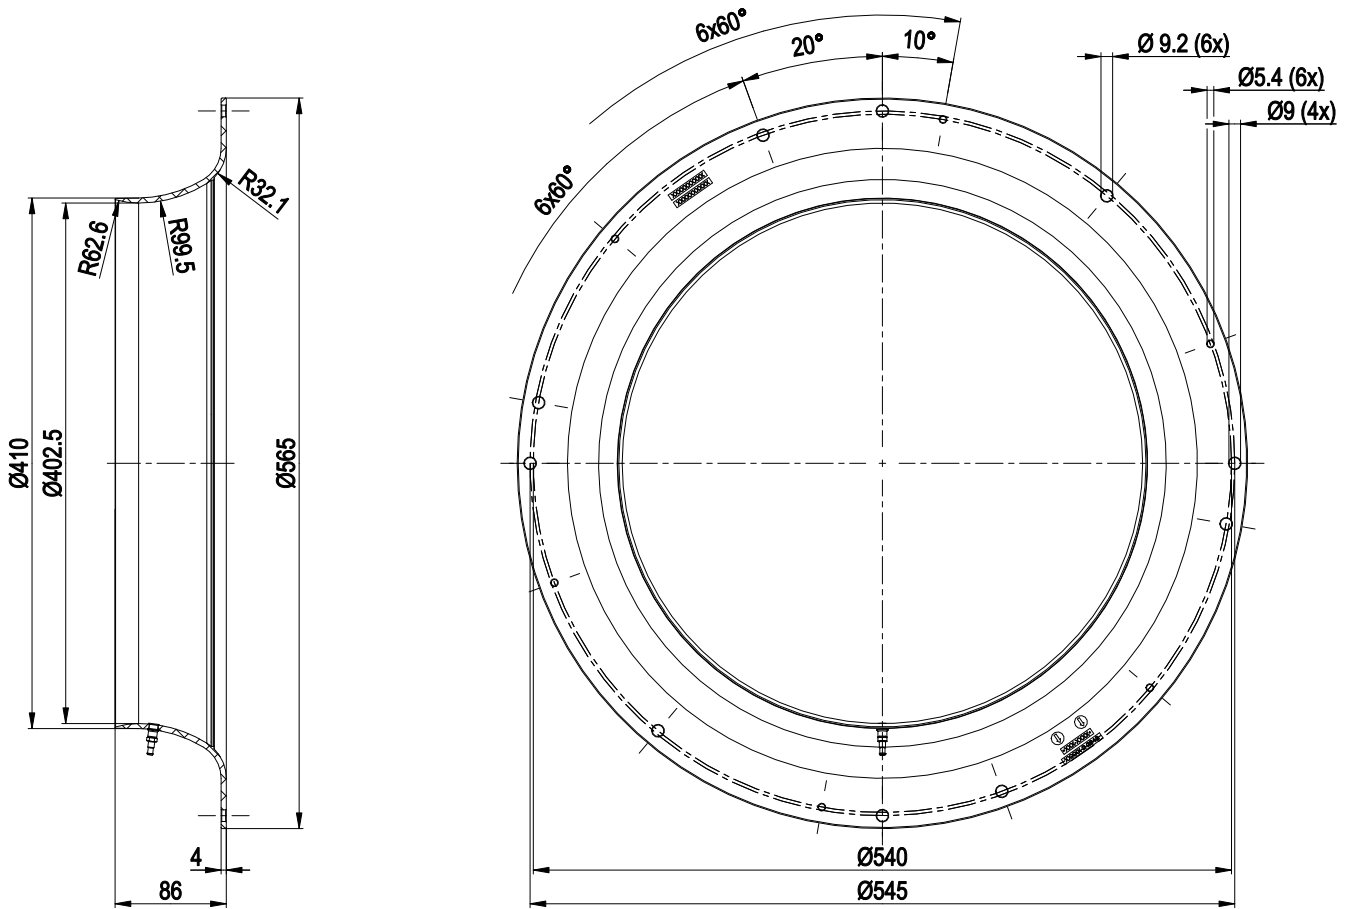


Inlet ring 56356-2-2943 with pressure tap (k-factor: 410)

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Connection diagram

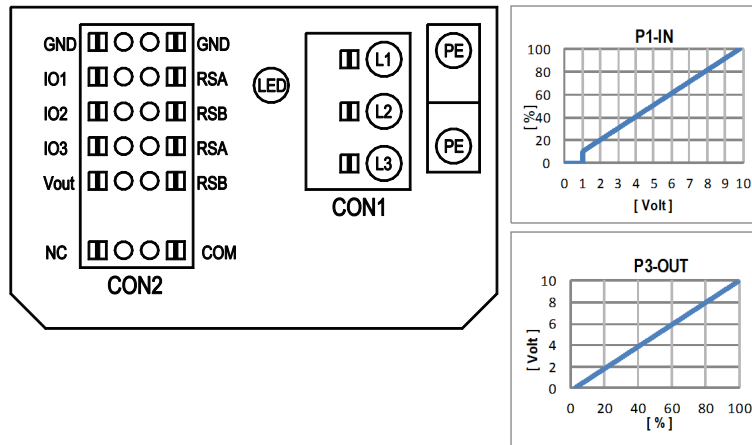

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Actual speed Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC +/-5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve


## Terminal/plug assignment

CON2	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	
			MODBUS Register for IO mode	configuration
IO1	◦ Din1 (active high), digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	D158 [0]	
	◦ Ain1 0-10V/PWM: analog input	RI = 100k, characteristic curve parameterizable, f <sub>PWM</sub> = 1k..10kHz, SELV	D158 [2]	
	◦ Tach out (open collector output)	U <sub>max</sub> = 50VDC, I <sub>max</sub> = 20mA, SELV	D158 [5]	
	◦ Diagnostics out (open collector output)	U <sub>max</sub> = 50VDC, I <sub>max</sub> = 20mA, SELV	D158 [6]	
IO2	◦ Din2 (active high), digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	D159 [0]	
	◦ Ain2 0-10V/PWM: analog input	RI = 100k, characteristic curve parameterizable, f <sub>PWM</sub> = 1k..10kHz, SELV	D159 [2]	
	◦ Ain2 4-20mA: analog input	RI = 125R, characteristic curve parameterizable, SELV	D159 [3]	
	◦ Din3 (active high), digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	D15A [0]	
IO3	◦ Din3 (active low), digital input	active: applied voltage < 1.5VDC, SELV not active: pin open or applied voltage 3.5-50VDC	D15A [1]	
	◦ PWMIn3: digital input idle level high	PWM = 40Hz - 10kHz, characteristics parameterizable	D15A [7]	
	◦ PWMIn3: digital input idle level low	active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	D15A [8]	
	◦ Aout3 0-10V: analog output	function parameterizable, max. 5mA, max output frequency 300Hz, SELV	D15A [4]	
RSA	◦ Tacho out (pulses), analog output	0-10V/max. 5mA, max output frequency 300Hz, SELV	D15A [5]	
	◦ Diagnostics out (pulses)	0-10V/max. 5mA, max output frequency 300Hz, SELV	D15A [6]	
	◦ Diagnostics out (pulses)	MODBUS RTU, specification V6.4, SELV		
RSB	RS485 bus connection,			
Vout	voltage output	voltage parameterizable 3.3...24VDC +/- 5%, P <sub>max</sub> =800mW, short-circuit-proof, supply for external devices, SELV	D16E [..]	
	alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	15...50VDC		

terminal	description	input/output	switch	source
D101 [..]	source: set value			o
D147 [..]	source: sensor value			o
D104 [..]	switch: parameter set: #1 / #2			o
D12E [..]	switch: control function: heating (pos.) cooling (neg.)			o
D148 [..]	switch: direction of rotation: cw / ccw			o
D16C [..]	switch: set value source			o
D16A [..]	switch: fan enable / disable			o
(selected directly via IO mode)	signal: tach out			o
(selected directly via IO mode)	signal: diagnostics out			o
D130 [0]	signal: fan modulation level %			o
D130 [1]	signal: actual speed			o
D130 [2]	signal: system modulation level %			o
D130 [5]	signal: remote control output 0-10V			o
D00C [1]	pulse input for auto-addressing			o
D130 [4]	pulse output for auto-addressing			

◦ configurable option  
For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.4

## Curves: Air performance 50 Hz

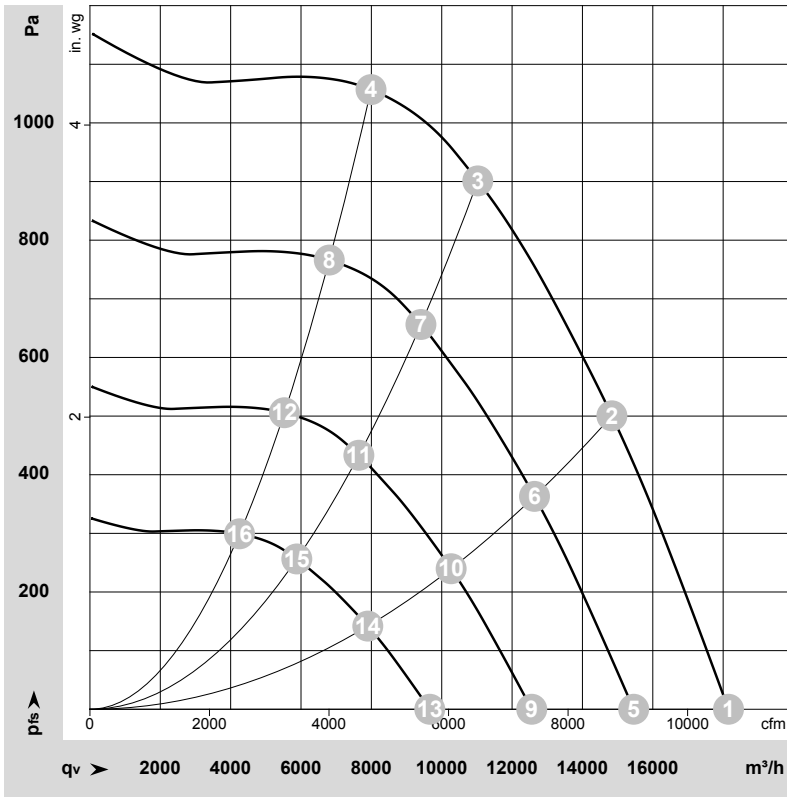

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-219585-1  
Date: 2026-05-24  
Nozzle: 56350-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	LwA	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	dB	m <sup>3</sup> /h	Pa	cfm	in. wg
1	3~	400	50	1880	2428	3.51	81	89	94	95	18150	0	10685	0.00
2	3~	400	50	1880	3614	5.22	76	83	90	91	14835	500	8735	2.01
3	3~	400	50	1880	4000	5.80	72	80	86	87	11025	900	6490	3.61
4	3~	400	50	1880	3817	5.51	77	84	89	90	7990	1050	4705	4.22
5	3~	400	50	1600	1499	2.17	77	85	90	91	15455	0	9100	0.00
6	3~	400	50	1600	2233	3.22	72	79	86	87	12635	365	7440	1.47
7	3~	400	50	1600	2476	3.57	68	76	82	83	9410	658	5540	2.64
8	3~	400	50	1600	2354	3.40	73	80	85	86	6805	769	4005	3.09
9	3~	400	50	1300	804	1.16	72	80	84	86	12560	0	7390	0.00
10	3~	400	50	1300	1198	1.73	66	74	81	81	10270	241	6045	0.97
11	3~	400	50	1300	1328	1.92	62	70	76	77	7645	435	4500	1.75
12	3~	400	50	1300	1263	1.82	68	75	80	81	5530	508	3255	2.04
13	3~	400	50	1000	366	0.53	65	73	78	79	9660	0	5685	0.00
14	3~	400	50	1000	545	0.79	60	67	74	75	7900	143	4650	0.57
15	3~	400	50	1000	605	0.87	56	64	70	71	5880	257	3460	1.03
16	3~	400	50	1000	575	0.83	61	69	73	74	4250	300	2505	1.20

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase