

8300100550  
VBH0450CTRLS

# EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Item                     | 8300100550        |            |
| Motor                    | E11229-60         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Status                   |                   | prelim.    |
| Speed (rpm)              | min <sup>-1</sup> | 2110       |
| Power consumption        | W                 | 1430       |
| Current draw             | A                 | 2.2        |
| Min. ambient temperature | °C                | -40        |
| Max. ambient temperature | °C                | 40         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

|                                   |   | Actual | Req. 2015 |                                |                   |      |
|-----------------------------------|---|--------|-----------|--------------------------------|-------------------|------|
| 01 Overall efficiency $\eta_{es}$ | % | 71.4   | 53        | 09 Power consumption $P_{ed}$  | kW                | 1.4  |
| 02 Measurement category           |   | A      |           | 09 Air flow $q_v$              | m <sup>3</sup> /h | 5960 |
| 03 Efficiency category            |   | Static |           | 09 Pressure increase $p_{fs}$  | Pa                | 564  |
| 04 Efficiency grade N             |   | 80.4   | 62        | 10 Speed (rpm) n               | min <sup>-1</sup> | 2110 |
| 05 Variable speed drive           |   | Yes    |           | 11 Specific ratio <sup>*</sup> |                   | 1.01 |

Data obtained at optimum efficiency level.

<sup>\*</sup> Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-221184

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).

The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



8300100550  
VBH0450CTRLS

## EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

### Technical description

|  |   |
|--|---|
| Size   | 450 mm  |
| Motor size   | 112   |
| Rotor surface  | Painted black   |
| Terminal box material  | PP plastic  |
| Electronics housing material   | Die-cast aluminum   |
| Impeller material  | PP plastic  |
| Support plate material   | Sheet steel, galvanized   |
| Support bracket material   | Steel, painted black  |
| Inlet nozzle material  | ABS plastic   |
| Number of blades   | 5   |
| Direction of rotation  | Clockwise, viewed toward rotor  |
| Degree of protection   | IP55  |
| Insulation class   | "F"   |
| Moisture (F) / Environmental (H) protection class                          | H1  |
| Ambient temperature note   | Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.  |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C  |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C  |
| Installation position  | See legend on product drawing   |
| Condensation drainage holes  | On rotor side   |
| Mode   | S1  |
| Motor bearing  | Ball bearing  |
| Technical features   | <ul style="list-style-type: none"><li>- Output 10 VDC, max. 10 mA</li><li>- Operation and alarm display</li><li>- External 24 V input (parameter setting)</li><li>- Alarm relay</li><li>- Integrated PID controller</li><li>- MODBUS V5.1</li><li>- Motor current limitation</li><li>- PFC, passive</li><li>- RS-485 MODBUS-RTU</li><li>- Soft start</li><li>- EEPROM write cycles: 100,000 maximum</li><li>- Control input 0-10 VDC / PWM</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Thermal overload protection for electronics/motor</li><li>- Line undervoltage / phase failure detection</li></ul> |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA   |
| Electrical hookup  | Terminal box  |
| Motor protection   | Thermal overload protector (TOP) internally connected   |



8300100550  
VBH0450CTRLS

# EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

|                                    |  |
|------------------------------------|--|
| <b>Protection class assignment</b> | I; If a protective earth is connected by the customer<br>This component for installation may have several local protection classes. This information relates to this component's basic design.<br>The final protection class is based on the component's intended installation and connection. |
| <b>Conformity with standards</b>   | EN 61800-5-1; CE; UKCA   |
| <b>Approval</b>                    | CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1  |



8300100550


VBH0450CTRLS

# EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

## Product drawing

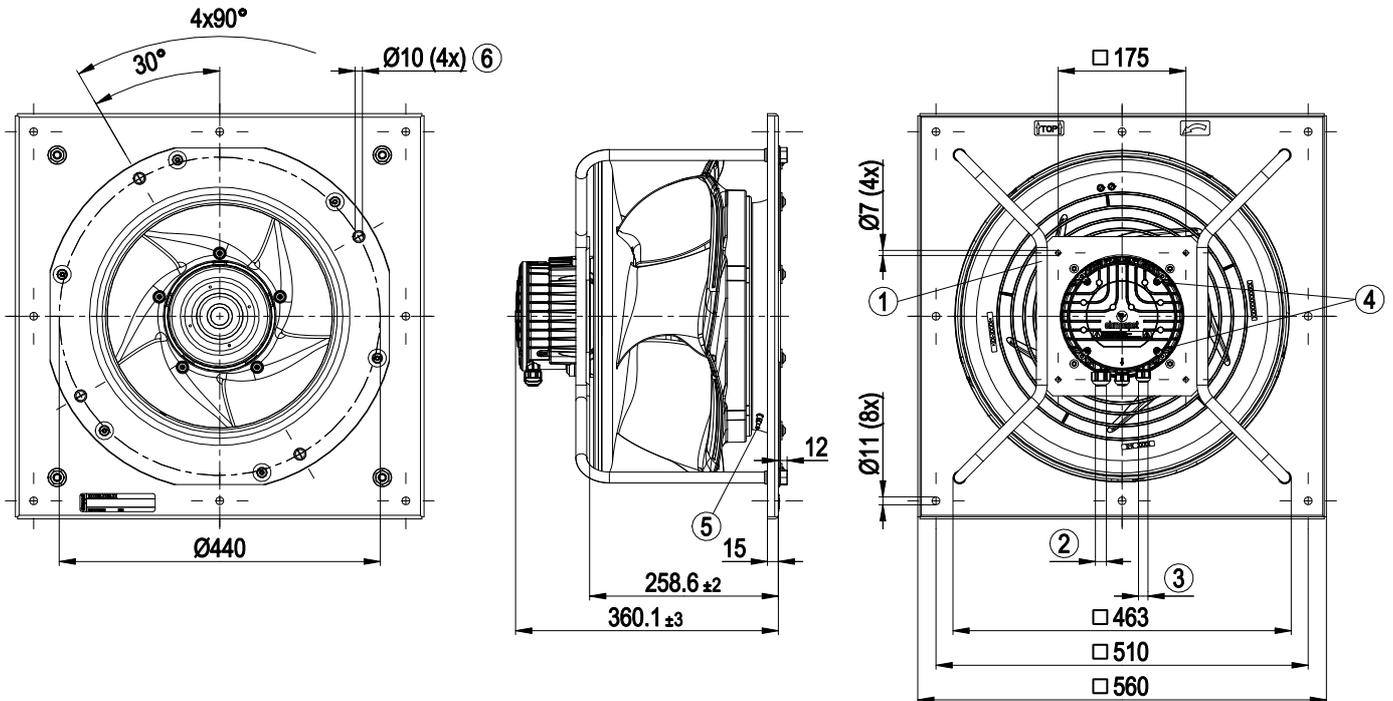


|   |  |
|---|--|
| 1 | Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request   |
| 2 | Cable diameter min. 8 mm, max. 12 mm, tightening torque $1.8 \pm 0.3$ Nm (use must be made of seal provided)<br>Cable diameter min. 4 mm, max. 10 mm, tightening torque $1.8 \pm 0.3$ Nm |
| 3 | Cable diameter min. 6 mm, max. 10 mm, tightening torque $1.8 \pm 0.3$ Nm (use must be made of seal provided)<br>Cable diameter min. 4 mm, max. 7 mm, tightening torque $1.8 \pm 0.3$ Nm  |
| 4 | Tightening torque $1.5 \pm 0.2$ Nm   |
| 5 | Inlet ring with pressure tap (k-factor: 232)   |
| 6 | Fastening holes for FlowGrid 35505-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required   |



# EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

## Connection diagram

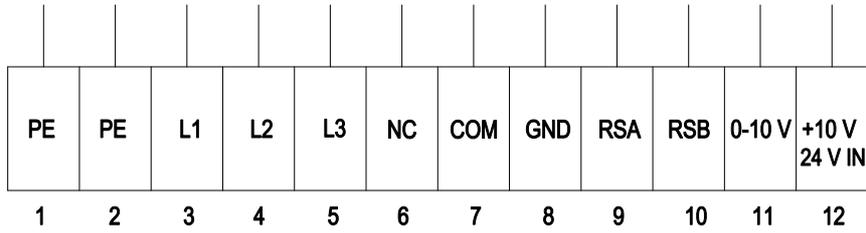


| No. | Conn.  | Designation | Function/assignment  |
|-----|--------|-------------|--|
| 1   | PE     | PE          | Protective earth   |
| 2   | PE     | PE          | Protective earth   |
| 3   | L1     | L1          | Power supply   |
| 4   | L2     | L2          | Power supply   |
| 5   | L3     | L3          | Power supply   |
| 6   | NC     | NC          | Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side                           |
| 7   | COM    | COM         | Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side                           |
| 8   | GND    | GND         | Reference ground for control interface, SELV   |
| 9   | RSA    | RSA         | RS485 interface for MODBUS, RSA; SELV  |
| 10  | RSB    | RSB         | RS485 interface for MODBUS, RSB; SELV  |
| 11  | 0-10 V | 0-10 V      | Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve   |
| 12  | +10 V  | +10 V       | Fixed voltage output 10 VDC, SELV, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot);<br>fixed voltage input 24 VDC for setting parameters via MODBUS without line voltage supply |



# EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

## Curves: Air performance 50 Hz

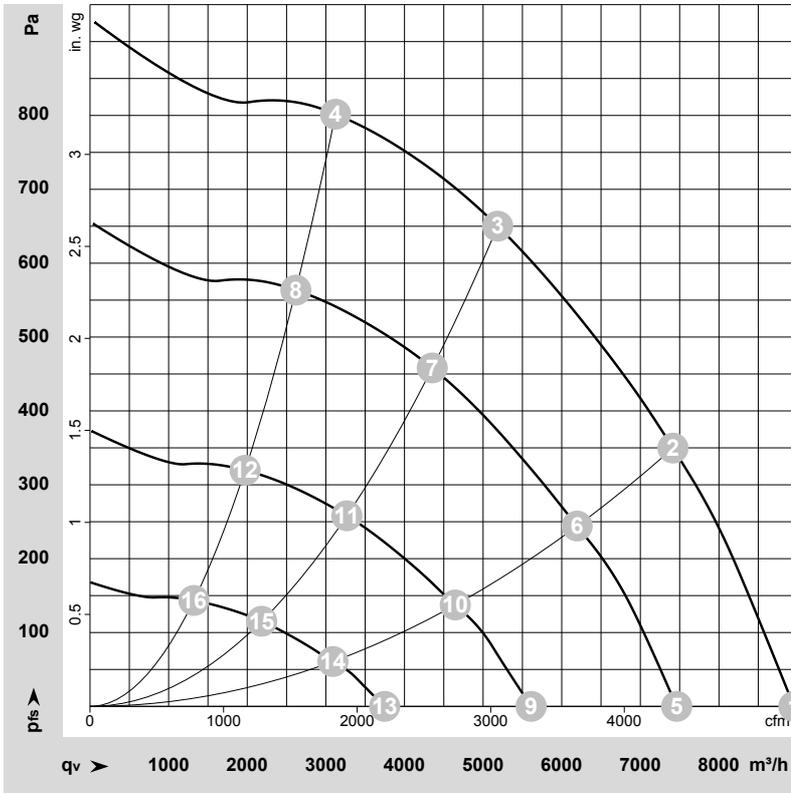

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-221184-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | LwA | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|-----|-------------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | dB  | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 3~    | 400 | 50 | 2110              | 1003           | 1.55 | 79                | 87                | 91                 | 92  | 8955              | 0               | 5270           | 0.00            |
| 2  | 3~    | 400 | 50 | 2110              | 1246           | 1.91 | 73                | 81                | 85                 | 86  | 7415              | 350             | 4365           | 1.41            |
| 3  | 3~    | 400 | 50 | 2110              | 1430           | 2.20 | 70                | 76                | 81                 | 82  | 5185              | 650             | 3050           | 2.61            |
| 4  | 3~    | 400 | 50 | 2110              | 1297           | 1.99 | 73                | 80                | 84                 | 85  | 3125              | 800             | 1840           | 3.21            |
| 5  | 3~    | 400 | 50 | 1770              | 616            | 0.98 | 74                | 82                | 86                 | 88  | 7460              | 0               | 4390           | 0.00            |
| 6  | 3~    | 400 | 50 | 1770              | 749            | 1.18 | 69                | 76                | 81                 | 82  | 6195              | 244             | 3645           | 0.98            |
| 7  | 3~    | 400 | 50 | 1770              | 855            | 1.33 | 65                | 72                | 77                 | 78  | 4355              | 460             | 2560           | 1.85            |
| 8  | 3~    | 400 | 50 | 1770              | 777            | 1.22 | 68                | 75                | 79                 | 80  | 2620              | 564             | 1540           | 2.26            |
| 9  | 3~    | 400 | 50 | 1335              | 289            | 0.53 | 67                | 75                | 79                 | 80  | 5610              | 0               | 3305           | 0.00            |
| 10 | 3~    | 400 | 50 | 1330              | 348            | 0.60 | 61                | 69                | 74                 | 75  | 4645              | 137             | 2735           | 0.55            |
| 11 | 3~    | 400 | 50 | 1330              | 391            | 0.66 | 58                | 64                | 70                 | 71  | 3265              | 259             | 1925           | 1.04            |
| 12 | 3~    | 400 | 50 | 1330              | 360            | 0.62 | 60                | 67                | 71                 | 72  | 1970              | 320             | 1160           | 1.28            |
| 13 | 3~    | 400 | 50 | 895               | 109            | 0.29 | 58                | 66                | 71                 | 72  | 3750              | 0               | 2205           | 0.00            |
| 14 | 3~    | 400 | 50 | 895               | 126            | 0.32 | 52                | 60                | 65                 | 67  | 3090              | 61              | 1820           | 0.24            |
| 15 | 3~    | 400 | 50 | 895               | 138            | 0.33 | 48                | 55                | 61                 | 62  | 2185              | 116             | 1285           | 0.47            |
| 16 | 3~    | 400 | 50 | 895               | 129            | 0.32 | 49                | 56                | 61                 | 62  | 1320              | 144             | 780            | 0.58            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

